
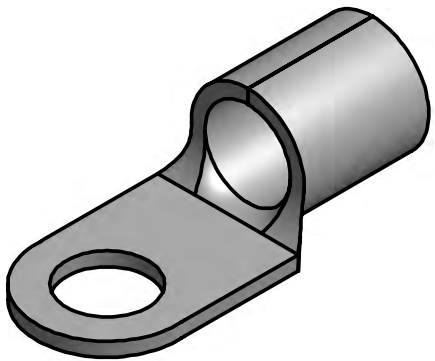


CATALOG NUMBER	WIRE RANGE	STUD SIZE [METRIC SIZE]	HYDRAULIC TOOLING				DIELESS TOOLING	NO. OF CRIMPS	WIRE STRIP LENGTH
			DIE INDEX	TOOL CAT. NO.	DIE TYPE	DIE CAT. NO.			
YAD1CM10E38	#1 AWG STR.CU CODE & FLEX [35 - 50] mm ²	3/8" [10]	1019	Y35, Y39, Y750, PAT750	NEST	UV26L	Y81KFT- SERIES PAT81KFT- SERIES Y4PC834- SERIES PAT4PC834- SERIES	1	3/4"
					INDENTOR	Y34PA			

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	10/30/12	CREATE INDIVIDUAL SALES DRAWINGS AS PER MARK-UP	29245	VK	MA

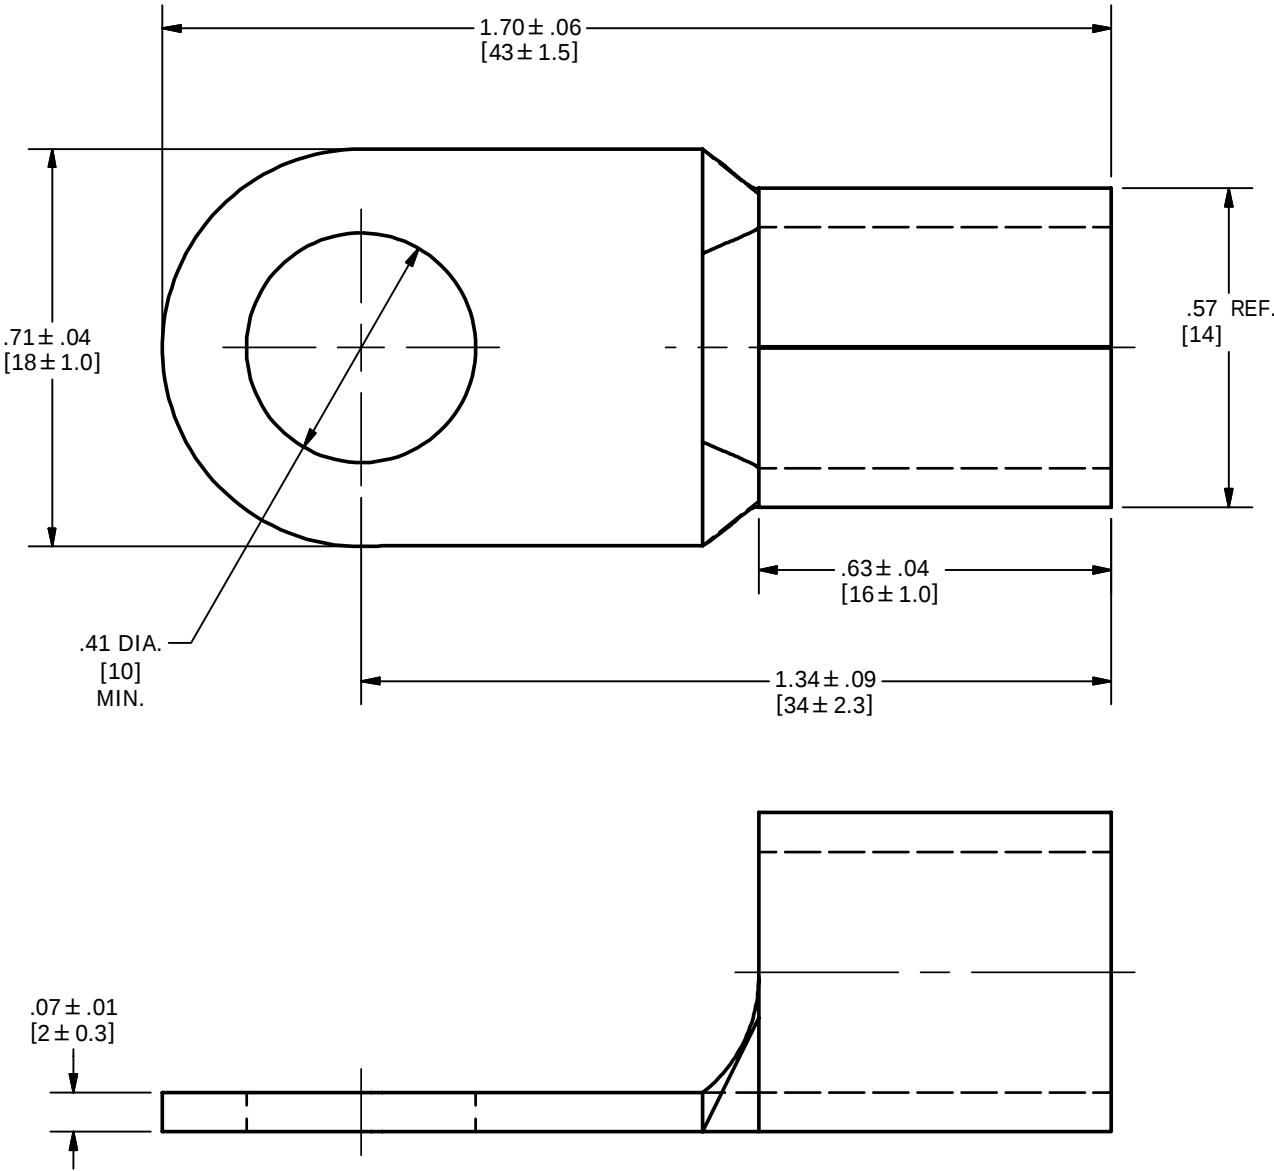

- NOTES:
1. MATERIAL: COPPER.
 2. FINISH: TIN PLATED.
 3. Y35P3 ADAPTOR REQUIRED FOR Y34PA INDENTORS IN Y35, Y39, Y750 AND PAT750 TOOLS.
 4. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE NOTED, AND ARE FOR REFERENCE ONLY.

TO ORDER BURNDY PRODUCTS CALL UNITED STATES 1-800-346-4175 (LONDONDERRY, NH) CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES) FOR PRODUCT INFO: http://www.burndy.com		NON-INSULATED BRAZED BARREL COPPER TERMINAL	
		ITEM NO: 50002413	
CAT. NO: YAD1CM10E38		DRAWN BY: V KAMAL 10/30/12	
CHECKER: J MICHAUD 11/27/12		DSN APRVL: J MICHAUD 11/27/12	
MFG APRVL: --		QA APRVL: C KOWALCZYK 11/29/12	
MKT APRVL: S GALE 11/21/12		PROD FAM:	
PROJECT #:		SIZE	DRAWING NO
DOCUMENT TYPE: Sales		B	50013718
REL LEVEL: Released		SHEET 1 OF 1	
		REV	
		A	