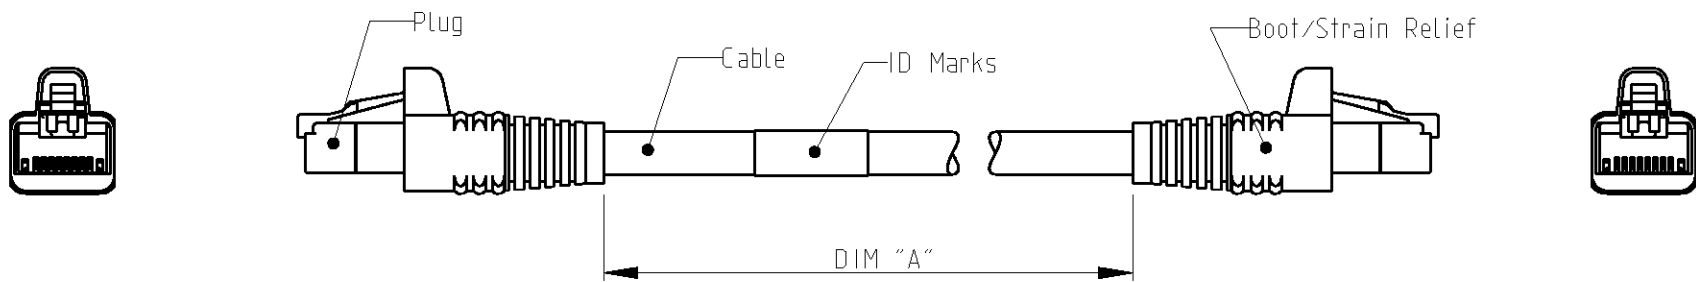




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
1K	2		A2	DWG HAS BEEN UPDATED	03-Aug-09	JG	JS



SCHEMATIC VIEW

1. RJ45 Cat 6 PATCH CABLE ASSEMBLIES ARE USED AS PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.
2. FOR AVAILABLE DASH LENGTHS, DIM A SEE THE TYCO ELECTRONICS CATALOG

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN J.GATNAU 03-Aug-09		<div><div></div><div>Tyco Electronics</div></div> <div>Tyco Electronics AMP España, S.A. Barcelona. Spain.</div>			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK M.MAQUEDA 03-Aug-09					
		APVD J.SANBARA 03-Aug-09					
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	PRODUCT SPEC 108-93017		NAME PATCH CORD RJ45 Cat 6 UTP LSZH STRANDED YELLOW			
		APPLICATION SPEC -					
		WEIGHT -					
MATERIAL -	FINISH -	CUSTOMER DRAWING		SIZE A3	CAGE CODE -	DRAWING NO C=1711097	RESTRICTED TO -
				SCALE 1:1	SHEET 1	OF 1	REV A2