


TECHNICAL DATA SHEET	Code	70007E
	Version	2
2x2xAWG 22/7 (QUAD)	Date	2010-02-02
PROFINET TYPE B PVC	Page	1/2

CONSTRUCTION

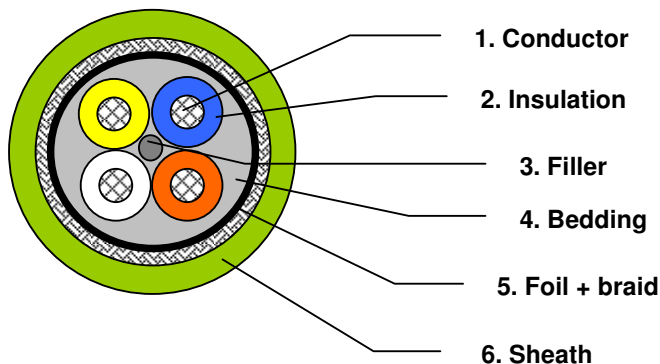

1. Conductor	7x0.25 mm (22AWG) stranded tinned copper
2. Insulation	
Material	Polyolefin
Diameter over insulation	1.57 ± 0.0.5 mm
Colour of insulation	White, Blue and Yellow, Orange
3. Filler	
4. Bedding	
Material	PVC
Nom. Diameter	4.1 mm
5. Foil + Braid	
Material	Aluminium / Polyester
Thickness of aluminium	50 µm
Coverage of braided screen	> 85%
6. Sheath	
Material	PVC oil resistant
Colour	Green RAL 6018
Diameter over jacket	6.50 +/- 0.2 mm
Colour	

TECHNICAL DATA SHEET	Code	70007E
	Version	2
2x2xAWG 22/7 (QUAD)	Date	2010-02-02
PROFINET TYPE B PVC	Page	2/2

REQUIREMENTS AND TEST METHODS

Electrical:

ISO/IEC 11801 ed. 2.0, Cat.5.		
Max. operating voltage UL	300	V rms
Test voltage wire-wire/wire-screen	2.5k	Vdc
Maximum conductor DC-resistance @ 20°C	57.1	Ω/km
Transfer impedance @ 10MHz	< 10	mOhm/m
Nom. velocity of propagation 68 %		
Delay	< 5.3	ns/m
Impedance @ 1 – 100 MHz	100 +/- 15	Ω

Frequency (MHz)	Nom. Attenuation (dB/100m)	Min. Next (dB)	Min. ELFEXT (dB/100m)	Min. SRL (dB)
1	2.1	65	64	-
4	4	56	52	23
10	6.3	50	44	25
16	8	47	40	25
31.25	11.4	43	34	23.6
62.5	16.5	38	28	21.5
100	21.3	35	24	20.1

Mechanical and physical:

Flame resistance	IEC 60332-1
Oil resistance	IEC 60811-2-1
Temperature range installing	- 5 to + 50 °C
Temperature range operating	- 25 to + 80 °C
Temperature range storage	- 40 to + 80 °C



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.