
	TECHNICAL DATA SHEET	code	3077ENH
		version	4
		date	2005-12-20
	3077ENH	page	1/2

APPLICATION

Instrumentation and computer cable for Data Transmission applications.

CONSTRUCTION

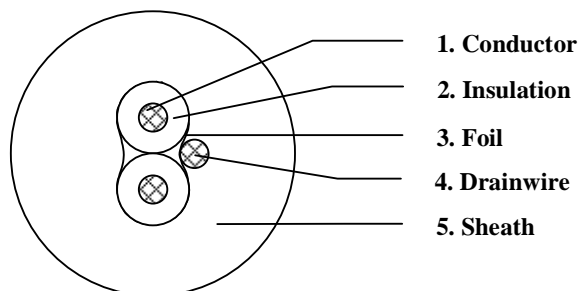

1. Conductor	22 AWG (7x30AWG) tinned copper wire
2. Insulation	
Material	Polyolefin
Diameter over insulation	1.50 ± 0.05 mm
Nominal insulation thickness	0.375 mm
Colour of insulation	White and Black
3. Foil	
Material	Aluminium / Polyester
Thickness	9 / 23 µm
4. Drainwire	22 AWG (7x30AWG) tinned copper wire
5. Sheath	
Material	FRNC
Nominal jacket thickness	2.15 mm
Nominal diameter over jacket	7.5 mm
Colour	Available in the colours Orange en Blue.

REQUIREMENTS AND TEST METHODS


Electrical:

Max. operating voltage	300	V rms
Max. capacitance between conductors of a pair @ 1kHz	85	nF/km
Max. capacitance conductor to other cond. and shield @ 1kHz	160	nF/km
Max. conductor DC-resistance @ 20°C	52.5	Ω/km
Max. shield DC-resistance @ 20°C	41.5	Ω/km
Nom. velocity of propagation	66	%
Impedance @ 31.25 kHz	100	+/- 5Ω
Max. attenuation @ 10 kHz	0.60	dB/100m
@ 39 kHz	0.67	dB/100m
@ 100 kHz	0.90	dB/100m
@ 500 kHz	3.50	dB/100m
@ 1 MHz	5.10	dB/100m

Mechanical and physical:

© Belden Wire & Cable B.V.

All rights are reserved. Reproduction in whole or in part is prohibited without the written consent of the copyright owner

	TECHNICAL DATA SHEET	code	3077ENH
		version	4
		date	2005-12-20
	3077ENH	page	2/2

Flame resistance	IEC 60332-3C
Oil resistance	ASTMD741
Radiation resistance	IEC544 (CERN)
Application specification	BS 7655 section 6.1 table 1, LTS 3
Halogen content according to IEC754-1	zero
Corrosivity of fire gasses according to IEC754-2	
Conductivity	≤ 100 μS/cm
pH value	≥ 3.5
Temperature range installing	-15 to +80 °C
Temperature range operating (moving installation)	-15 to +80 °C
Temperature range operating (fixed installation)	-45 to +80 °C
Temperature range storage	-45 to +80 °C
Minimum bending radius	100 mm
Maximum pulling tension	50 N

MARKING

Colour code 3356: orange sheath with text:

Colour code 3357: blue sheath with text:


‘BELDEN V 3077ENH 1PR 22AWG SHIELDED LSNH FIELDBUS CABLE IEC 332-3C’

PACKAGING

On non-returnable reels with a nominal length of 500m (-0, +0%) or on non-returnable reels with a nominal length of 1000m (-0, +0%).

Each reel is labelled with the following data:

Belden Logo. Belden code number. Item description. Length on the reel. Date of manufacture. CE-marking.

	TECHNICAL DATA SHEET		code	3077ENH
			version	4
			date	2005-12-20
	3077ENH		page	3/2



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.