




## 0970 PSL 701



## **Profibus I/O Modules with 16-Digital Inputs**

### **16 IN**

Profibus-DP device with 16 digital inputs to connect standard sensors, combined M12 socket, rotary switches for addressing, M12 bus connection, 7/8" power supply.

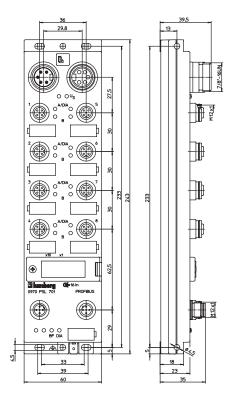


### **Bit Assignment**

Bit	7	6	5	4	3	2	1	0
M12 Input								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
Byte 1	8B	8A	7B	7A	6B	6A	5B	5A

#### **Diagnostic Indication**

LED	Indication	Condition
18 A/B	yellow	channel status
18 A/DIA	red	periphery fault
Us	green	sensor/system power supply
BF	red	bus error
DIA	red	common indication for periphery faults

### **Pin Assignment**





# Be Certain with Belden

## **Profibus I/O Modules with 16-Digital Inputs**

0970 PSL 701

### **Technical Data**

**Environmental** 

Degree of protection IP 67

Operating temperature range -10°C (+14°F) to +60°C (+140°F)

Mechanical

Weight 380 g Housing material PBT

 Bus system
 Profibus

 ID number
 09CA hex

 GSD file
 Lum\_09CA.GSD

 Transmission rate
 max. 12 MBaud

 Address range
 1-125 dec

 Rotary address switches
 1-99 dec

 Default address
 99 dec

System/Sensors power supply

Rated voltage 24 V DC
Voltage range 19–30 V DC
Power consumption 120 mA
Reverse polarity protection yes

Input power supply Us

Voltage range min. (USystem - 1.5 V)

Sensor current 100 mA (at Tamb 30°C) per socket

Short circuit-proof yes

Indication LED green

Inputs Type 3 acc. to IEC 61131-2

Rated input voltage 24 V DC
Channel type N.O. p-switching
Number of digital channels max. 16

Channel status indicator LED yellow per channel Diagnostic indication LED red per channel

### Diagnostic

Module diagnostic and single channel diagnostic according to Profibus specification (please see operating instructions under www.beldensolutions.com/downloads)

Included in delivery/accessories

Dust covers M12 2 pieces
Attachable labels 10 pieces

# **Part Number**

0970 PSL 701



The application of these products in harsh environments should always be checked before use. Specifications subject to alteration.