

Electronic measuring and monitoring relay CM-WDS

Cycle monitor with watchdog function

The CM-WDS is designed for the external monitoring of the correct function of programmable logic controllers (plc) and industrial pcs (ipc).



2SDC 251 002 F0004

Features

- Cycle monitor for monitoring the function of programmable logic controllers or industrial pcs
- 4 selectable cycle monitoring time ranges from 0.5 to 1000 ms
- 24 V DC supply
- 1 c/o contact
- 2 LEDs for status indication

Approvals



UL 508, CAN/CSA C22.2 No.14



RMRS

Marks




CE

Order data

Type	Rated control supply voltage	Order code
CM-WDS	24 V DC	1SVR 430 896 R0000

Functions

Operating controls

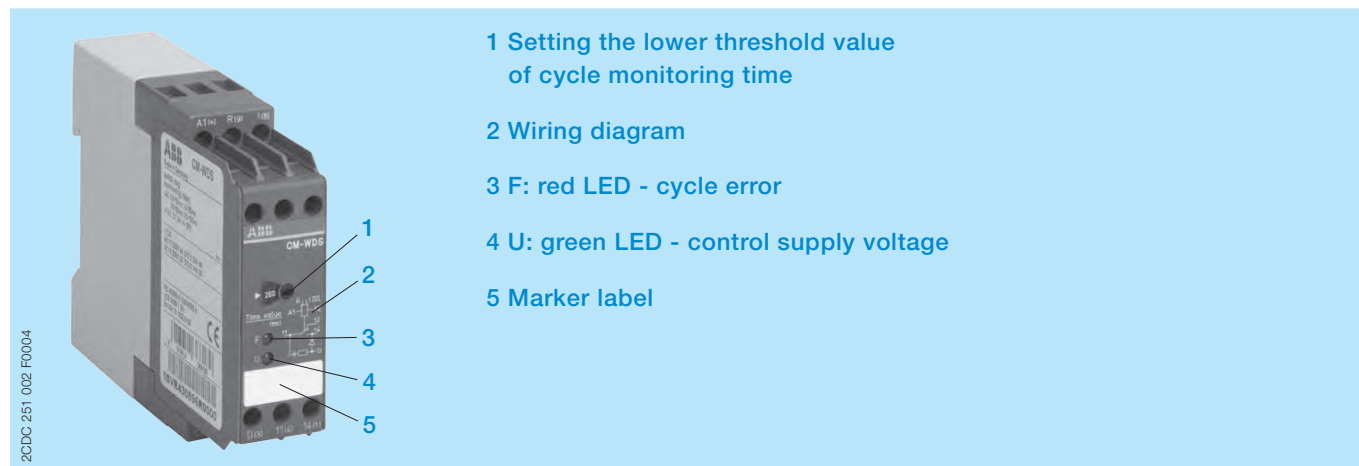

Application

The CM-WDS is designed for the external monitoring of the correct function of programmable logic controllers (plc) and industrial pcs (ipc). See "Example of application - Circuit diagram" on page 3.

Operating mode


The cycle monitor CM-WDS (watchdog) observes if a regularly intermittent pulse is applied to its pulse input "I". It is, for example, possible to connect the output of a programmable logic controller (plc), which is set and reset regularly (e. g. once each cycle). The connected cycle pulse must be generated by suitable programming of the plc/ipc. Now, the CM-WDS monitors if the cycle time of the plc/ipc program is smaller than the cycle monitoring time set by means of the front-face selector switch "time value (ms)".

The output relay 11-12/14 of the CM-WDS energizes and the red LED is switched off, if there are minimum 8 successive regular pulses on input "I". When the pulse signal stays out or is not regular, the output relay de-energizes and the red LED is illuminated.

In case the monitoring time is too short or too long, this can be adjusted by a modified programming of the plc/ips or by modified setting of the monitoring time "time value (ms)".


A malfunction recognized and stored with the CM-WDS can be reset with an H-impulse (0-1-transition) on the reset input "R(9)", so that the cycle monitoring is again released. The reset impulse can be generated by means of a reset button or by suitable programming of the controller (plc/ipc).

Function diagrams

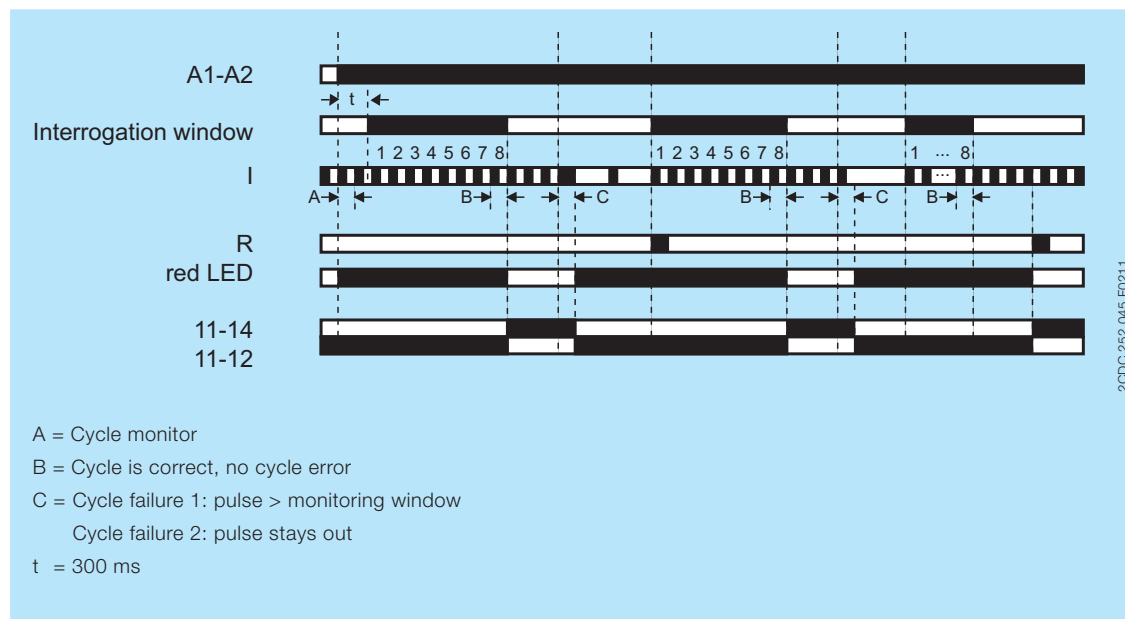


Connection and wiring

Position of connection terminals

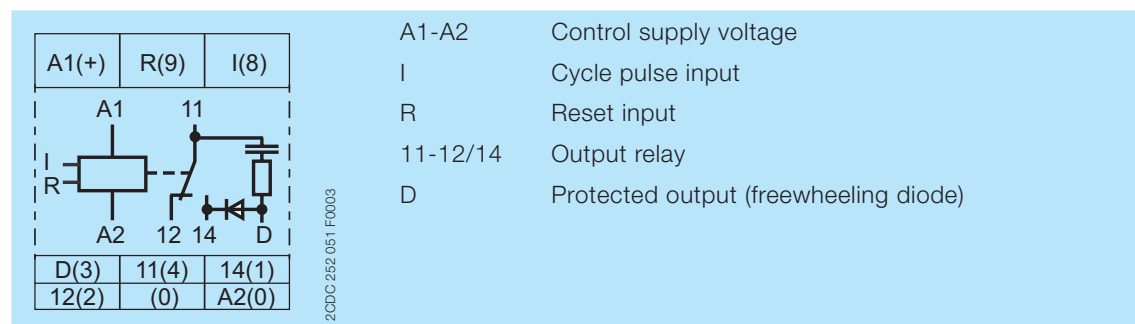

Example of application - Circuit diagram

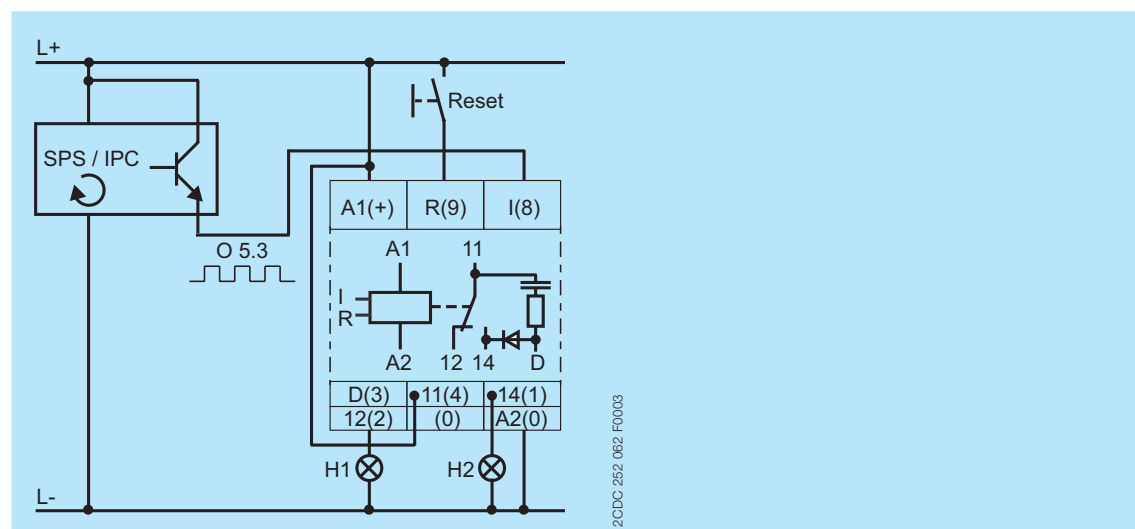

Technical data

Input circuit - Supply circuit		A1-A2
Rated control supply voltage U_S - power consumption	A1-A2	24 V DC - approx. 1 W
Rated control supply voltage tolerance		-30...+30 %
Duty time		100 %

Input circuit - Measuring circuit		I
Monitoring function		cycle monitoring
Input voltage		24 V DC
Input current		approx. 5 mA
Setting range of cycle monitoring time		0.5-150 ms
		0.5-260 ms
		0.5-500 ms
		0.5-1000 ms
Cycle duration of one pulse		approx. 0.5-1000 ms
Measuring cycle at switching ON		2.2-10 s
Accuracy within the rated control supply voltage tolerance		≤ 0.5 %
Accuracy within the temperature range		≤ 0.06 % / °C

Timing circuit		
ON-delay time		approx. 2.2-10 s


Indication of operating states		
Control supply voltage		U: green LED
Cycle error	output relay de-energized	F: red LED
Output circuits		
		11-12/14
Kind of output		Relay: 1 c/o contact
Operating principle	output relay de-energizes in case of cycle error	closed-circuit principle
Contact material		AgCdo
Rated voltage	VDE 0110, IEC 60947-1	250 V
Min. switching voltage / min. switching current		- / -
Max. switching voltage		250 V AC, 250 V DC
Rated operational current I _o (IEC/EN 60947-5-1)	AC12 (resistive) at 230 V	4 A
	AC15 (inductive) at 230 V	3 A
	DC12 (resistive) at 24 V	4 A
	DC13 (inductive) at 24 V	2 A
Mechanical lifetime		10 x 10 ⁶ switching cycles
Electrical lifetime	AC12, 230 V, 4 A	0.1 x 10 ⁶ switching cycles
Max. fuse rating to achieve short-circuit protection	n/c contact	10 A fast-acting class gL
	n/o contact	10 A fast-acting class gL
General data		
Dimensions (W x H x D)		22.5 x 78 x 100 mm (0.89 x 3.07 x 3.94 in)
Mounting		DIN rail (IEC/EN 60715)
Mounting position		any
Degree of protection	enclosure / terminals	IP50 / IP20
Electrical connection		
Wire size	fine-strand with wire end ferrule	2 x 2.5 mm ² (2 x 14 AWG)
Environmental data		
Ambient temperature ranges	operation	-20...+60 °C
	storage	-40...+85 °C
Operational reliability	IEC/EN 60068-2-6	4 g
Mechanical shock resistance	IEC/EN 60068-2-6	6 g
Environmental tests	IEC/EN 60068-2-30	24 h cycle, 55 °C, 93 % rel., 96 h
Isolation data		
Rated insulation voltage between all isolated circuits (VDE 0110-1, IEC/EN 60947-1)		250 V
Rated impulse withstand voltage U _{imp} between all isolated circuits (VDE 0110-1, IEC 664)		4 kV / 1.2-50 µs
Test voltage between all isolated circuits, routine test (IEC/EN 60255-5, IEC/EN 61010-1)		2.5 kV, 50 Hz, 1 min
Pollution degree (VDE 0110, IEC 664, IEC 255-5)		3 / C
Overvoltage category (VDE 0110, IEC 664, IEC 255-5)		III
Standards / directives		
Product standard		IEC/EN 60255-6
Low Voltage Directive		2006/95/EC
EMC Directive		2004/108/EC

Electromagnetic compatibility


Interference immunity to	IEC/EN 61000-6-2	
electrostatic discharge	IEC/EN 61000-4-2	Level 3, 6 kV / 8 kV
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3, 10 V/m
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3, 2 kV / 5 kHz
surge	IEC/EN 61000-4-5	Level 3, 2 kV L-L
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3, 10 V
Interference emission	IEC/EN 61000-6-4	

Technical diagrams


Load limit curves

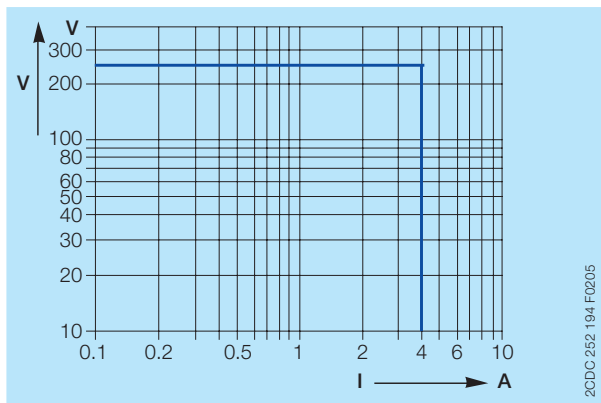


AC load (resistive)

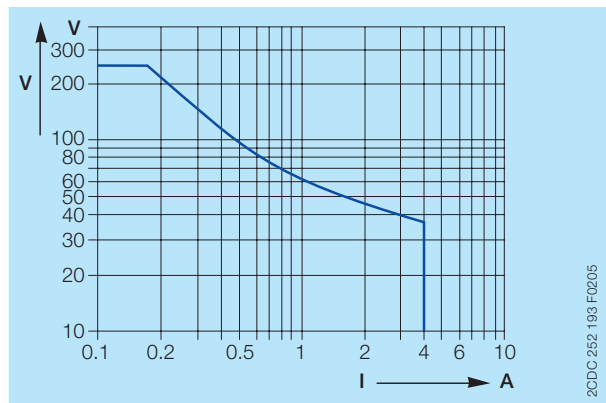

DC load (resistive)

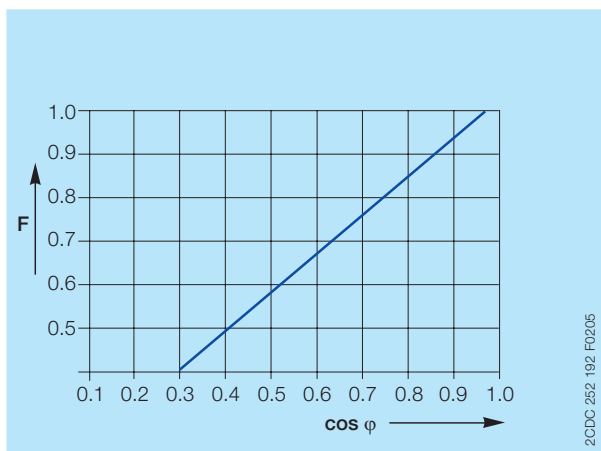


Reduction factor F for inductive AC load

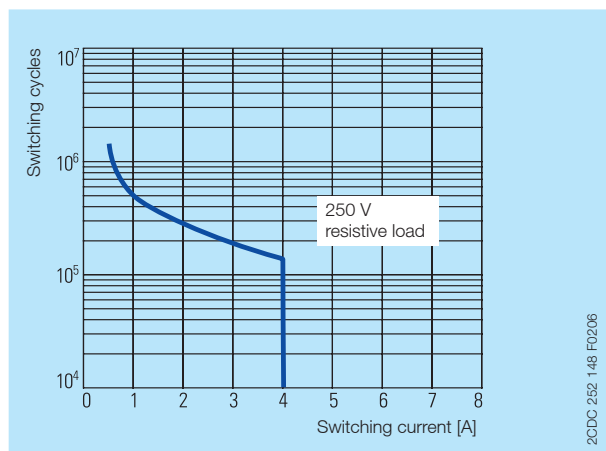

Contact life time / number of operations N
220 V 50 Hz 1 AC, 360 operations/h

Dimensions

in mm and inches

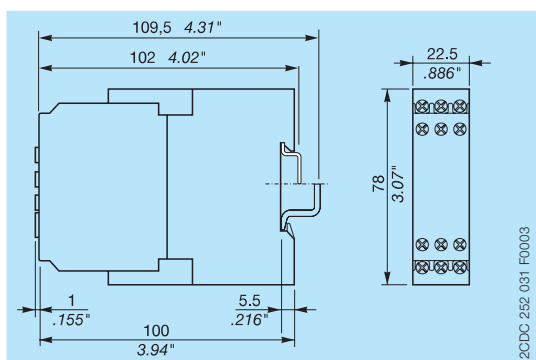

Contact us

ABB STOTZ-KONTAKT GmbH

P. O. Box 10 16 80
69006 Heidelberg, Germany
Phone: +49 (0) 6221 7 01-0
Fax: +49 (0) 6221 7 01-13 25
E-mail: info.desto@de.abb.com

You can find the address of your
local sales organisation on the
ABB home page
<http://www.abb.com/contacts>
-> Low Voltage Products and Systems

Note:

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright© 2010 ABB
All rights reserved