



## Model NV-ER1816i TBus™ Sixteen Port Receiver Hub



### Features:

- Transmit 10/100 BaseT Full Duplex Ethernet up to 8,000ft over RG-59/U, 2,000ft over 2-wire/UTP or 1,300ft over Shielded Twisted Pair\*
- The TBus architecture allows multipoint operation in any star or daisy-chained topology, with any combination of wire types, and up to 64 remote transmitters/IP cameras
- Transparently supports all networking protocols (UDP, TCP/IP, HTTP, Multicast etc.) using advanced 128-bit AES encryption
- Dual 10/100/1000 uplink ethernet connectivity
- Easy configuration, no PC required
- 56 VDC is distributed over the TBus to all connected equipment. PoE, PoE+, or High Power PoE cameras (or other PoE devices), up to 50 watts\* are supported.

The NVT Model NV-ER1816i TBus Ethernet over Coax/UTP Receiver Hub is a 1U 19" rack mountable bus-architected media switch that has 16 TBus ports, capable of supporting up to 64 TBus transmitters and their subsequent 10/100 BaseT Ethernet and PoE+ powered devices\*.

The TBus transmission medium can be coax, 2-wire/UTP, or Shielded Twisted-Pair. Data rates up to 200 Mbps are achievable, making this device the ideal choice in new or legacy installations where existing cable is re-deployed as part of an upgrade to IP cameras. An internal 250 watt 56 VDC power supply can be optionally augmented by an external 250 watt auxiliary power supply, supporting redundancy and/or higher power applications.

The NV-ER1816i is backed by NVT's award winning customer support, limited lifetime warranty, and advance replacement.

No IP or MAC addressing configuration is required, yet is available for browser-based monitoring and control. This provides exceptional yet simple configuration and diagnostics for the installer or remote monitoring facility.

Status LEDs indicate power, auxiliary power, and link connectivity/activity.

\*Distance and number of devices supported may lower due to limited power supply capacity and wire voltage-drop, or data-rate limiting due to the selected wire's high-frequency signal attenuation. See manual or IP Distance Calculator at [nvt.com](http://nvt.com).

### Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA  
(+1) 650.462.8100 • FAX (+1) 650.326.1940  
[nvt.com](http://nvt.com) • [www.nvt.com/email](mailto:www.nvt.com/email)



# Model NV-ER1816i TBus™ Sixteen Port Receiver Hub

## Technical Specifications

### TBUS BUILDING WIRING INTERFACE

Number of Ports:	Sixteen TBus Interfaces
	Supports multiple * remote TBus Transmitters including the NV-ET1801 and the NV-ET1804
Data Rate:	Up to 200Mbps combined network speed
Impedance:	25 to 100 $\Omega$
Distance:	See pages 4 and 5
Transmission technology:	OFDM, 128-bit AES encryption

### UPLINK INTERFACES

Connectivity:	RJ45 10/100/1000 BaseT, Auto-crossover SFP Slot for optional second gigabit port
---------------	---

### \*IMPORTANT NOTE:

Data rate, distance and number of devices supported may lower due to power supply capacity, wire voltage-drop or signal attenuation. See Wire Distance Charts on pages 4 and 5. For fault/safety, never use more than two power supplies within one TBus network.

### LED STATUS INDICATORS

Power:	Blue "Power On" Flashes when joining
BNC/ 2-Wire Interface:	Green "Link" Green/Amber "Quality"
RJ45 Interface:	Green "Link" Blinks with Data

### MECHANICAL

Dimensions exclude brackets and connectors	
Dimensions:	17 in wide x 1.7 in high x 10.5 in deep 43 cm wide x 4.5 cm high x 26.7 cm deep
Weight:	7.9 lbs (3,58 Kg)

### ENVIRONMENTAL

Operating temperature:	-22°F to 122°F (-30°C to +50°C) 20 to 85% RH non-condensing
Storage temperature:	-40°F to 185°F (-40°C to +85°C) 0 to 95% RH non-condensing

Transient Immunity:	5x20 $\mu$ S 3000A, 6000V ESD 20KV, 200pF
---------------------	--

### POWER SUPPLY

Power is provided from an internal 250 Watt power supply, which can be optionally augmented by an external 250 watt auxiliary power supply. This architecture supports redundancy and/or higher power applications.

IEC 380 power inlet:	115/230VAC 50/60 Hz 1 amp 250 watts 425 BTU / hour
----------------------	---

Protection:	5x20mm type T fuse 2 amps 250V
-------------	--------------------------------

Total system consumption:	+ total consumption of PDs (IP cameras) = total consumption of remote transceivers + total power dissipated in the wire + consumption of the NV-ER-1816i=20W
---------------------------	---

### ACCESSORIES (included)

Mounting:	Rackmount "L" brackets for front, rear, or wall installations
Power cord:	Molded IEC power inlet cord 7 ft (200 cm)

### REGULATORY



UL Listed to IEC/UL 60950-1 Complies with FCC part 15B limits

Specifications subject to change without notice.

## Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA  
(+1) 650.462.8100 • FAX (+1) 650.326.1940  
nvt.com • www.nvt.com/email



## Model NV-ER1816i TBus™ Sixteen Port Receiver Hub

### Browser-Based Monitor and Control Tools

The NV-ER1816i contains an http server allowing secure communication with a web browser.

This allows for:

- Control & monitoring functions
- Joining function
- Password write access (in conjunction with the Joining pushbutton)
- Reading of per-channel and overall current draw
- Power-cycle reset of any channel
- Download of firmware upgrades
- Remote diagnostics

### Accessories

NV-BNCT: BNC "T" adaptor



NV-EC4BNC: 1:4 BNC splitter adaptor



NV-PC4PR: RJ45 Patch Cord, 4-pair 3' (1m) Grey



NV-PS56-250W: Auxiliary Power Supply



FRONT

BACK

### Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA  
(+1) 650.462.8100 • FAX (+1) 650.326.1940  
nvt.com • [www.nvt.com/email](http://www.nvt.com/email)






## Model NV-ER1816i TBus™ Sixteen Port Receiver Hub

### Wire Type and Data Distance Capacity

In addition to the power distance limitation, maximum data throughput is limited by wire quality. The graph below will help you determine your data throughput.

A Distance Calculator can be found at [www.nvt.com](http://www.nvt.com).

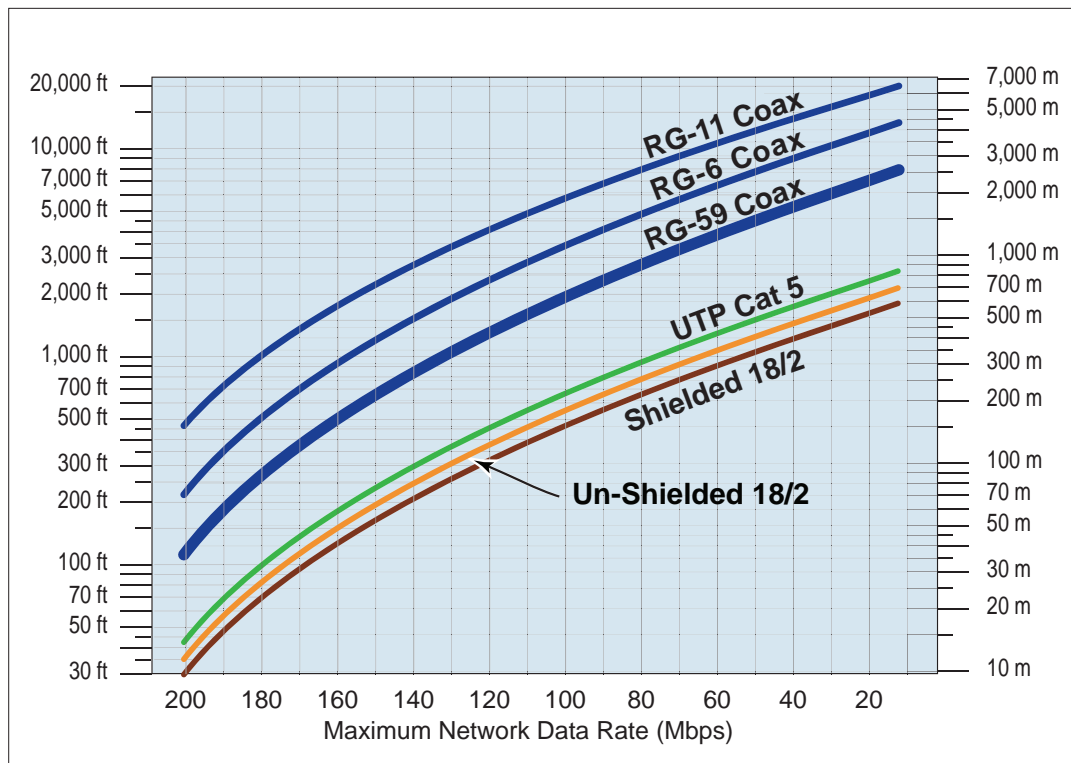

### Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA  
(+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940  
[nvt.com](http://nvt.com) • [info@nvt.com](mailto:info@nvt.com)