


Vicon in-dome transmitter and receiver with 10-bit digitally encoded video with Vicoax "Up-the-Coax" or bi-directional data (RS232, RS422, RS485 2/4W)



VICOAX™



FVR109A1Vicon
Receiver

FVT109A1Vicon
In Dome Transmitter

Description

The ComNet™ FVT/FVR109A1Vicon are a video transmitter/receiver and data transceiver series that supports the simultaneous transmission of short haul quality 10-bit EIA RS-250C digitally encoded video and bi-directional data over one multimode or single mode optical fiber. The FVT109A1Vicon is designed to be internally mounted in and powered by the Vicon Dome camera. It supports Vicon Vicoax™ "up-the-coax" data transmission, achieving distances of 600m and bi-directional serial camera control. Packaged in the exclusive ComNet ComFit housing, the full-size receiver units may be either wall or rack-mounted, or may be DIN-rail mounted by the addition of ComNet model DINBKT1 adaptor plate.

Features

- Supports Vicon Vicoax™ up-the-coax systems
- 10-bit digitally encoded video
- 1 bi-directional data channel
- Distances up to 30 miles (48 km)
- Exceeds all requirements for RS-250C short-haul transmission: True broadcast 10-bit digitally encoded video performance
- Vicoax distance to 600m (2000 ft)
- Compatible with all NTSC, PAL, or SECAM CCTV camera systems
- Tested and certified by an independent laboratory for full compliance with the environmental requirements (ambient operating temperature, mechanical shock, vibration, humidity with condensation, high-line/low-line voltage conditions and transient voltage protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.
- Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
- Automatic resettable fuses on all power lines
- Bi-color (Red/Green) LED status indicators provide rapid indication of critical operating parameters
- FVR109A(M)(S)1Vicon is a hot-swappable rack module
- FVR109A(M)(S)1Vicon is interchangeable between stand-alone or rack mount use - ComFit
- Lifetime Warranty

Applications

- High-Performance CCTV with PTZ Control

specifications

VIDEO

Video Input:	1 volt pk-pk (75 ohms)
Overload:	>1.5V pk-pk
Bandwidth:	5 Hz - 10 MHz
Differential Gain:	<2%
Differential Phase:	<0.7°
Tilt:	<1%
Signal-to-Noise Ratio (SNR):	67 dB @ Maximum Optical Loss Budget
Max. RG-59 COAX Distance:	100m (300ft) Camera to Fiber Optic Module to maintain 10Mhz Bandwidth

DATA

Data Interface:	RS232, RS422 and RS485 (2W/4W), UTC (Up-the-Coax)
-----------------	---

Data Rate:	DC-250 Kbps (NRZ)
WAVELENGTH	1310/1550 nm, MM and SM

NUMBER OF FIBERS

OPTICAL EMITTER

LED INDICATORS

CONNECTORS

Optical:	1 ST connector
Power:	Terminal Block
Video:	BNC (Gold Plated Center-Pin)
Data:	Terminal Block

ELECTRICAL & MECHANICAL (FVR109A Receiver)

Power:	
Surface Mount:	8-15 VDC @ 350 mA
Rack Mount:	From Rack
Rack Slots:	1
Current Protection:	Automatic Resettable Solid-State Current Limiters
Circuit Board:	Meets IPC Standard
Size (in./cm) (L×W×H)	6.1 × 5.3 × 1.1 in., (15.5 × 13.5 × 2.8 cm)
Shipping Weight:	<2 lb./0.9 kg
ENVIRONMENTAL	
MTBF:	>100,000 hours
Operating Temp:	-40° C to +75° C
Storage Temp:	-40° C to +85° C
Relative Humidity:	0% to 95% (non-condensing)*
* May be extended to condensation conditions by adding suffix '/C' to model number for conformal coating.	


MADE IN THE
USA

PART NUMBER	DESCRIPTION	FIBERS REQ'D	FIBER	OPTICAL PWR BUDGET	MAX. DISTANCE [†]	# RACK SLOTS
FVT109AM1Vicon	Mini Video Transmitter/Data Transceiver	1	Multimode 62.5/125µm	16 dB	3 km (2 mi)	(in-dome)
FVR109AM1Vicon	Video Receiver/Data Transceiver					1
FVT109AS1Vicon	Mini Video Transmitter/Data Transceiver	1	Single Mode 9/125µm	16 dB	48 km (30 mi)	(in-dome)
FVR109AS1Vicon	Video Receiver/Data Transceiver					1
Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included with FVR109AVicon receiver)					
Options	Add 'C' for Conformally Coated Circuit Boards (Extra charge, consult factory)					
	DIN-Rail Mounting Adaptor Plate Kit - With mounting hardware (Optional, order DINBKT1) - compatible only with FVR109AVicon receiver					

NOTE: This product requires a fiber installation with a minimum 35 dB connector return loss. The use of Super Polish Connectors is recommended. Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J.

In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

[†]Distance may be limited by optical dispersion.

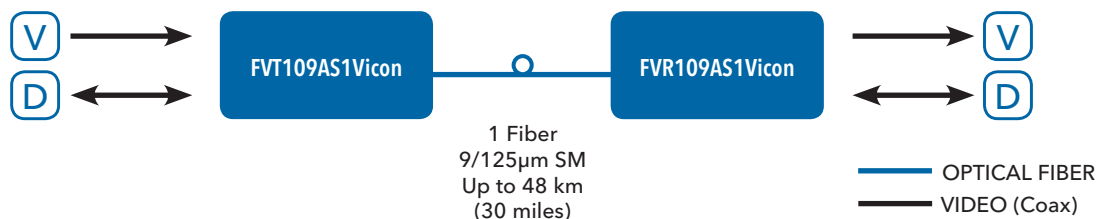

comnet
Communication Networks

3 CORPORATE DRIVE | DANBURY, CT 06810 | USA
T: 203.796.5300 | F: 203.796.5303 | TECH SUPPORT: 1.888.678.9427 | INFO@COMNET.NET

8 TURNBERRY PARK ROAD | GILDERSOME | MORLEY | LEEDS, UK LS27 7LE
T: +44 (0)113 307 6400 | F: +44 (0)113 253 7462 | INFO-EUROPE@COMNET.NET

© 2012 Communications Networks Corporation. All Rights Reserved. "ComNet" and the "ComNet Logo" are registered trademarks of Communication Networks, LLC.

01.19.12