



Above Ceiling Mount for PEAR S4935i, S5491i, M4969i


Above Ceiling Installation

DESCRIPTION:

Galtronics' above ceiling mount offers an easy installation solution to mount Galtronics' PEAR S4935i, S5491i, M4969i antennas above ceilings. Mounting hardware is not included. Make sure the selected fasteners are appropriate based on the ceiling material to which the above ceiling mount is attached to.

Specifications


Environmental Conditions	Indoor
Weight	0.34 lbs (155 g)
Diameter	12.5" (320mm)
Height	2.28" (58mm)
Above Ceiling Mount Color	White
Above Ceiling Material	PC/ABS
Mounting Hardware	Not included
Clearance above ceiling needed	9.13" (232mm)
Approved for Installation in Plenum Space	tested by Intertek/ETL

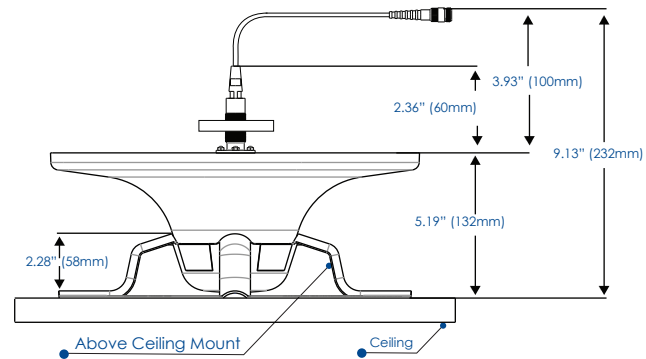

Assembly Instructions for the S4935i, S5491i, M4969i Above Ceiling Mount:

Step 1: Attach the antenna to the above ceiling mount

- Use alcohol to clean the top of the antenna radome.
- Remove the protective film from the double sided tape strips located inside the center of the plastic support.
- Insert the antenna radome into the plastic support and press together firmly.

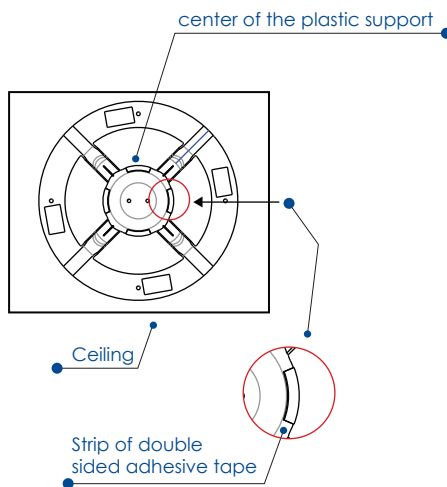

Step 2: Attach the antenna assembly to the ceiling

Place the above ceiling mount with the antenna above the ceiling and use either option:

- Option 1:** Use four head screws $\frac{8}{32}$ " (6mm) diameter suitable for the ceiling material (not provided).
- Option 2:** Remove the protective film on the adhesive strips located at the bottom of the plastic support and firmly press on to the ceiling.

