

stand-alone network interface device

SSDTFx0xx-12x

T1/E1

Remotely Managed T1/E1 NID (Network Interface Device)


Features

- ▶ Remote unit in-band management
- ▶ Local or Remote Loopbacks on copper or fiber in software mode
- ▶ Loopbacks via test set
- ▶ Converts the copper ports on T1/E1 devices, such as a PBX or T1/E1 Router, to multimode or single mode fiber
- ▶ Switch selectable RJ-48 connectors for T1 or E1
- ▶ Jitter attenuators optimize Bit Error Rate (BER) performance
- ▶ Network debug procedures make BER testing more convenient
- ▶ Built-in troubleshooting with the addition of a selectable TAOS (Transmit All Ones) switch on the fiber and copper interfaces allows the network engineer to test all T1/E1 equipment on that network segment and ensure the network link
- ▶ Dry Relay Contacts enable the device to be tied into a separate alarm circuit commonly found in a T1/E1 twisted pair environment. Contacts will be activated on loss of power or loss of fiber link.
- ▶ LED provides Alarm Indication Signal (AIS)
- ▶ Can be used with fractional T1/E1 circuits
- ▶ Report converter status
 - Copper & Fiber Link status
 - Hardware switch settings: LBO, AIS Copper, AIS Fiber, HW/SW
 - AIS detected Copper & Fiber
 - Model Number
 - Copper & Fiber Connector
- ▶ Remote commands:
 - Loopback Copper & Fiber
 - AIS transmitted on Fiber on loss of Copper link
 - AIS Transmitted on Copper on loss of Fiber link
- ▶ Extend PRI over fiber



- ▶ Remote management in a stand-alone device When used in conjunction with a managed Point System™ chassis, this stand-alone unit can be managed remotely.
- ▶ The Remotely Managed T1/E1 copper to fiber media converter will provide a solution for users who desire to extend their T1/E1 or PRI circuits over fiber and remotely manage them “in-band” from admin locations.

Provide Campus Interconnects

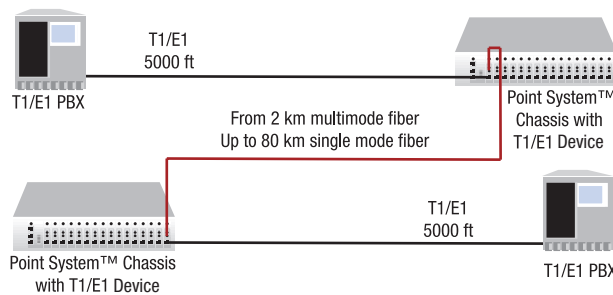

Specifications

Standards	ITU-T, ANSI, AT&T, ETSI
3-position Jumper	Hardware: mode is determined by 4-position switch settings Software: mode is determined by most recently saved on-board microprocessor settings.
Status LEDs	PWR (Power): Steady green LED indicates connection to external AC power SDC (Signal Detect/Copper): On indicates twisted pair link is up SDF (Signal Detect/Fiber): On indicates fiber link is up
Dimensions	Width: 3.25" [82 mm] Depth: 4.8" [122 mm] Height: 1.0" [25 mm]
Power	External AC/DC provided; 12V DC; 0.5A; unregulated; standard; UL listed
Environment	0 – 50°C, 5% – 95% humidity (non-condensing), 0 – 10,000 ft.
Shipping Weight	2 lbs. [0.90 kg]
Safety Compliance	Wall Mount Power Supply: CSA certified
Regulatory Compliance	CISPR/EN55022 Class A; FCC Class A; CE Mark
Warranty	Lifetime

Devices must be used in pairs. Typically installation will include a chassis card [CSDTF, pg 59] installed in the Point System™ locally and a stand-alone device installed at the remote location.

Ordering Information

- SSDTF1011-120**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 850nm multimode (ST)
[2 km/1.2 mi.] Link Budget: 13.5 dB
- SSDTF1013-120**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 850nm multimode (SC)
[2 km/1.2 mi.] Link Budget: 13.5 dB
- SSDTF1027-120**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1300nm multimode (ST)
[5 km/3.1 mi.] Link Budget: 13.5 dB
- SSDTF1012-120**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1310nm single mode (ST)
[8 km/5 mi.] Link Budget: 7.0 dB
- SSDTF1022-120**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1310nm single mode (ST)
[15 km/9.3 mi.] Link Budget: 10.0 dB
- SSDTF1014-120**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1310nm single mode (SC)
[30 km/12.4 mi.] Link Budget: 16.0 dB
- SSDTF1015-120**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1310nm single mode (SC)
[40 km/24.9 mi.] Link Budget: 30.0 dB
- SSDTF1016-120**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1310nm single mode (SC)
[60 km/37.3 mi.] Link Budget: 33.0 dB
- SSDTF1017-120**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1550nm single mode (SC)
[80 km/49.7 mi.] Link Budget: 29.0 dB
- Single Fiber Products**
- SSDTF1029-120**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1310nm TX /1550nm RX single fiber SM (SC)
[20 km/12.4 mi.] Link Budget: 19.0 dB
- SSDTF1029-121**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1550nm TX/1310nm RX single fiber SM (SC)
[20 km/12.4 mi.] Link Budget: 19.0 dB
- SSDTF1029-122**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1310nm TX/1550nm RX single fiber SM (SC)
[40 km/24.9 mi.] Link Budget: 25.0 dB
- SSDTF1029-123**
Twisted Pair (RJ-48) [1.5 km/0.9 mi.] to 1550nm TX/1310nm RX single fiber SM (SC)
[40 km/24.9 mi.] Link Budget: 25.0 dB

Optional Accessories (sold separately)

Wide Input (18 – 72 VDC) Power Supplies

SPS-24602-PS
Piggy Back Power Supply

SPS-2460-SA
Stand-Alone Power Supply

Mounting Options

E-MCR-05
12-Slot Media Converter Rack

RMS19-SA4-01
4-Slot Media Converter Shelf

WMBD
DIN Rail Bracket 5.0" [127 mm]

WMBD-F
DIN Rail Bracket (flat) 3.3" [84 mm]

WMBL
Wall Mount Bracket 4.0" [102 mm]

WMBV
Vertical Wall Mount Bracket 5.0" [127 mm]