



Quam

LOUDSPEAKER ASSEMBLIES

8C5PAX/TBL25

LOUDSPEAKER AND TRANSFORMER

8" O.D. Loudspeaker with a 5 oz. magnet
and a 4W-25V Transformer

GENERAL DESCRIPTION

The **8C5PAX/TBL25** consists of an 8C5PAX - 8" O.D. dual cone loudspeaker with a 5 oz. magnet, and a 4W-25V transformer. Loudspeaker frame is finished in black powder coat.

INTENDED USE - Indoor Environment



Program Material | Signal tones, voice, and music

AUDIO SPECIFICATIONS

| | |
|---------------------------------|--|
| Average Sensitivity | 92 dB SPL, 1W/ 1M |
| Loudspeaker Power Rating | 12W RMS, EIA 426A Standard |
| Maximum Power Rating | 15W @ 8 Ohms |
| Calculated Output | 98 dB SPL, 4W/ 1M |
| Magnet Type & Weight | BeFe Ceramic, 5 oz. Nominal |
| Frequency Response | 65 Hz - 17 kHz EIA 426A Standard |
| Nominal Coverage Angle | 100° Included Angle, -6 dB / 2 kHz, Half space |
| Audio Connection | 7" Color-Coded Leads |
| Wattage Taps | 0.25W, 0.50W, 1W, 2W, 4W |

RECOMMENDED QUAM COMPONENTS

| | |
|----------------|--|
| Baffles | <i>Round</i> : BR8-2WS, BR8B, BR8VP, BR8W, BR8WS <i>Square</i> : BS8VP, BS8VPS, BS8W, BS8WS |
|----------------|--|

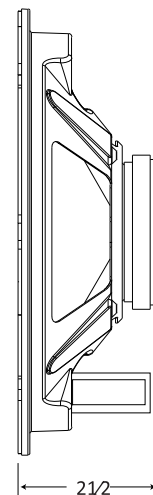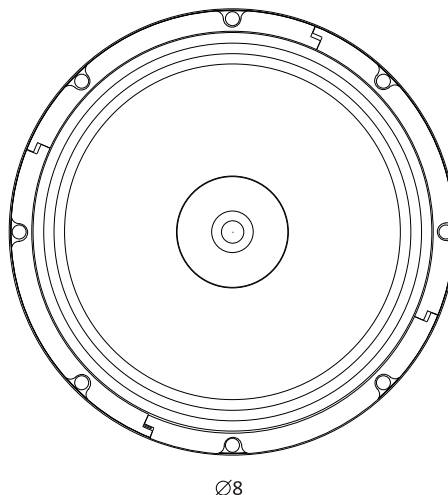

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the QUAM Architects' and Engineers' Resources section on the web at:
www.QuamSpeakers.com

© 2013 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.



QUAM-NICHOLS COMPANY, INC.
234 East Marquette Rd.
Chicago, IL. 60637
Tel: 1-800-NEED-NOW (800-633-3669)
Fax: 1-888-NEED-NOW (888-633-3669)
e-mail: NeedNow@QNC.com
www.QuamSpeakers.com