



# Quam

## LOUDSPEAKER ASSEMBLIES

### C5/B25/W

#### CEILING MOUNTED

8" O.D. Loudspeaker with a 5 oz. magnet,  
4W-25V Transformer, Screw-Mount Baffle

#### GENERAL DESCRIPTION

The **C5/B25/W** consists of an 8C5PAX - 8" O.D. dual cone loudspeaker with a 5 oz. magnet, TBL25 - 4W-25V transformer, and a BR8W - round, screw-mount baffle in a white powder coat finish.

#### INTENDED USE - Indoor Environment


Program Material	Signal tones, voice, and music
------------------	--------------------------------

#### AUDIO SPECIFICATIONS

Average Sensitivity	92 dB SPL, 1W/ 1M
Loudspeaker Power Rating	12W RMS, EIA 426A Standard
Maximum Power Rating	15W @ 8 Ohms
Calculated Output	98 dB SPL, 4W/ 1M
Magnet Type & Weight	BeFe Ceramic, 5 oz. Nominal
Frequency Response	65 Hz - 17 kHz EIA 426A Standard
Nominal Coverage Angle	100° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection	7" Color-Coded Leads
Wattage Taps	0.25W, 0.50W, 1W, 2W, 4W

#### RECOMMENDED QUAM COMPONENTS

Enclosures	ERD-8, ERD8U
Mounting Device	SSB-2, SSB-3, SSB-7

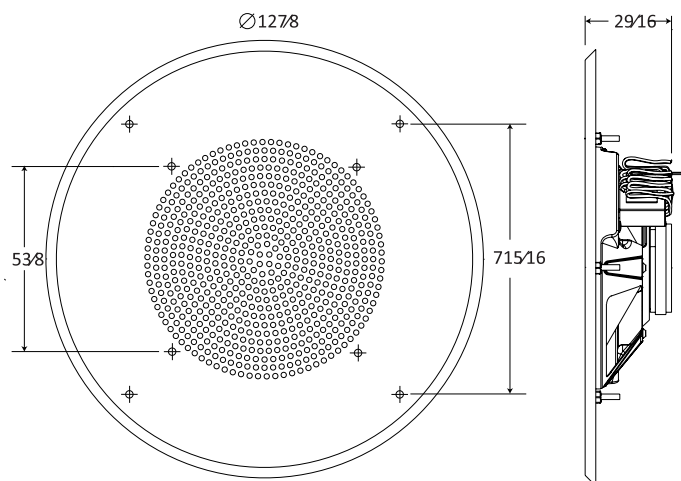

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the QUAM Architects' and Engineers' Resources section on the web at:  
[www.QuamSpeakers.com](http://www.QuamSpeakers.com)

© 2013 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.



QUAM-NICHOLS COMPANY, INC.  
234 East Marquette Rd.  
Chicago, IL. 60637  
Tel: 1-800-NEED-NOW (800-633-3669)  
Fax: 1-888-NEED-NOW (888-633-3669)  
e-mail: [NeedNow@QNC.com](mailto:NeedNow@QNC.com)  
[www.QuamSpeakers.com](http://www.QuamSpeakers.com)