



GAI-TRONICS® CORPORATION

A HUBBELL COMPANY

Access Panel Replacement Kits

Models 12510-002 and 12510-003

Confidentiality Notice

This manual is provided solely as an operational, installation, and maintenance guide and contains sensitive business and technical information that is confidential and proprietary to GAI-Tronics. GAI-Tronics retains all intellectual property and other rights in or to the information contained herein, and such information may only be used in connection with the operation of your GAI-Tronics product or system. This manual may not be disclosed in any form, in whole or in part, directly or indirectly, to any third party.

General Information

The Model 12510-002 Small Access Panel Kit and Model 12510-003 Large Access Panel Kit are needed to mount the 10458-xxx Electronics Paging Module in either the Stanchion Broadcast Assembly, or in an existing stanchion equipped with a Stanchion Broadcast Module.

The Model 12510-002 Kit contains the following:

Qty	Description
1	Small Access Panel with gasket
4	Washers, felt
4	#10-32 Screws, tamper-resistant
4	Screws, 1/4-20 × 3/4 Hex washer head (thread-cutting)

The Model 12510-003 Kit contains the following:

Qty	Description
1	Large Access Panel with gasket
6	Washers, felt
6	#10-32 Screws, tamper-resistant
4	Screws, 1/4-20 × 3/4 Hex washer head (thread-cutting)

Installation

1. Model 10458-xxx Electronics Paging Module should be attached to the access panel in accordance with the Paging Module instructions, Pub. 42004-415.
2. All interconnections should be made to the paging module from speaker kits, beacon, antenna kits, etc., before attaching Access Panel Kit to the stanchion body.
3. The Small Access Panel Kit should be attached to the stanchion body using the four #10-32 tamper-resistant screws and four felt washers provided. The Large Access Panel Kit should be attached to the stanchion body using the six #10-32 tamper-resistant screws and six felt washers provided.

4. Four $\frac{1}{4}$ -20 \times $\frac{3}{4}$ -inch hex washer head thread-cutting screws are also supplied for mounting the Stanchion Broadcast Module to the top of the stanchion. Refer to Pub. 42004-416 SBM Stanchion Installation Manual.

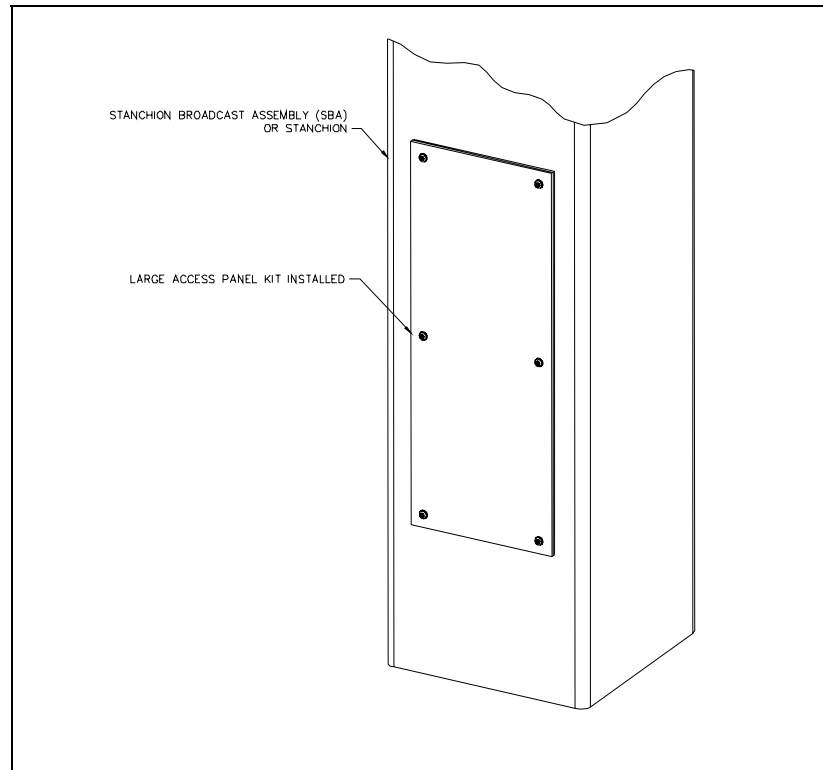


Figure 1. Typical Application of Access Panel Kit

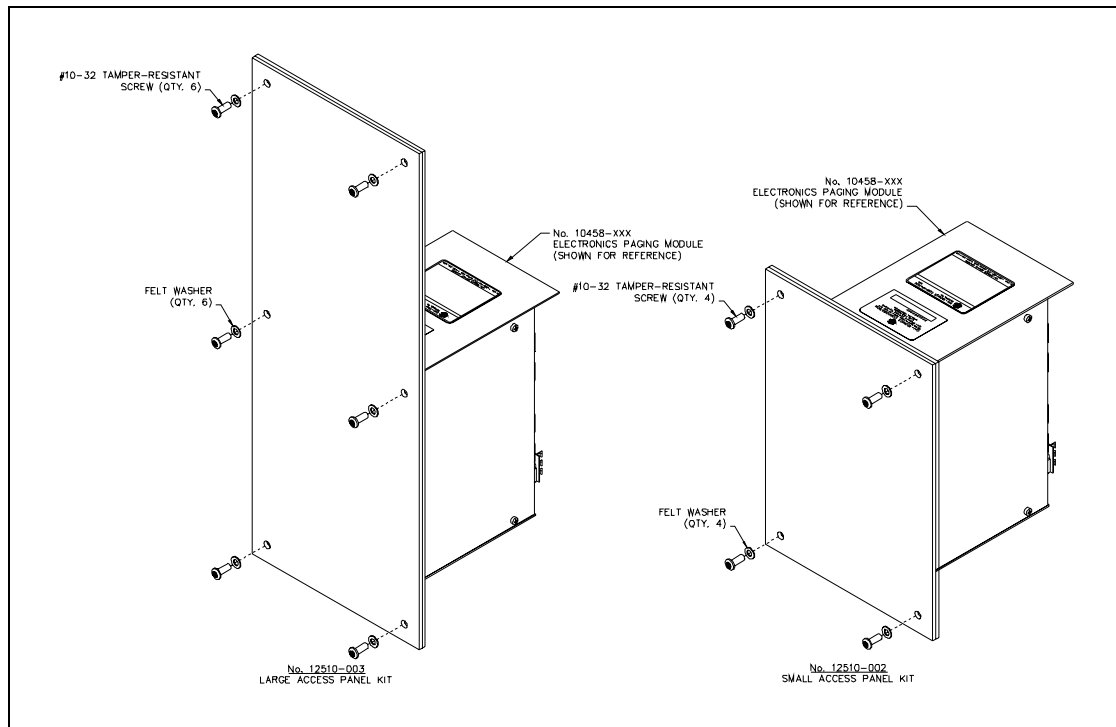


Figure 2. Exploded View of Access Panel Kits