



## GC2 Security & Home Automation Platform

Model #: 2GIG-CP21-345



### FULL VOICE RESPONSE

The panel gives clear notifications that indicate system status, zone descriptions, alarms, and emergencies.

### DATE, TIME & WEATHER DISPLAY\*

With a touch, scroll through the date, time, and daily weather forecast. Has the ability to receive messages, including severe weather warnings.

### QUICK ACCESS

The one touch access buttons allow the quickest help possible in an emergency. The panel's LED lit buttons indicate the system's status.

### USER FRIENDLY LCD TOUCH SCREEN

The easy-to-use color touch screen puts a wide range of security and home automation controls at your fingertips.

### MULTIPLE ARMING OPTIONS

Secure your home by arming your system "AWAY" or "STAY." The Quick Arm/Exit and Bypass features offer added convenience.

### HOME AUTOMATION

The built in Z-Wave radio makes it easy to add home automation conveniences including HVAC, appliance, lighting, and door/lock control.

### TWO-WAY RESPONSE OVER CELLULAR\*

Two-way voice lets central station operators listen in and talk to you when a signal is received, ensuring that the proper emergency response personnel will be dispatched if necessary.

### CONVENIENCE

The fully self-contained panel contains a backup battery, and allows 64 user codes to monitor up to 60 wireless zones plus 2 wired zones.

### OVER-THE-AIR UPDATES\*

There's no need to worry about the panel's software becoming outdated. With our Over-the-Air (OTA) function, the panel can be remotely updated with the latest software.


### REMOTE CONTROL OPTIONS\*

Always be in control by remotely managing your system from a computer or web-enabled smart phone.

\*Requires an active account with a compatible back-end service provider

### SPECIFICATIONS

- 60 wireless zones
- 2 wired zones
- Supports 8 Wireless Key Ring remotes and 4 Wireless Keypads
- Built-in Z-Wave radio
- Z-Wave Device to Device Association
- Full voice response
- Remote over-the-air (OTA) software updates\*
- 64 user codes
- Chime by zone with multiple chime settings
- UL 1610 Central-Station Burglar Alarm Compliance

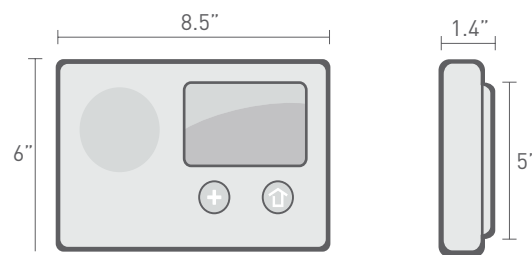

**TOUCH SCREEN DIMENSIONS:** 3.75" X 2.25"

### ELECTRICAL

#### Voltage

Panel Input 14VDC @ 1.7 A Max  
AC Adapter In 100-240 VAC~50/60 Hz @ 68 mA Max

#### Rechargeable Backup Battery

2000 mAh @ 7.2V Ni-MH battery pack (included)  
2400 mAh @ 7.2 Ni-MH battery pack (optional)

#### Alarm Sounder

85 dB at 10ft

### MODEL NUMBERS:

2GIG-CP21-345E (English)      2GIG-CP21-345C (French Canadian)  
2GIG-CP21-345E2 (English)      2GIG-CP22-345B (Brazilian Portuguese – not for US)  
2GIG-CP21-345S (Spanish)