


Net2 plus



An advanced access control unit with TCP/IP connectivity

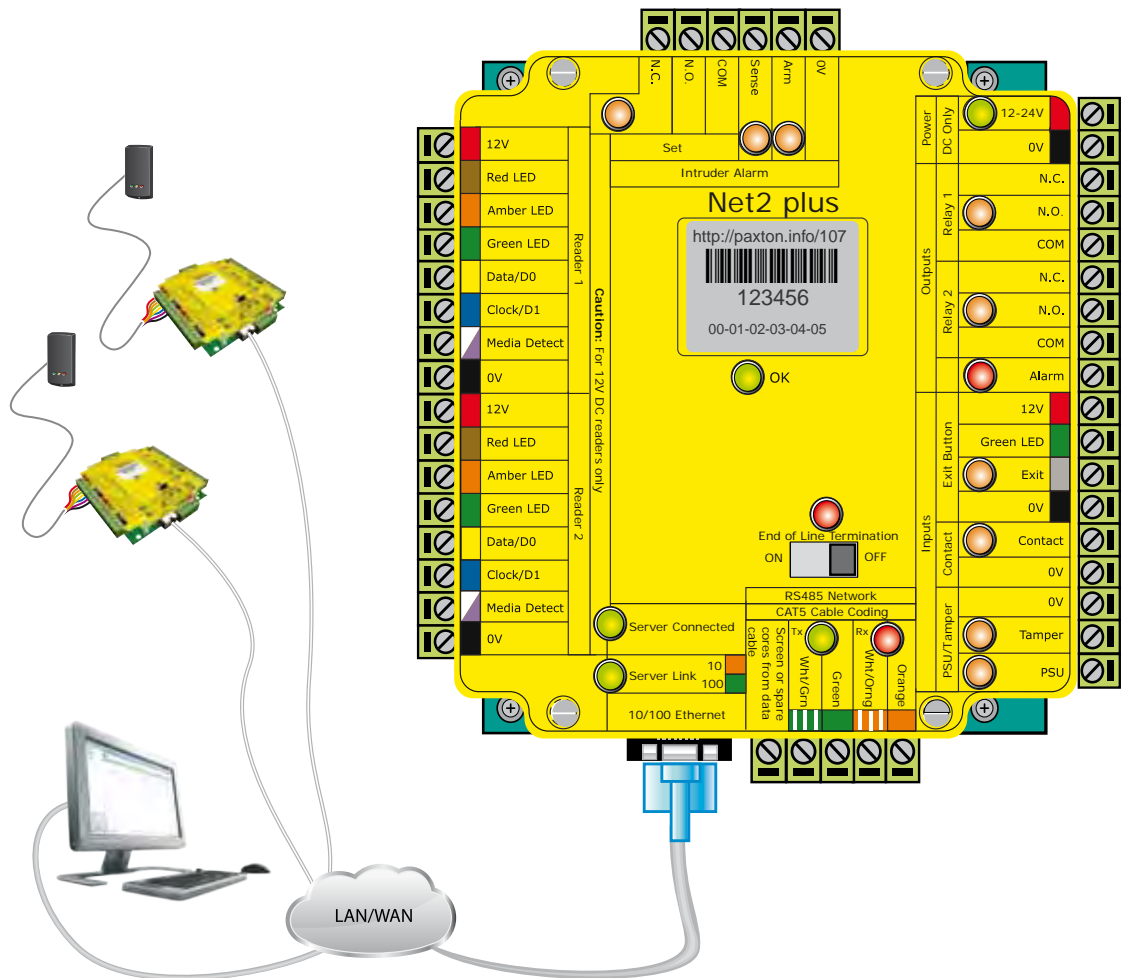

What is it?

Net2 is a PC based security system for controlling access through doors. Net2 allows users to be given access to particular areas at certain times. Because the system is networked, all administration can be done from a central point.

Net2 plus is one of three control units for the Net2 system. It is the most advanced control unit, employing the latest technology and offering huge potential for future expansion. As security technology develops, Net2 plus can take full advantage. Unlike many systems of its type Net2 plus is truly future-proof. Using Net2 plus ensures that the investment in access control is safe no matter how the system requirements change.

Net2 plus has on-board TCP/IP to allow direct connection to a computer network. This can save time, money and result in a better, more resilient system. Net2 plus control units can also be connected together using a dedicated RS485 network. This reduces the number of TCP/IP network points required for larger systems.


As with all Net2 control units, Net2 plus is designed to work seamlessly in the event of communications failure. It will continue to permit or deny access to users as appropriate. Once communications are re-established the activity is reported back to the PC.

Specifications

Features	
Doors per Access Control Unit (ACU)	1
Number of tokens/users	50,000
Number of PINs	50,000
PIN length	4 - 8 digits
Number of codes	50
Code length	4 - 8 digits
Number of time zones	64
Number of access levels	250
Stored events per ACU	2,728
Data retention during a total power loss	28 days
Hands free compatible	Yes - requires interface
3rd party readers	Yes
Clock and data	Yes
26 bit Wiegand	Yes
Custom Wiegand	Yes
Reader ports per ACU	2
Readers/Keypads per ACU	4 - check current draw on individual readers
Combined reader port output current	500 mA
Software required	Net2 v4.14 and above
Documentation	
More information	http://paxton.info/1299
Installation instructions	http://paxton.info/924
Specifications	http://paxton.info/923


Communication	
TCP/IP nodes	Max 200 (v4.25 and above)
RS485	200 ACU's per data line
Ethernet network speed	10 Mbit/s - 100 Mbit/s auto MDIX
Ethernet bandwidth requirement	200 kbit/s
DHCP support (fixed IP recommended)	Yes
RS485 network speed	115.2 kbit/s
Hardware	
Supply voltage	Min 12V DC - Max 24V DC
Supply current	200 mA
Relay switchable voltage	24V DC
Relay switchable current	4 A
Alarm output current	1 A
Operating temperature - battery limits	Min 0°C - Max +55°C
Waterproof	No - If used externally, it must be protected in a weatherproof housing
Reader cable type	Belden 9540
Data cable type	CAT5 or Belden 8723
Other hardware features	
• Volt free control relay	• Input for door contact
• Input for tamper	• Alarm output
• Input for exit button	• Dedicated intruder alarm integration port
• Input for PSU fail	• Integrated termination resistors

Net2 plus 1 door controller

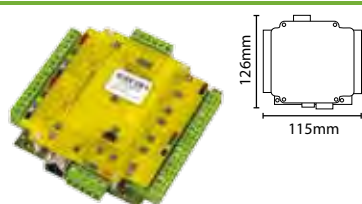

Sales code 682-493
More information <http://paxton.info/1299>

Net2 plus 1 door controller - Plastic housing

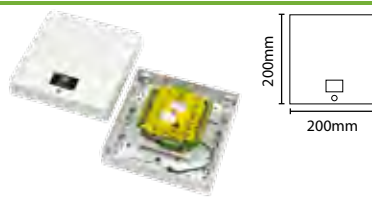

Sales code 682-528
More information <http://paxton.info/1299>

Net2 plus 1 door controller - 12V 2A PSU, Plastic cabinet



Sales code 682-531
More information <http://paxton.info/1299>

Net2 plus 1 door controller - 12V 2A PSU, Metal cabinet



Sales code 682-813
More information <http://paxton.info/1299>

Net2 plus 1 door controller - PoE+, Plastic cabinet



Sales code 682-284
More information <http://paxton.info/1299>

Net2 plus 1 door controller - PoE+, Metal cabinet



Sales code 682-721
More information <http://paxton.info/1299>

All information and specifications correct at the point of publication, but may be subject to change without notice.