

# ISM-BLP1 Blue Line PIR Detector

www.boschsecurity.com



**BOSCH**

Invented for life



- ▶ 11 m x 11 m (35 ft x 35 ft) broad coverage
- ▶ EN50131-2-2 Grade 2 compliant
- ▶ First Step Processing (FSP)
- ▶ Flexible mounting height from 2.3 m to 2.7 m (7.5 ft to 9 ft)
- ▶ No range or height adjustments required

The ISM-BLP1 Detector uses a high-density (77 zone) Fresnel lens designed to produce sharply-focused images throughout the field of view providing superior response to intruders. Easy installation and flexible mounting options provide state-of-the-art detection.

## Functions

### Signal Processing

*First Step Processing (FSP)* almost instantly responds to human targets without producing false alarms from other sources. FSP adjusts the detector's sensitivity based on signal amplitude, polarity, slope, and timing. This eliminates the need for the installer to select the sensitivity level.

### Test Features

The externally-visible alarm LED can be disabled after installation.

### Draft and Insect Immunity

The sealed optical chamber prevents drafts and insects from affecting the detector.

### Temperature Compensation

The detector adjusts its sensitivity so that it can identify human intruders at critical temperatures.

## Certifications and approvals


Australia	C-tick
Ukraine	IEC 60839-1-3-2001, IEC 60839-2-2-2001, IEC 60839-2-6-2001, GOST 26342-84, GOST 27990-88
Europe	Complies with EN50131-2-2 Grade 2

Region	Certification	
Europe	CE	2004/108/EC EMC Directive (EMC); 2006/95/EC Low-Voltage Directive (LVD) [-CCM]
	EN50131	EN 50131-1, TS 50131-2-2 August 2004, EN 50130-4, EN 50130-5
Belgium	INCERT	B-509-0009/a
	INCERT	B-509-0009/b
Russia	GOST	IEC 60839-1-3-2001, IEC 60839-2-2-2001, IEC 60839-2-6-2001, GOST 26342-84, GOST 27990-88

Region	Certification	
	GOST	GOST 12997-84, GOST R 50009-2000, GOST R 51317.3.2-99, GOST R 51317.3.3-99, GOST R MEK 60065-2002
USA	UL	ANSR: Intrusion Detection Units (UL639), ANSR7: Intrusion Detection Units Certified for Canada (cULus)
Italy	IMQ	
France	AFNOR	NF, A2P (262262-00)
Sweden	INTYG	05-132; SBSC larmklass 3, miljöklass 2


### Installation/configuration notes

#### Coverage Patterns

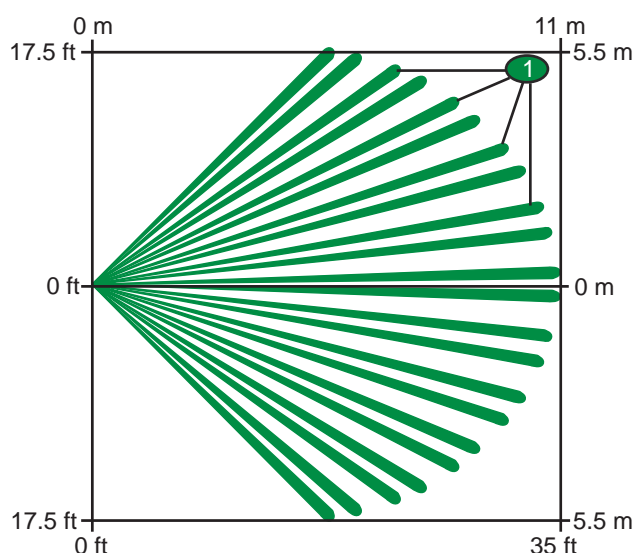

Top View Broad: 11 m x 11 m (35 ft x 35 ft)

1 PIR coverage pattern

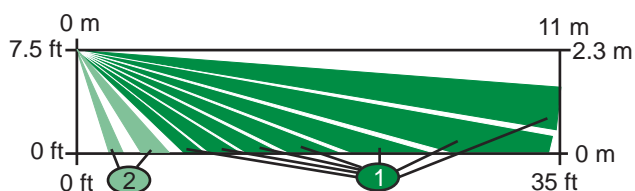

Side View Broad: 11 m x 11 m (35 ft x 35 ft)

1 PIR coverage pattern      2 Two look-down zones

#### Mounting

The recommended mounting height is 2.3 m to 2.7 m (7.5 ft to 9 ft).

The detector can be mounted:

- On a flat wall (surface, semi-flush) with the optional B335 Swivel-mount Bracket, or with the optional B328 Gimbal-mount Bracket,
- In the junction of two perpendicular walls, or

- On the ceiling with the optional B338 Ceiling-mount Bracket.



#### Notice

The use of optional mounting brackets can reduce the detector's range and increase the dead zone areas.

### Power Considerations

#### Power Limits

Input power must be provided by an Approved Limited Power Source. All outputs must be connected to SELV (safety extra-low voltage) circuits only.

#### Standby Power

This detector has no internal standby battery. *For UL Listed product installations, 4 hr (40 mAh) of standby power must be supplied by the control unit or by a UL Listed burglary power supply.*

### Parts included

Quant.	Component
1	Detector
1	Hardware pack
1	Literature pack

### Technical specifications

#### Environmental Considerations

Designed to comply with EN50131-2-2 Environmental Class II, Security Grade 2

Relative Humidity:	0 to 85%, non-condensing
Temperature (operating):	-29°C to +49°C (-20°F to +120°F) <i>For UL Listed product installations, 0°C to +49°C (+32°F to +120°F)</i>

#### Mechanical Properties

Color:	White
Dimensions:	10.7 cm x 6.1 cm x 4.8 cm (4.2 in. x 2.4 in. x 1.9 in.)
Material:	High-impact ABS plastic
Radio Frequency Interference (RFI) Immunity	No alarm or setup on critical frequencies in the range from 26 MHz to 950 MHz at field strengths less than 50 V/m.

#### Outputs

Digital Alarm:	5 V normally, grounded for 4 sec during alarm.
Relay:	Solid state, supervised, Form A normally-closed (NC) contacts rated for 125 mA, 28 VDC, 3 W.
Tamper:	Normally-closed (NC) contacts (with cover on) rated at 28 VDC, 125 mA maximum. Connect tamper circuit to 24-hour protection circuit.

## Power Requirements

Current (Alarm):	18 mA
Current (Standby):	10 mA maximum at 12 VDC
Voltage (Operating):	10 VDC to 14 VDC

## Ordering information

### ISM-BLP1 Blue Line PIR Detector

Produces sharply-focused images throughout the field of view providing superior response to intruders

Order number **ISM-BLP1**

### Accessories

#### ISM-BLA1-CC Blue Line Color Camera Module (NTSC format)

NTSC format

Order number **ISM-BLA1-CC-N**

#### ISM-BLA1-CC Blue Line Color Camera Module (PAL format)

PAL format

Order number **ISM-BLA1-CC-P**

#### ISM-BLA1-LM Blue Line Nightlight Module

Fits all Blue Line detectors

Order number **ISM-BLA1-LM**

#### ISM-BLA1-SM Blue Line Sounder Module

Fits all Blue Line detectors

Order number **ISM-BLA1-SM**

### B328 Gimbal-mount Bracket

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

### Swiveling B335-3 low-profile mount

Swiveling, low-profile, plastic mount for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°. Available in triple packs.

Order number **B335-3**

### B338 Universal Ceiling-mount Bracket

Swiveling plastic mount for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

#### Represented by:

##### Americas:

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

##### Europe, Middle East, Africa:

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

##### Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

##### China:

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

##### America Latina:

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com