

3375 Fox & Hound Jr Compact Tone & Probe Kit

Pocket sized tone generator and inductive amplifier probe


Features:

- The Fox and Hound Jr wire tracing kit is ideal for security, thermostat, data, telephone, audio and other types of wiring
- The toner generates a warble tone with a user adjustable pitch
- Adjustable sensitivity/volume control with visual signal strength indicator
- Non-conductive probe tip
- LED that can detect trace tones up to 12" away
- Built-in earphone jack that will automatically mute the loudspeaker for use in quiet or noisy areas
- Power beeper reminds user that the unit is on
- Connects easily using alligator clips or RJ-11 / RJ-45 combo plug and has 120VAC line cross protection
- Complete with (2) A23 batteries and case
- 1 year warranty




Specifications

| Fox Jr | |
|---------------------------|--|
| Output Frequency | 800kHz to 5kHz |
| Frequency Adjustment | Thumbwheel |
| Output Voltage | 6vpp square wave (open circuit) |
| Tracer Tone | Warble |
| Max. AC/DC Live Voltage | 120V |
| Connections | Alligator Clips and RJ11/RJ45 combo modular plug |
| Lead Length | 4" |
| Battery | 12V (A23) |
| Dimensions | 5.8 x 1.25 x 0.8" (147 x 31.8 x 20.3mm) |
| Weight | 1.6oz (45.4g) |
| Hound Jr | |
| Probe | Non-conductive, insulated |
| Sensitivity | Adjustable with thumbwheel (detects Fox Jr up to 12" away) |
| Signal Strength Indicator | Bright red dual LED visual signal strength indicator and speaker |
| Earphone Jack | Accepts 1/8" mono or stereo earphone plug (mutes speaker) |
| Battery | 12V (A23) |
| Power On Reminder | Hound Jr beeps and flashes periodically |
| Dimensions | 5.8 x 1.25 x 0.8" (147 x 31.8 x 20.3mm) |
| Weight | 1.6oz (45.4g) |

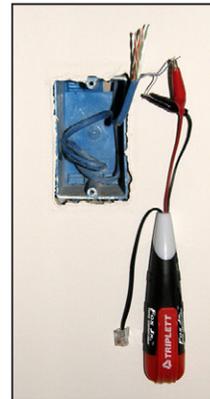

Alligator clips for easy toning of any 2 pair

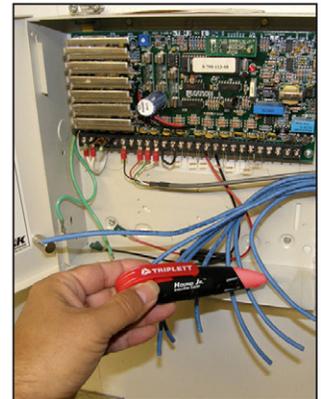

Signal strength LED to help determine proper cable location in a bundle

Ordering Information:

3375 Fox & Hound Jr Compact Tone & Probe Kit