


760090309 | Z-048-DS-8W-FMUBK

Indoor/Outdoor Low Smoke Zero Halogen Riser Distribution Cable, 48 fiber multi-unit with 12 fiber subunits

## Representative Image

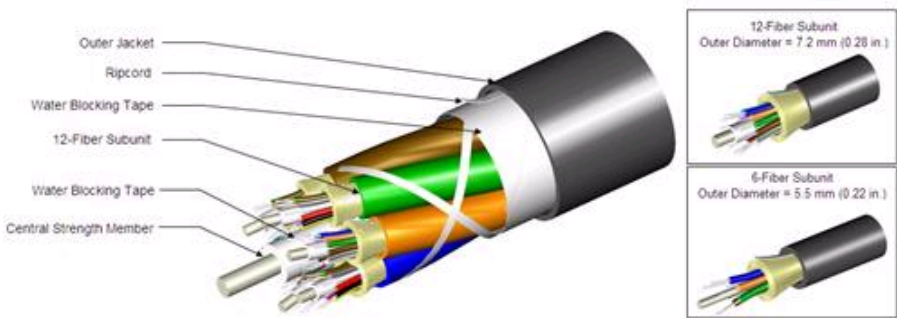

## General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free

## Construction Materials

Fiber Type Solution	TeraSPEED®, zero water peak singlemode fiber
Total Fiber Quantity	48
Fiber Type	TeraSPEED®, zero water peak singlemode fiber
Fiber Type, quantity	48
Fibers Per Subunit, quantity	12
Jacket Color	Black
Jacket UV Resistance	UV stabilized

## Dimensions

Buffer Tube/Subunit Diameter	7.20 mm   0.28 in
Cable Weight	206.0 lb/kft   307.0 kg/km
Diameter Over Jacket	19.50 mm   0.77 in
Subunit, quantity	4

## Physical Specifications

Minimum Bend Radius, loaded	29.2 cm   11.5 in
Minimum Bend Radius, unloaded	19.5 cm   7.7 in
Tensile Load, long term, maximum	240 lbf   1068 N
Tensile Load, short term, maximum	800 lbf   3560 N

760090309 | Z-048-DS-8W-FMUBK

Vertical Rise, maximum 354.0 m | 1161.4 ft

## Flame Test Specifications

Flame Test Listing	NEC OFNR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3   IEC 60754-2   IEC 61034-2   IEEE 383   UL 1666   UL 1685

## Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH)   Riser
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

## Mechanical Test Specifications

Compression	126 lb/in   22 N/mm
Compression Test Method	FOTP-41   IEC 60794-1-2, Section 7
Flex	100 cycles
Flex Test Method	FOTP-104   IEC 60794-1-2, Section 10
Impact	4.34 ft lb   5.88 N-m
Impact Test Method	FOTP-25   IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1-2, Section 11
Water Penetration	24 h
Water Penetration Test Method	FOTP-82   IEC 60794-1-2, Section 24

## Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-28   IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1-2, Section 22

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-104-696-2001   EN 187105   Telcordia GR -20-CORE Issue 3 (water penetration)   Telcordia GR-409-CORE Issue 2
-------------------------------	--

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



## Included Products

---

CS-8W-TB (Product Component—not orderable) — TeraSPEED® Singlemode Fiber