




4604605/10 | 2002 TEAL REEL

Sunlight and Oil Resistant Category 5e U/UTP 2002 Cable, non-plenum, teal jacket, 4 pair count, 3000 ft (914 m) length, reel

## Cross Section Drawing

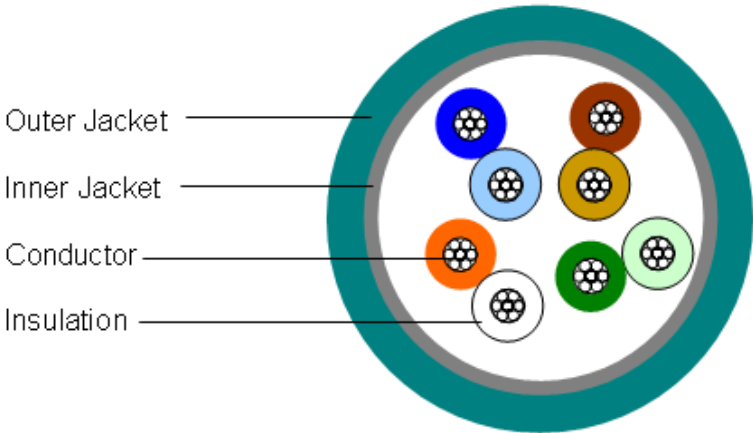

## Construction Materials

Conductor Material	Bare copper
Insulation Material	Polyolefin
Jacket Material	PVC

## Dimensions

Cable Length	305 m   1000 ft
Cable Weight	29.27 lb/kft
Diameter Over Inner Jacket	5.588 mm   0.220 in
Diameter Over Jacket	6.502 mm   0.256 in
Inner Jacket Thickness	0.508 mm   0.020 in
Jacket Thickness	0.457 mm   0.018 in

## Electrical Specifications

ANSI/TIA Category	5e
dc Resistance Unbalance, maximum	5 %
dc Resistance, maximum	9.38 ohms/100 m
Delay Skew	45 ns
Mutual Capacitance	5.6 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	69 %
Operating Frequency, maximum	100 MHz
Transmission Standards	ANSI/TIA-568-C.2

4604605/10 | 2002 TEAL REEL

Safety Voltage Rating	300 V
Dielectric Strength, minimum	1500 Vac   2500 Vdc

## Environmental Specifications

Environmental Space	Non-plenum
Flame Test Method	CMR
Installation Temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

## General Specifications

Brand	Uniprise®
Cable Component Type	Cordage
Cable Type	U/UTP (unshielded)
Pairs, quantity	4
Jacket Color	Teal
Conductor Gauge, singles	24 AWG
Conductor Type, singles	Stranded
Conductors, quantity	8
Packaging Type	Reel
Product Number	2002

## Mechanical Specifications

Pulling Tension, maximum	11 kg   25 lb
--------------------------	---------------

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



## Electrical Performance

Std	Standard (ANSI/TIA-568)		
IL	Insertion Loss (dB/100m)	PSACR	Power Sum Attenuation to Crosstalk Ratio (dB/100m)
NEXT	Near End Crosstalk (dB/100m)	ACRF	Attenuation to Crosstalk Ratio - Far End (dB/100m)
ACR	Attenuation to Crosstalk Ratio (dB/100m)	PSACRF	Power Sum Attenuation to Crosstalk Ratio - Far End (dB/100m)
PSNEXT	Power Sum Near End Crosstalk (db/100m)	RL	Return Loss (dB)

Freq. MHz	IL	NEXT	ACR	PSNEXT	PSACR	ACRF	PSACRF	RL
	Std	Std	Std	Std	Std	Std	Std	Std
1	2.4	65.3	62.9	62.3	59.9	63.8	60.8	20.0
4	4.9	56.3	51.4	53.3	48.4	51.8	48.8	23.0
8	6.9	51.8	44.8	48.8	41.8	45.7	42.7	24.5
10	7.8	50.3	42.5	47.3	39.5	43.8	40.8	25.0
16	9.9	47.2	37.3	44.2	34.3	39.7	36.7	25.0
20	11.1	45.8	34.7	42.8	31.7	37.8	34.8	25.0
25	12.5	44.3	31.8	41.3	28.8	35.8	32.8	24.2
31.25	14.1	42.9	28.8	39.9	25.8	33.9	30.9	23.3
62.5	20.4	38.4	17.9	35.4	14.9	27.9	24.9	20.7
100	26.4	35.3	8.9	32.3	5.9	23.8	20.8	19.0