CCS - EFX COMBINATION CABLING SECTION EXTENDED FINGERS

KEY FEATURES

- Cable openings on the front of CCS - EFX align with RMU spaces on the rack allowing cables to exit by-RMU.
- Cable openings on the front of CCS - EFX are sized to accommodate 48 patch cords, twice the capacity of the standard CCS. Openings have rounded edges to protect cable and will not deform or break.
- The front door hinges open to the right or left for easy access to cables during MACs and locks in the closed position to protect cables from damage.
- Open rear of CCS - EFX allows large premise cable bundles to exit the manager into the rack-mount space.

APPLICATIONS

- Use CCS - EFX Combination Cabling Section - Extended Fingers Xtra Large Capacity in small to medium size facilities in Telecommunications Rooms (TR) and Equipment Rooms (ER) to support the Main Cross-Connect (MC), Intermediate Cross-Connect (IC) or Horizontal Cross-Connect (HC) and voice and network switching equipment.
- CCS - EFX is an excellent choice for managing cables from angled-face copper patch panels.

RELATED ACCESSORIES

- Standard Rack/Universal Rack
- Combination Cabling Sections
- Universal Horizontal Cable Managers
- Double-Sided Universal Horizontal Cable Managers
- Cable Distribution Spools
- Cable Runway Radius Drops
- Saf-T-Grip® Reusable Cable Management Straps

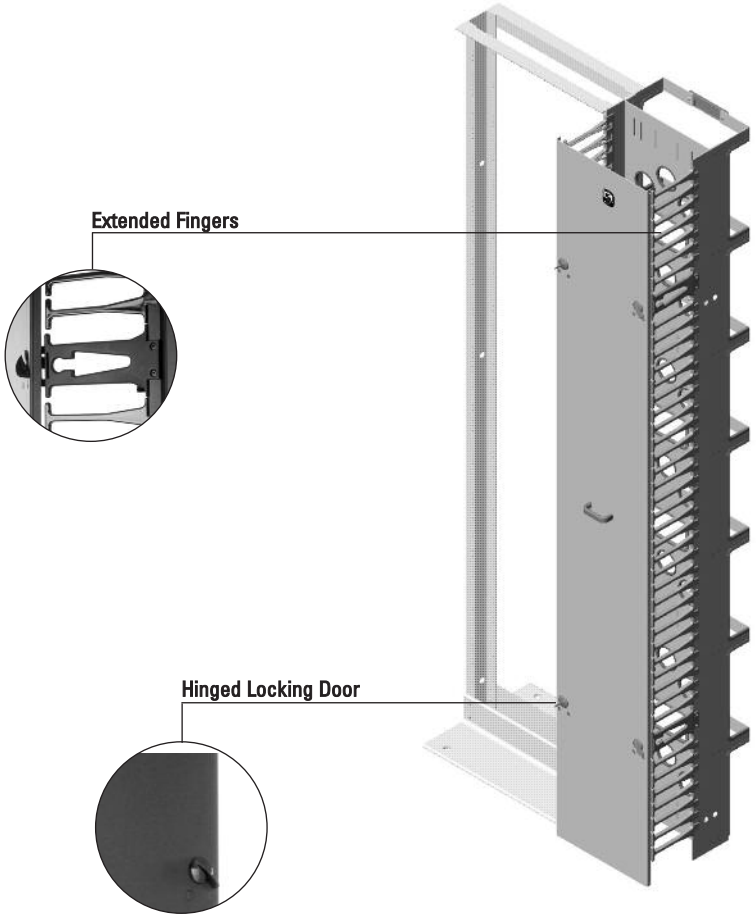

The CCS - EFX Combination Cabling Section - Extended Finger Xtra Capacity is a double-sided vertical cable management trough designed for use with CPI's Universal and Standard Racks to manage cable at the cross-connect, especially when using angled-face copper patch panels.

The front side of CCS - EFX features a patented system of large cable openings that align with each rack-mount space on the rack providing by-RMU control of patch cords. The T-shaped "fingers" extend 2-1/2" further than those used on the standard CCS providing support for patch cords as they sweep to connect with angled face patch panels. The additional depth creates a larger cable fill area. The larger cable openings allowing more patch cords to exit per RMU when racks support network switches. CCS - EFX includes a hinged front door that opens to the right or left to provide easy access to cable. The door locks in the closed position to protect cables and provide a clean, finished look.

The rear side of CCS - EFX is an open trough design with regularly spaced spin-latch closures. All edges are protected to prevent cable nicks. This design allows larger premise cable bundles to exit the trough into the rack-mount space.

The CCS - EFX is manufactured from a combination of strong, lightweight aluminum sheet and plenum-rated composite materials for maximum strength at minimal weight. CCS - EFX is packaged in a single carton for easy handling and includes installation hardware.

See reverse for product selection. Contact CPI Technical Support for configuration assistance.

CHATSWORTH PRODUCTS, INC.

+1-800-834-4969

techsupport@chatsworth.com
www.chatsworth.com

SPECIFICATIONS

- Double-sided trough
- 1 RMU high cable openings (front)
- Locking hinged door (front)
- Spin open latches (rear)
- Available in three widths

- **Cable capacities:**
  See the cable fill table at
  www.chatsworth.com/cablefill

- **Footprints:**
  6.00"W x 14.94"D
  10.00"W x 14.94"D
  12.00"W x 14.94"D

- **Height:**
  7' (84")
  7'- 6" (90")
  8' (96")

- **Materials:**
  5052-H32 aluminum sheet
  UL 94V-O Flame Resistant composite

- **Finish:**
  Black

Note: CCS-EFX Total Capacity @50% cable fill without cable spools

DIMENSIONS

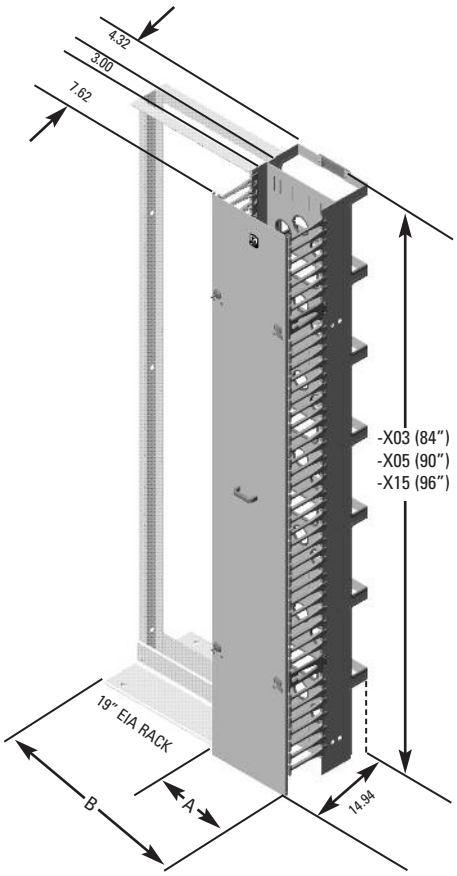

Part Number			Width	
7'H (84")	7'-6"H (90")	8'H (96")	A	B
40098-703	40098-705	40098-715	6.00	26.31
40099-703	40099-705	40099-715	10.00	30.31
40100-703	40100-705	40100-715	12.00	32.31

ORDERING INFORMATION

CCS-Extended Fingers					
Part Number	Description			Color	Shipping Weight
	Width	Depth	Height		
40098-703	6"	14.94"	7'	Black	38 lb
40099-703	10"	14.94"	7'	Black	52 lb
40100-703	12"	14.94"	7'	Black	56 lb
40098-705	6"	14.94"	7'-6"	Black	41 lb
40099-705	10"	14.94"	7'-6"	Black	56 lb
40100-705	12"	14.94"	7'-6"	Black	60 lb
40098-715	6"	14.94"	8'	Black	44 lb
40099-715	10"	14.94"	8'	Black	60 lb
40100-715	12"	14.94"	8'	Black	64 lb

CHATSWORTH PRODUCTS, INC.

©2010 Chatsworth Products, Inc. All rights reserved. CPI, CPI Passive Cooling, MegaFrame, Saf-T-Grip, Seismic Frame, SlimFrame, TeraFrame, Cube-iT Plus, Evolution, OnTrac, and QuadraRack are federally registered trademarks of Chatsworth Products, Inc. GlobalFrame, Simply Efficient and Velocity are trademarks of Chatsworth Products, Inc. All other trademarks belong to their respective companies. Rev.3 11/10 MKT-60020-239