

Two Gigabit Ports Plus Easy Browser-based Management



NETGEAR® ProSafe® Smart Switches fill the gap between unmanaged and fully managed switches. The family of ProSafe Smart Switches is designed for growing businesses that want control over their network without the cost and complexity of a full Layer 2/Layer 3 management implementation. This second generation Smart Switch, FS726T, with affordable built-in gigabit power, easily connects to servers or a Gigabit-speed backbone for a non-stop 10/100/1000-enabled network that can quickly deliver large multimedia, image, and video files. With the utility of 24 10/100 Mbps ports, 2 copper 10/100/1000 Mbps ports and an SFP slot for optional fiber connectivity, growing business networks, classrooms and workgroups can benefit from superior performance and keep up with expanding network needs. This high-performance switch features a non-blocking wire-speed architecture with an 8.8 Gbps switching capacity for maximum data throughput. All 26 RJ-45 ports automatically negotiate to the highest speed and support Auto Uplink™ technology to make the right link.

In addition, an intuitive, Web-browser interface offers the simple Smart Switch management, making it a snap to monitor switch performance, configure ports, even set up port trunks, VLANs, and traffic prioritization. Alternatively, use SNMP-based software to manage your Smart Switch. Shipped ready for use straight out of the box, it delivers switching that's easy to set up and use. NETGEAR ProSafe Smart Switches are ideal for adding basic management to your unmanaged networks and extending your managed networks.

**Dynamic**

Two RJ-45 copper Gigabit ports and an SFP slot for optional fiber make it possible to create high-speed connections to a server or network backbone whether it's nearby or far away, Auto-Negotiation on each port senses the link speed of a network device (either 10, 100, 1000 Mbps) and intelligently adjusts for compatibility and optimal performance.

**Sharp**

Web-based Smart management features include performance monitoring, port configuration, VLAN for traffic control, port trunking for increased bandwidth, and Class of Service (CoS) for traffic prioritization.

**Convenient**


LEDs on the front panel make switch status easy to observe and troubleshooting easy to accomplish. Use as an unmanaged switch for plug & play operation or use the Smart Wizard to easily access the intuitive web-based management features.

**Reliable**

Made to last, this durable switch is housed in a 17" metal box. Works with Windows, Macintosh O/S, Linux and Netware Operating systems.††

Like all NETGEAR ProSafe Smart Switches, the FS726T is backed by the NETGEAR ProSafe Lifetime Warranty†, and 1-Year ProSupport 24x7 Advanced Technical Support\*.

†† Requires PC running Windows for initial Smart Switch access

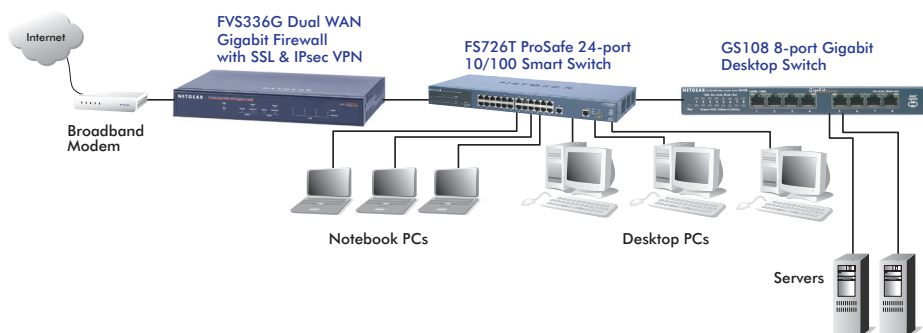

**Technical Specifications****• Network Protocol and Standards Compatibility**

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3z 1000BASE-X
- IEEE 802.3x full-duplex flow control

**• Power Supply**

- Power Consumption: 13 W maximum
- 100-240VAC/50-60 Hz universal input

**• Network Ports**

- 24 10/100 Mbps auto sensing Fast Ethernet - 2 10/100/1000 Mbps auto-sensing Gigabit Ethernet switching ports (RJ-45)
- 1 SFP slot for SFP GBIC Modules

**• Physical Specifications**

- Dimensions (W x D x H): 440 x 205 x 43 mm (17.8 x 8.1 x 1.6 in.)
- Weight: 2.5 kg (5.5 lb)

**• Electromagnetic Emissions**

- CE mark, commercial
- FCC Part 15 Class A
- VCCI Class A
- C-Tick

**• LEDs**

- Per port: (10/100 and Gigabit): Link/ Activity, Speed
- Per device: Power

**• Electromagnetic Immunity**

- EN 55024

**• Safety**

- CE mark, commercial
- cUL IEC950/EN60950

**• Administrative Switch Management**

- IEEE 802.1Q Static VLAN (Up to 64)
- Port-based VLAN (Up to 26)
- IEEE 802.1p Class of Service (CoS)
- Port-based QoS
- DSCP – Layer 3 QoS
- IEEE802.3ad (manual) Link Aggregation
- IEEE 802.1D Spanning Tree Protocol
- RFC 1157 SNMP v1\*
- RFC 1213 MIB II
- RFC 1643 Ethernet Interface MIB
- RFC 1493 Bridge MIB
- RFC 2131 DHCP client
- Static IGMP and IGMP Snooping v1
- Private Enterprise MIB
- Port Mirroring Support
- Web-based configuration
- Rate limiting
- Configuration Backup/Restore
- Password Access Control
- Broadcast storm control
- Firmware upgradeable

**• Performance Specifications**

- Forwarding modes: Store-and-forward
- Bandwidth: 8.8 Gbps
- Network latency: <20 $\mu$ s for 64-byte frames in store-and-forward mode for 100 Mbps to 100 Mbps transmission
- Buffer memory: 256 KB embedded memory per unit
- Address database size: 8,000 media access control (MAC) addresses per system
- Addressing: 48-bit MAC address
- Mean Time Between Failure (MTBF): 305,000 hours (~35 years)
- Acoustic Noise: 0 dB

**• Modules**

- AGM731F 1000BASE-SX SFP Module
- AGM732F 1000BASE-LX SFP Module
- AGM733 1000BASE-ZX SFP Module

**• System Requirements**

- Category 5 UTP cables or above
- Network card for each PC
- Network software (e.g., Windows®)
- Web Browser (e.g., Internet Explorer 5.0 or higher - Netscape 6.0 or higher)

**Warranty and Support**

- ProSafe Lifetime Warranty†
- ProSupport 24x7 Advanced Technical Support, 1 year (included)\*

**ProSupport™ Service Packs Available**

- XPressHW, Category 1: PRR0331 (3-year next-business day hardware replacement contract)
- OnCall 24x7, Category 1: PMB0331 (3-year Advanced Technical Support contract, including Remote Diagnostics performed by our technical experts for prompt resolution of technical issues, and next-business day hardware replacement)

**Package Contents**

- 24-port Smart Switch with Gigabit Ports (FS726T)
- Rubber footpads
- Power cord
- Rack-mount kit
- Resource CD
- Installation guide
- Warranty/Support information card

**NETGEAR Related Products**

- 32-bit PCI Copper Gigabit Adapter (GA311)
- 1000BASE-SX SFP Module (AGM731F)
- 1000BASE-LX SFP Module (AGM732F)
- 1000BASE-ZX SFP Module (AGM733)

**Ordering Information**

- North America: FS726TNA
- Europe: FS726T-100EUS
- Asia: FS726TAU
- Japan: FS726TJP

**NETGEAR®**

350 E. Plumeria Drive  
San Jose, CA 95134-1911 USA  
1-888-NETGEAR (638-4327)  
E-mail: info@NETGEAR.com  
www.NETGEAR.com

© 2012 NETGEAR, Inc. NETGEAR, the NETGEAR Logo, Connect with Innovation, Auto Uplink, ProSafe and ProSupport are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. All rights reserved.

\* 1-year 24x7 Advanced Technical Support includes Remote Diagnostics performed by our technical experts for prompt resolution of technical issues.

† Lifetime warranty for product purchased after 05/01/2007. For product purchased before 05/01/2007, warranty is 3 years.

D-FS726T-3