



Maximize Floor Space Reduce Real Estate Costs



THE ULTIMATE HIGH DENSITY CABLE MANAGEMENT SOLUTION

for Data Centers and Telecommunications Rooms

The Ultimate Cable Management Solution for Data Centers and Telecommunications Rooms

Designed to reduce real estate costs, maximize network reliability and provide flexible system design, *Mini-Com*[®] Angled Modular Patch Panels and *PatchRunner*[™] Vertical Cable Managers deliver a complete solution for data centers and telecommunications rooms.

Solution Benefits

Reduce real estate costs with innovative patented angled modular patch panels and space saving vertical cable managers. These products work together to provide up to quadruple the density reducing costs in data centers and telecommunications rooms.

- Angled high density modular patch panels provide 48 ports in one rack space
- Bend radius fingers on vertical cable managers eliminate the need for horizontal cable managers

Ensure network reliability with a complete solution that protects cables from strain, maintains data integrity and delivers reliable network performance.

- Angled modular patch panel design promotes proper bend radius of patch cords as they are routed into the vertical pathway
- Bend radius fingers on vertical cable managers support the cables as they transition to the vertical pathway to ensure data integrity

Achieve flexible system design with angled modular patch panels and adaptable vertical cable managers.

- Modular patch panels accept MINI-COM® Copper, Fiber and Coax Modules providing complete modularity for mixed media applications and future upgrades
- Slack management spools on vertical cable managers can be repositioned to organize and manage cables providing maximum design flexibility
- Inter-rack pathways can be positioned at the top and/or bottom of the rack minimizing the need to route cables under the floor or overhead

PATENTED ANGLED PATCH PANEL





Maximum Density
Minimum Floor Space


PANDUIT Cable Management Solutions Standard vs. High Density

To illustrate the type of savings that can be achieved, in a 960 port application, a comparison of a standard vs. high density cable management solution demonstrates a more efficient use of space and the cost savings realized.

Reduce System Layout Width by 36%

		Width	
Standard Layout	Qty.	ln.	mm
CMR19X84 standard EIA channel racks	4	20.31	515.8
WMPV45 vertical managers	2	4.24	107.7
WMPVHC45 vertical managers	3	5.87	149.1
WMPVCB center mounting kits	3	N	/A
WMPH2E horizontal managers	20	N/A	
CPP48WBL 48 port modular patch panels	20	N/A	
Total (not including jack modules)	52	107.3	2725.9

	Width		
High Density Layout	Qty.	ln.	mm
CMR19X84 standard EIA channel racks	2	20.31	515.8
PRV12 vertical managers	1	12	304.8
PRV8 vertical managers	2	8	203.2
PRD12 hinged doors	1	N	/A
PRD8 hinged doors	2	N	/A
CPPLA48WBL 48 port angled modular patch panels	20	N	/A
Total (not including jack modules)	28	68.6	1742.4

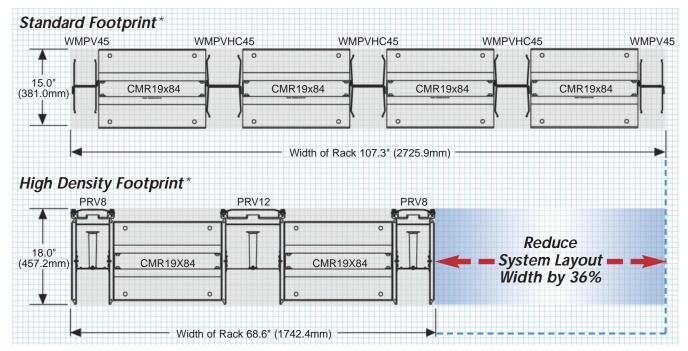


Reduce Square Footage and Real Estate Costs Up to 23%

	Standard	High Density	Benefits
Number of parts	52	28	Reduce installation time with 46% fewer system components to manage
Layout width	107.3" (2725.9mm)	68.6" (1742.4mm)	36% narrower profile is ideal for space constrained applications
Square footage	11.2 ft ² (1.04M ²)	8.6 ft ² (0.80M ²)	Smaller footprint saves 23% floor space
Real estate cost**	\$4,480	\$3,440	Resulting space savings reduces real estate costs 23%

^{*}Representative application, actual configurations may vary.

^{**}Based on \$400/ft² annually.

PANDUIT Cable Management System Roadmap

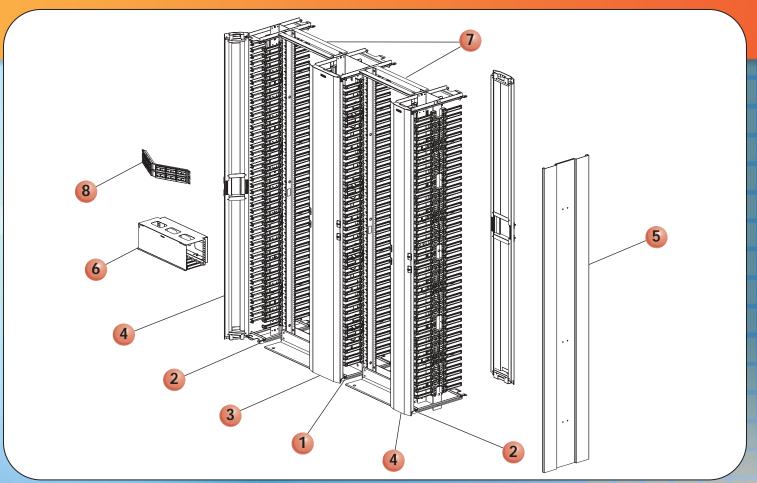

Ref. No.	Part Number	Description		Ref. No.	Part Number	Description
	Vertical Managers				Accessories	
1	PRV12	Vertical manager,	12"W x 7'H, front and rear	5	PREP	End panel
2	PRV8	Vertical manager,	8"W x 7'H, front and rear	6	NCMHAEF4	Horizontal manager pathway, 4 RU
	PRV6	Vertical manager,	6"W x 7'H, front and rear		NCMHAEF2	Horizontal manager pathway, 2 RU
	PRVF12	Vertical manager,	12"W x 7'H, front only		EIA Rack	
	PRVF8	Vertical manager.	8"W x 7'H, front only	7	CMR19X84	19"W x 7'H standard EIA rack, 45 RU
	DDVE		•		Angled Patch Pan	pels
	PRVF6	vertical manager,	6"W x 7'H, front only		CPPA48HDWBL	Angled patch panel, 48 port, high density, 1 RU
	Hinged Doors				CPPLA24WBL	Angled patch panel, 24 port, 1 RU
3	PRD12	Dual hinged door,	12"W, front or rear	8	CPPLA48WBL	Angled patch panel, 48 port, 2 RU
4	PRD8	Dual hinged door,	8"W, front or rear		CPPA24FMWBL	Angled patch panel, 24 port, flush mount 1 RU
	PRD6	Dual hinged door,	6"W, front or rear		CPPA48FMWBL	Angled patch panel, 48 port, flush mount 2 RU
0	DI 4.75" /44.45				CPPA72FMWBL	Angled patch panel, 72 port, flush mount 2 RU
	RU = 1.75" (44.45mm product color is black.	1).				

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA Markham, Ontario cs-cdn@panduit.com Phone: 800.777.3300

PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200 PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6379.6700 PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.3767.7011 PANDUIT LATIN AMERICA Jalisco, Mexico cs-la@panduit.com Phone: 52.333.666.2501 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to www.panduit.com/warranty



Contact Customer Service by email: cs@panduit.com or by phone: 800-777-3300

© 2005 PANDUIT Corp.
ALL RIGHTS RESERVED
Printed in the U.S.A.
WW-RKCB03