


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	MATERIAL	"B" HEIGHT +/- .062	IMPRINT AREA "C" +/- .062	VERTICAL REPEAT "D" +/- .062	LABELS PER ROW	STANDARD PKG. QTY.
S100X075VA1Y	GMV16 OR GMV17 	0.75 [19.1]	0.25 [6.35]	1.00 [25.4]	4	2500
S100X125VA1Y		1.25 [31.8]	0.38 [9.65]	1.50 [38.1]	4	2500
S100X150VA1Y		1.50 [38.1]	0.50 [12.7]	1.80 [45.7]	4	2500
S100X225VA1Y		2.25 [57.2]	0.75 [19.1]	2.50 [63.5]	4	1500
S100X250VA1Y		2.50 [63.5]	1.00 [25.4]	2.75 [69.8]	4	1500
S100X400VA1Y		4.00 [101.6]	1.00 [25.4]	4.25 [108.0]	4	1000
S100X650VA1Y		6.50 [165.1]	1.50 [38.1] +/- .10	6.75 [171.4]	4	250

NOTES:
1. MILLIMETERS ARE IN [].

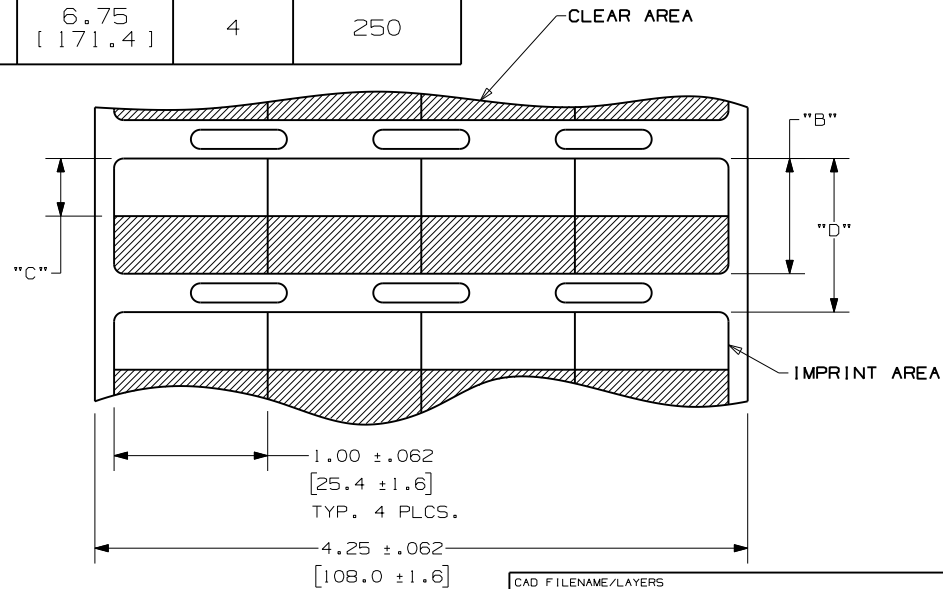

CAD FILENAME/LAYERS

100472BS_DC_C10194/11H

7	10/25/11	RVU		"GMV16 OR GMV17" WAS "GMV".	6548	R				PANDUIT CORP. TINLEY PARK, ILLINOIS CUSTOMER DRAWING OPTIMUM SELF-LAM. S100X***VA1Y THERMAL TRANSFER PRINTABLE LABELS UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .12 (XXX) ± .025 (.XX) ± .062 ANGLES ± UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION. SCALE NTS DRAWING NO. C10194 DWG A SIZE	
6	12/10/09	RVU		GMV WAS GMV16. ADD +/- .10 TO 1.50.	5925	R					
5	10/1/09	RVU		MILLIMETERS INCORRECT. [63.5] WAS [57.2], [9.65] WAS [9.53], [25.4] WAS [19.0], & [38.1] WAS [12.7].	5863	R					
4	2/25/09	RVU		OBSOLETE PARTS: S***X***VA1, AND S***X***TA1. UPDATE TOLERANCE WITH +/- .062.	5682	R					
3	6/13/08	RVU		VOID	5464	R				SEE TABLE	
2	5/25/07	RVU		ADDED NEW P/N, S100X225VA1Y.	5021	R					
1	1-8-07	RVU		REVISED TOLERANCE.	4830	R					
0	9-11-06	RVU		DRAWING RELEASED.	4671	R					
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	CHK'D		