


+

A technical drawing of a roof edge detail. It shows a cross-section of a roof structure with a metal cap or flashing. A triangular warning symbol with the letter 'D' inside is positioned below the roof edge, with an arrow pointing to the edge of the cap, indicating a falling object hazard.

LDPH10 OPEN POSITION

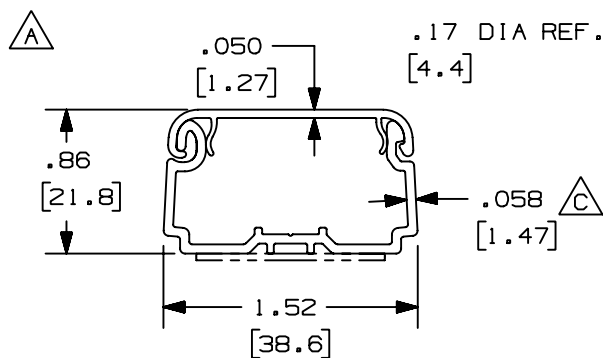

LDPH10 CLOSED POSITION

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLORS AND/OR PACKAGE QUANTITY.
2. PART IS DESIGNED TO SUPPORT MAXIMUM WEIGHT ON A CLEAN, DRY, SMOOTH SURFACE. THE SURFACE MUST BE PROPERLY PREPARED IN ACCORDANCE WITH PANDUIT RECOMMENDATIONS.
3. TO APPLY PART (ADHESIVE BACKING INSTALLATION ONLY):
 - a. REMOVE PROTECTIVE FILM
 - b. PLACE PART IN DESIRE LOCATION
 - c. APPLY PRESSURE TO FLAT SURFACE ON RACEWAY
4. DIMENSIONS IN PARENTHESES ARE IN METRIC.
5. NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. THE CONDITIONS UNDER WHICH THESE RACEWAYS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

+