


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	DESCRIPTION	WEIGHT
CJ88XXXX	8 POSITION, 8 WIRE TERMINATION CAP 15 COLOR CODED FOR EIA/TIA 568A AND/OR 568B WIRING.	1.62 LB/100 PCS (738 g/100 PCS)

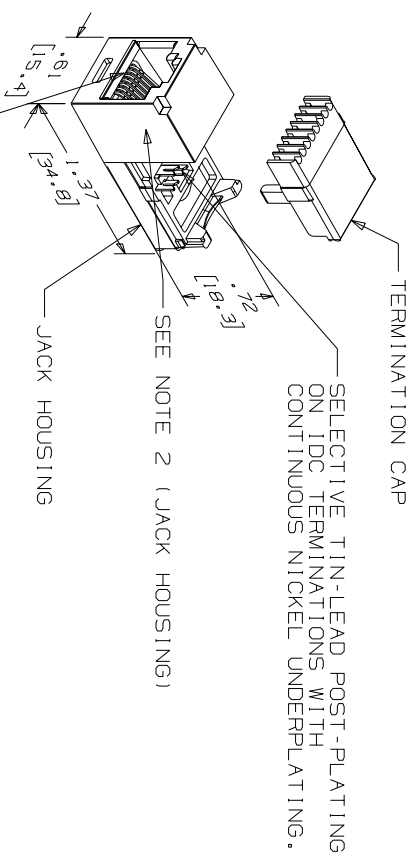

- NOTE:
- SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
 - JACK HOUSING - ABS - NOMINAL WALL THICKNESS .078(2.01).
 - ALL MINI-JACK 8 POSITION, 8 WIRE CONNECTOR MODULES ARE UNIVERSAL IN DESIGN. THEY WILL ACCEPT TWO, THREE, OR FOUR PAIR MODULAR PLUGS WITHOUT DAMAGE.
 - THIS PART IS DESIGNED FOR USE WITH MINI-COM PLATES & BOXES.
 - MEETS ALL CATEGORY 3 PERFORMANCE REQUIREMENTS AS DEFINED BY EIA/TIA.
 - DIMENSIONS IN PARENTHESIS ARE IN METRIC.

CAD FILENAME/NUMBERS		MO2479MV_DC335_00A.PRT	
PANDUIT		CORP. TINELEY PARK, ILLINOIS	
MINI-JACK CATEGORY 3 TWISTED PAIR CONNECTOR MODULE CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: 1.X) ± .03 1.XXI ± .01 ANGLES ± 1°		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.	
DRAWN BY NER		SCALE NONE	
DATE 03-24-06		DRAWING NO. 02479-335	
CHECKED BY		DWS A	
AS NOTED			
MATERIAL:			
RELEASED TO PRODUCTION			
02479-335			
ECN			
CHK			
CUST			
SUP			
DESCRIPTION			
BY			
CHK			
DATE			
REV			
3-24-06			
NER			