





PANDUIT P/N	WEIGHT
SP688-*	.047 LB/10 PCS (21.4 g/10 PCS)

NOTES:

1. MATERIAL: HOUSING, LOAD BAR, DIVIDER, STRAIN COLLAR - THERMOPLASTIC UL94V-0 RATED; STRAIN RELIEF BOOT - CLEAR PVC; CONTACT TERMINAL - PHOSPHOR BRONZE ELECTRO-POLISHED AND PLATED WITH .000050" MIN. GOLD IN MATING AREA, GOLD FLASH OVER REMAINDER, .000100" MIN. NICKEL UNDERPLATE.
2. PLUG ACCEPTS 4 PAIR CABLE .225-.250" DIA. WITH 24 AWG STRANDED CONDUCTOR WITH A MAXIMUM INSULATOR DIAMETER OF .040".
3. MEETS DIMENSIONAL REQUIREMENTS OF FCC PART 68 AND IEC 60603-7. ALL DIMENSIONS MAXIMUM UNLESS OTHERWISE SPECIFIED.
4. TERMINATED CONTACT HEIGHT DIMENSION: .237±.005".
5. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE PACKAGE QUANTITY.

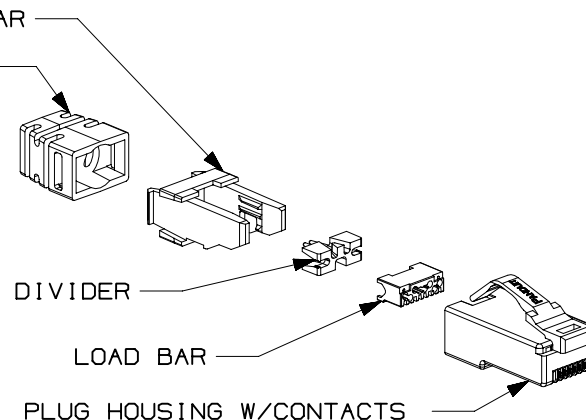

MODEL FILENAME		M01185AC_PLUG_ASSY_01		SIZE	
DRAWING FILENAME		M01185CC_DC15_01C.PRT		A	
TITLE TX-6™ PLUS MODULAR PLUG FOR CATEGORY 6 PATCH CORDS CUSTOMER DRAWING					
 		R CORP.		I.I. NUMBER	
TINLEY PARK, IL 60477				PRODUCT SPEC	
		ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±		WORK INSTRUCTION	
THIRD ANGLE PROJECTION				SCALE NONE	
DRAWN BY MDJr		REVIEW DRAWING NUMBERS		PART NO. SP688 - *	
DATE 9-30-02				DRAWING NO. 01185-15	
CHK'D NGM					