THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

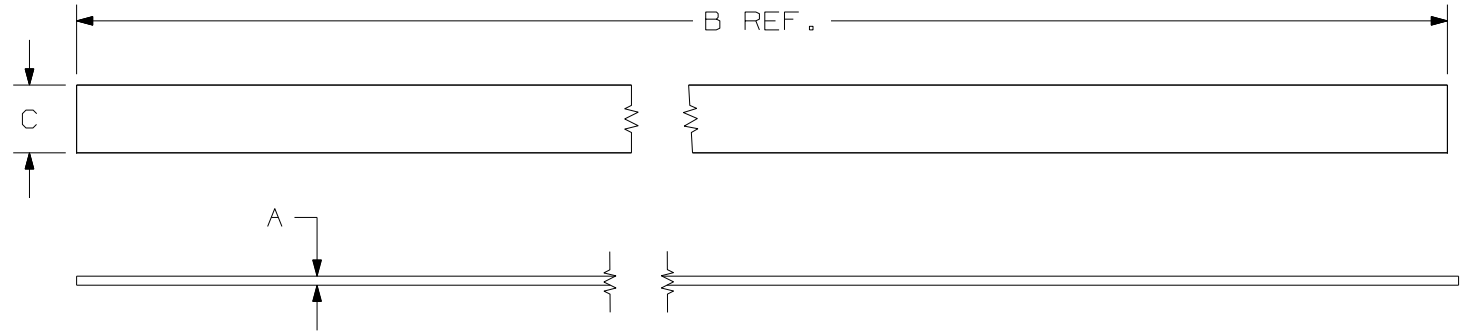

PANDUIT PART NO.	BUNDLE DIA. MIN. in (mm)	BUNDLE DIA. MAX. in (mm)	A in (mm)	B in (mm)	C in (mm)	MIN. LOOP* TENSILE lbs. (N)	ROLL DESCRIPTION	APPROXIMATE WEIGHT lbs/10 ROLLS (g)
HLS1.5S	.25 (6.4)	1.5 (38.1)	.100 (2.5)	6.0 (152)	.750 (19.1)	50 (222)	PERFORATED STRIPS QTY: 10 PIECES/ROLL	.43 (194)
HLS3S	.25 (6.4)	3.2 (81.3)	.100 (2.5)	12.0 (305)	.750 (19.1)	50 (222)		.85 (384)
HLS5S	.25 (6.4)	5.0 (127)	.100 (2.5)	18.0 (457)	.750 (19.1)	50 (222)		1.25 (568)
HLS-15R	.25 (6.4)	VARIOUS	.100 (2.5)	180 (4572)	.750 (19.1)	50 (222)	15 FT CONTINUOUS	1.25 (567)
HLS-75R	.25 (6.4)	VARIOUS	.100 (2.5)	900 (22860)	.750 (19.1)	50 (222)	75 FT	6.32 (2867)

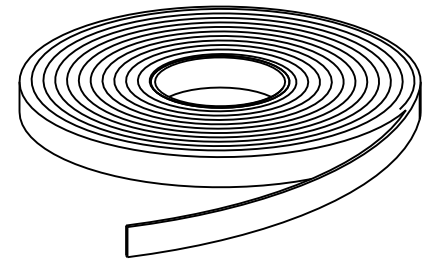

ILLUSTRATION 'A'

NOTES:

1) ALL LENGTHS PACKED IN ROLL FORM (SEE ILLUSTRATION 'A')
* 2) MINIMUM 2" OVERLAP REQUIRED TO ACHIEVE LOOP TENSILE RATING.
3) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR OPTIONAL COLORS.

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS

SS_27184.prt

PANDUIT CORP. TINLEY PARK, ILLINOIS

TAK-TY HOOK & LOOP CABLE TIES HLS SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± (.XXX) ± .035
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: KET
DATE: 12/30/98
CHK'D: HVP
MAT'L: POLYETHYLENE HOOK/ NYLON LOOP
SCALE: NONE
DRAWING NO.: SS-27184
DWG: A
SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
4	6/5/06	FAB	DWW	ADDED PART WEIGHTS TO DRAWING	27184 4		