

Sidekick V.O.C.

Part Number: 1143-5000



GREENLEE®
COMMUNICATIONS

A Textron Company

The Sidekick is the test set used by every major communications company in the United States to troubleshoot twisted pair applications. This lightweight, hand-held meter quickly and accurately uncovers intermittent troubles that other test sets can't detect. Since the introduction of the patented Stress Test and the Leakage Test in 1991, the Sidekick has become a benchmark in communications technology. Technicians now have the versatility to identify faults in inside wiring, such as bad jacks, opens, high resistance faults, series resistance faults, and defective splices. The versatile Sidekick is used to troubleshoot inside wiring and qualify its use for quality voice over service.

The Stress Test reads the audible noise produced on a faulted pair that is stressed by a 90 dBrnC longitudinal excitation. The Stress Test determines the capacitive and series resistance balance characteristics of twisted pair at any point along the pair. It is capable of identifying DC resistive or capacitive imbalances undetected by other subscriber loop tests. The Stress Test is also highly effective in identifying imbalances produced by series resistance opens (high joints).


The Leakage Test detects intermittent resistance faults that do not appear under normal VOM tests. When a faulted pair is taken out of service, galvanic action forms an insulating oxide layer over the faults. When returned to service, such pairs develop "noisy static" in a relatively short period of time. The Leakage Test uses 135 Volts to "punch through" the oxide layer and reveal the fault

FEATURES:

- Identifies defective Inside Wire and jacks.
- Measures resistance, AC/DC volts, quasi square wave, and pair balance.
- Identifies shorts, opens, crosses and grounds.
- Replaces the need for other meters.
- Provides tone for twisted pair or crossed conductor identification.
- Single set-up for testing Tip-Ring, Tip-Ground, and Ring-Ground with ground connection.
- Field replaceable leads.
- Softcase with adjustable hook.
- Low Battery indicator light.

SPECIFICATIONS:

Dimensions	10.75 x 4.25 x 2.5 inches
Weight	2 lbs.
Resistance	Rx1: Reads 0 to 2000 Ohms Rx1K: Reads 0 to 2 Megohms
Leakage	Rx10K: Reads 0 to 20 Megohms

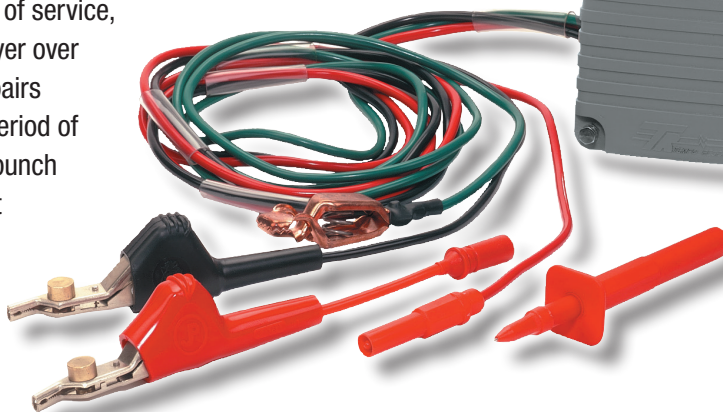

BENEFITS:

- Qualifies Inside Wire prior to activation.
- Reduces repeat service calls.
- Eliminates service interruptions.
- Works on any twisted pair application.
- Increases technician productivity.
- Provides quick return on investment.
- Improves customer satisfaction.

DC Voltage	0 to 100 Volts DC
AC Voltage	0 to 200 Vrms
Stress Test	0 to 82 dBrnC
Operating Temp.	-20°C to +60°C
Power	Four AA batteries

GREENLEE®
A Textron Company

www.greenlee.com • MA-5707 Rev 11/2011
4455 Boeing Drive • Rockford, IL 61109-2988 • USA • 815-397-7070
©2011 Greenlee Textron Inc. • An ISO 9001 Company • Printed in USA
Greenlee Textron Inc. is a subsidiary of Textron Inc.

USA

Tel: 800.435.0786
Fax: 800.451.2632

CANADA

Tel: 800.435.0786
Fax: 800.524.2853

INTERNATIONAL

Tel: +1.815.397.7070
Fax: +1.815.397.9247