


Foam Skin ALVYN Riser

Riser Cable For Voice and Digital Transmission
Spec. 2507 • Type CMR • Bell System Type: ARMM (24 AWG)

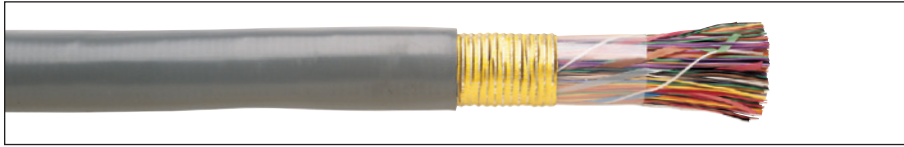


PRODUCT NUMBER	PAIRS	AWG	O.D. (INCHES)	WEIGHT (LBS/KFT)	STANDARD LENGTH (FT)
2019000	25	24	0.53	142	5000
2019001	50	24	0.66	234	5000
7507601	100	24	0.85	410	5000
7507619	200	24	1.20	760	2500
7507627	300	24	1.40	1105	2500
7507635	400	24	1.50	1445	2500
7507643	600	24	1.90	2150	1250
7507650	900	24	2.20	3170	1250
7507668	1200	24	2.60	4185	1000

Data subject to change without notice.

Note: Non-stock items may be subject to minimum order quantities.

Electrical Characteristics

	24 AWG			
DC Resistance (max)	27.3	Frequency	Attenuation dB/100 m (max)	NEXT dB
Ohms/1000 ft @ 20°C		0.772 MHz	2.2	43
Mutual Capacitance (nom)	83	1 MHz	2.6	41
nF/mile @ 1 kHz		4 MHz	5.6	32
		8 MHz	8.5	28
		10 MHz	9.7	26
		16 MHz	13.1	23

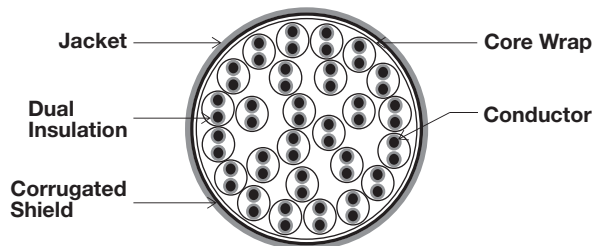

Product Construction

Conductors:

- 24 and 26 AWG solid bare annealed copper

Insulation:

- Dual insulation consisting of an inner layer of foamed polyolefin surrounded by a solid PVC skin
- Primary insulation, nominal O.D. = 0.031"
- Secondary insulation, nominal O.D. = 0.035"

Color Code:

- See Color Code Chart on page 97, except no bandmarking; only solid colors

Core Wrap:

- Non-hygroscopic dielectric tape applied longitudinally with an overlap

Shield:

- 0.008" corrugated, adhesive-coated aluminum bonded to jacket

Jacket:

- Gray flame-retardant PVC jacket bonded to the coated aluminum

Packaging

- Standard lengths are shipped on returnable steel reels or on non-returnable wood reels when requested
- ARAM (22 AWG) is available upon request

Applications

- Intended primarily for placement in vertical risers in buildings and may be used in general horizontal applications
- Designed for voice and carrier transmission between the station protector frames and other equipment terminals

Compliances

- ANSI/TIA 568-C.2
- Bellcore Specification TR-TSY-000111
- UL and c(UL) Type CMR