

S E N T R O L

P R O D U C T I N F O R M A T I O N B U L L E T I N



1285T SERIES MAGNETIC CONTACTS

Surface Mount with Screw Terminal™

Model numbers:

~~1282TW, 1283TW, 1284TW, 1285T, 1285TW,~~
~~1286T, 1286TW, 1287T, 1287TW, 1287TH~~



- **Terminals feature self-lifting washers**
- **Captured screws with combination heads**
- **Angled terminals for easy installation**
- **Wide gap models available**
- **Mounting hardware included**


The Sentrol 1285T Series surface mount magnetic contact is ideal for residential and commercial applications where terminal connects are preferred. The unit features Sems style terminals that have self-lifting washers and captured screws to prevent the screws from backing out. The screws have combination heads that accept either Phillips or flat blade drivers. The terminals are angled away from the mounting surface to allow for quick and easy installation. Snap-on covers conceal the terminals and mounting screws for a clean professional appearance. Wide gap, SPDT, ~~and high-security~~ models are available.

continued

1285T Series Surface Mount Magnetic Contacts Screw Terminals

Architects and Engineering Specifications

The 1285T Series contact shall be a magnetic reed contact switch. Lead connection to contact shall be through No. 6 screw terminals angled 45° to provide easy access. A plastic cover shall be provided to protect the screw terminals and to discourage tampering. The contact shall be 2.54" (6.51 cm) W x 0.545" (1.39 cm) L x 0.690" (1.77 cm) D. The magnet shall be 1.74" (4.45 cm) L x 0.595" (1.52 cm) W x 0.545" (1.39 cm) D. Mounting holes shall be on 2.094" (5.33 cm) centers. Lock-pin spacers shall be provided that lock into the base of the contact and magnet, and which lock together to raise the contact or magnet from the surface for optimal alignment. Color shall be natural or mahogany brown.

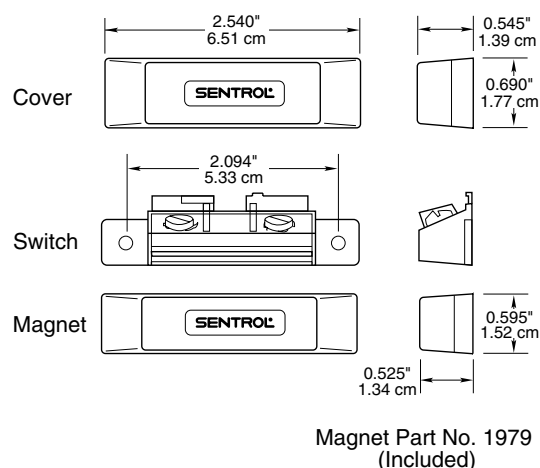

Installation Instructions

~~1285T, 1286T, 1287T, 1282TW, 1283TW, 1284TW, 1285TW, 1286TW, 1287TW~~

Select desired mounting positions for contact and magnet. IMPORTANT: Align contact and magnet as directed on magnet base (switches are polarity sensitive). Attach contact and magnet to surface. Wire leads to terminals. Snap on cover.

1287TH

Mount contact in desired location. Attach ohmmeter to "closed" loop and "common" terminals. Meter should read INFINITY with magnet away from contact. Match up contact and magnet alignment arrows. Bring magnet toward contact until meter reads 0 ohms. Mark this point and continue bringing magnet towards contact until meter again reads INFINITY. Mark this point, and position the magnet between these two marks. With magnet positioned correctly, contact shall have balanced operation and will be more difficult to defeat if an external magnet is used in such an attempt.

Specifications:

Form A (~~1282TW, 1285T, 1285TW~~)

Voltage: 100 V AC/DC max
Current: 0.5 A max
Power: 7.5 W max

Form B (~~1283TW, 1286T, 1286TW~~)

~~Voltage: 30 V AC/DC max~~
~~Current: 0.25 A max~~
~~Power: 3.0 W max~~

Form C (~~1284TW, 1287T, 1287TW, 1287TH~~)

Voltage: 30 V AC/DC max
Current: 0.25 A max
Power: 3.0 W max

Ordering Information

Model Number	Loop Type	Electrical Configuration	Color Choices	Gap Distance*	Lead Type	Listing
1282TW	Closed	N/O	Natural or mahogany brown	Up to 2"	#6 screw terminal	UL/ULC
1283TW	Open	N/C	Natural or mahogany brown	Up to 2"	#6 screw terminal	UL/ULC
1284TW	Open or Closed	SPDT	Natural or mahogany brown	Up to 2"	#6 screw terminal	UL/ULC
1285T	Closed	N/O	Natural or mahogany brown	Up to 3/4"	#6 screw terminal	UL/ULC
1285TW	Closed	N/O	Natural or mahogany brown	Up to 1 1/2"	#6 screw terminal	UL/ULC
1286T	Open	N/C	Natural or mahogany brown	Up to 3/4"	#6 screw terminal	UL/ULC
1286TW	Open	N/C	Natural or mahogany brown	Up to 1 1/2"	#6 screw terminal	UL/ULC
1287T	Open or Closed	SPDT	Natural or mahogany brown	Up to 3/4"	#6 screw terminal	UL/ULC
1287TW	Open or Closed	SPDT	Natural or mahogany brown	Up to 1 1/2"	#6 screw terminal	UL/ULC
1287TH	Open or Closed	SPDT	Natural or mahogany brown	3/8" min., 1 1/4" max.	#6 screw terminal	UL/ULC

NOTE:

* Gap distances are nominal make distance $\pm 20\%$.
Gap specifications are for switch to make. Break distance is approximately 1.1 to 1.5 times make.



SENTROL

CORPORATE HEADQUARTERS

12345 SW Leveton Dr., Tualatin, OR 97062
Tel.: 503.692.4052 Fax: 503.691.7566
<http://www.sentrol.com>

U.S. & Canada: 800.547.2556
Technical Service: 800.648.7424
FaxBack: 800.483.2495

Sentrol reserves the right
to change specifications
without notice.

©1999 Sentrol