

# SSC-CB564R/CB574R

Analog Color Fixed Cameras

**SONY**

make.believe


## 700 TV Line Security Cameras with IR Illuminators and IP66 Housing

- Horizontal resolution of 700 TV lines (sharp mode)
- High sensitivity
- Built-in IR illuminators
- Optical Day/Night function
- IP66-rated waterproof and dust-tight feature



### KEY FEATURES

- Built-in IR (infrared) illuminators to assist capturing objects in the dark even under 0 lx, up to 98 feet (30 m) away



OFF



ON

- High resolution (700 horizontal TV lines in sharp mode) and high sensitivity (Color: 0.06 lx\*, B/W: 0 lx, F1.2, 50 IRE) achieved by an 1/3-type EXview HAD™ CCD II sensor and Sony's new digital signal processor, Effio-E™
- IP66-rated waterproof and dust-tight feature for outdoor surveillance, or indoor where water ingress may pose an issue\*\*

**EXviewHAD CCD II™**

\*\* Based on Sony internal testing. Actual performance may vary based on environmental conditions and usage.

- Optical Day/Night function to switch to Day or Night mode depending on the light level
- Dip switch control for easy mode setting



- ATR-Lite (Adaptive Tone Reproduction Lite) to compensate for gradation of subjects to an optimum level
- iBLC to compensate for exposure levels in dark scenes to improve subject visibility
- ATW (Automatic Tracing White) balance which automatically adjusts the camera's white balance to adapt to sudden changes in lighting conditions
- Internal lock, and line lock selectable
- 2D noise reduction employed
- AC 24 V/DC 12 V operation (±10 %)

\* For SSC-CB564R only.

## SPECIFICATIONS

	SSC-CB564R	SSC-CB574R
<b>Camera</b>		
Image device	1/3-type EXview HAD CCD II	
Number of effective pixels (H x V)	480,000 pixels (976 x 494)	
Signal system	NTSC standard	
Horizontal resolution	700 TV lines (sharp mode)	
S/N ratio	More than 55 dB (AGC Off)	
Minimum illumination	Color: 0.06 lx, B/W: 0 lx (F1.2, 50 IRE) Color: 0.04 lx, B/W: 0 lx (F1.2, 30 IRE)	Color: 0.09 lx, B/W: 0 lx (F1.2, 50 IRE) Color: 0.05 lx, B/W: 0 lx (F1.2, 30 IRE)
Video output	VBS: 1.0 Vp-p	
Synchronization	Internal/AC line lock selectable	
Gain control	Auto (On/Off)	
White balance	ATW (2000K to 10000K), ATW-PRO (2500K to 6000K)	
Lens type	Built-in variable focal lens	
Zoom ratio	Optical 3.7x	Optical 2.4x
Horizontal viewing angle	101.8 degrees to 27.4 degrees	32.1 degrees to 13.1 degrees
Focal length	f=2.8 mm to 10.5 mm	f=9 mm to 22 mm
F number	F1.2 (Wide), F2.7 (Tele)	F1.4 (Wide), F1.6 (Tele)
Minimum object distance	11 7/8 inches (300 mm)	39 3/8 inches (1000 mm)
<b>Camera Features</b>		
Day/Night	Yes (removable IRC filter)	
IR working distance	30 m (98 feet) (50 IRE)	
Noise reduction	Yes (2D NR)	
Back light compensation	Yes (iBLC, On/Off)	
Automatic tone reproduction	Yes (ATR-Lite, On/Off)	
<b>General</b>		
Weight	1 lb 7 oz (650 g)	
Dimensions	ø3 1/8 inches x 4 3/8 inches (ø77 mm x 110 mm)	
Power requirement	AC 24 V ±10%, DC 12 V ±10%	
Power consumption	Max. 5.5 W	
Operating temperature	14 °F to 122 °F (-10 °C to +50 °C)	
Storage temperature	-40 °F to +140 °F (-40 °C to +60 °C)	
Operating humidity	20% to 80%	
Storage humidity	20% to 95%	
Ingress Protection	IP66	
Supplied accessories	Template x1, Fall-prevention rope x1, Screw (M4 x 8) x1, Wrench x1, Installation manual x1	

## DIMENSIONS

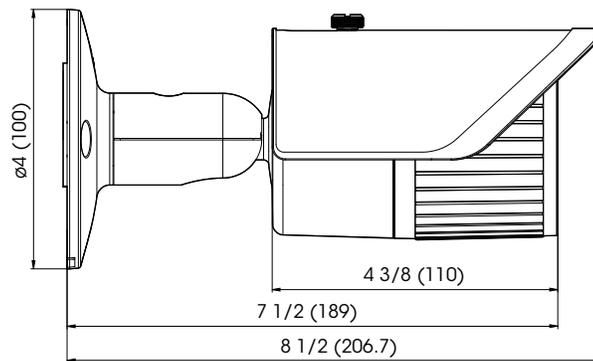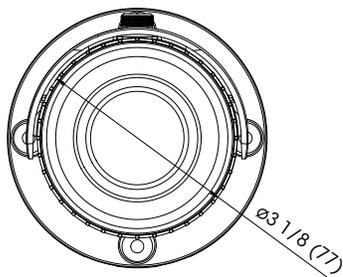

Unit: inches (mm)

© 2011 Sony Electronics Inc. All rights reserved.  
 Reproduction in whole or in part without written permission is prohibited.  
 Features and specifications are subject to change without notice.  
 Weights and measurements are approximate and may vary.  
 Sony, Effio-E, EXview HAD and the Sony make.believe logo are trademarks of Sony.  
 All other trademarks are the trademarks of their respective owners.