


ARMORLITE® TYPE MC

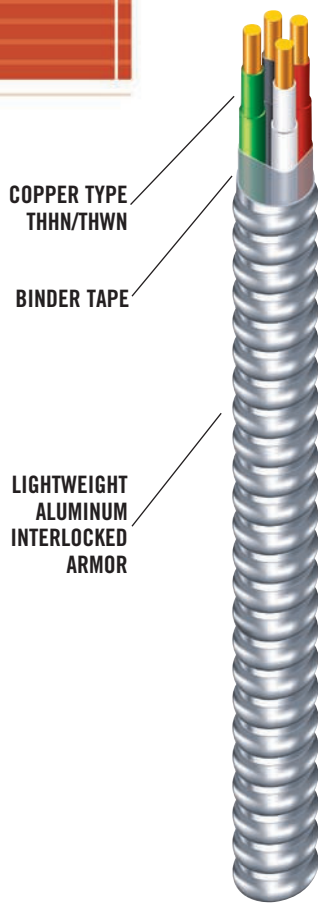

Lightweight Aluminum
Interlocked Armor

600 Volt

Copper Power
Conductors

THHN/THWN Insulated
Singles

Green Insulated
Grounding Conductor

Sizes 14 AWG through
2 AWG

Rated VW-1

APPLICATIONS Suitable for use as follows:

- Branch, feeder and service power distribution in commercial, industrial, institutional, and multi-residential buildings
- Power, lighting, control, and signal circuits
- Fished or embedded in plaster
- Concealed or exposed installations
- Environmental air-handling spaces per NEC 300.22(C)
- Places of Assembly per NEC 518.4 and theaters per NEC 520.5
- As aerial cable on a messenger
- Installation in cable tray and approved raceways
- Under raised floors for information technology equipment conductors and cables per NEC 645.5(D) & 645.5(D)(2)
- Class I Div. 2, Class II Div. 2, & Class III Div. 1 Hazardous Locations

STANDARDS & REFERENCES

- Southwire Armorlite® Type MC Cable meets or exceeds the requirements of UL Standard 83, UL Standard 1063, UL Standard 1569 for Type MC, Federal Specification A-A59544 (formerly J-C-30B), IEEE 1202 (70,000 BTU/hr) Vertical Cable Tray Flame Test, and the National Electrical Code
- Southwire Armorlite® Type MC Cable is listed for use in UL 1, 2, and 3 Hour Through-Penetration Firestop Systems

CONSTRUCTION


- Southwire Armorlite® Type MC Cable is constructed with soft-drawn copper, Type THHN/THWN conductors rated 90°C dry/ 75°C wet, available in sizes 14 AWG through 750 kcmil, and a green insulated grounding conductor (sizes 1/0 AWG and larger furnished with bare grounding conductor)
- The conductors are cabled together and a binder tape bearing the print legend is wrapped around the assembly
- Aluminum interlocked armor is applied over the assembly. Refer to color chart for conductor color sequence

FEATURES

- Reduces installation costs up to 50% over pipe and wire
- Lightweight aluminum armor—as much as 45% lighter than steel MC Cable
- UL Classified 1, 2, and 3 Hour Through-Penetration Firestop Systems: W-J-3037, W-L-3110, W-L-3113, W-L-3117, W-L-3120, W-L-3121, W-L-3160, C-AJ-3115, C-AJ-3140, C-AJ-3142, C-AJ-3145, C-AJ-3173, C-AJ-3202, C-AJ-4065, C-AJ-4066, F-C-3038
- Cable reverse wound on reel for ease of pulling and installation; when pulling from coils, pull from inside to ensure ease of installation

¹ 2005 Edition.





MC CABLE

ARMORLITE® TYPE MC

WEIGHTS, MEASUREMENTS AND PACKAGING

CONDUCTOR SIZE* (AWG)	CONDUCTOR TYPE	GROUNDING CONDUCTOR SIZE (AWG)**	OVERALL DIAMETER (inches)	WEIGHT (lbs./1000 ft.)	AMPACITY (AMPS)†			STANDARD PACKAGE	
					60°C	75°C	90°C	COIL (feet)	REEL (feet)
14/2	Solid	14	.439	78	15	15	15	250	1000
14/3	Solid	14	.464	96	15	15	15	250	1000
14/4	Solid	14	.494	114	15	15	15	250	1000
12/2	Stranded	12	.494	110	20	20	20	250	1000
12/2	Solid	12	.475	105	20	20	20	250	1000
12/3	Stranded	12	.527	137	20	20	20	250	1000
12/3	Solid	12	.505	131	20	20	20	250	1000
12/4	Stranded	12	.564	164	20	20	20	250	750
12/4	Solid	12	.539	157	20	20	20	250	750
10/2	Stranded	10	.566	159	30	30	30	250	750
10/2	Solid	10	.542	152	30	30	30	250	750
10/3	Solid	10	.580	193	30	30	30	250	500
10/4	Stranded	10	.653	243	30	30	30	250	500
10/4	Solid	10	.623	233	30	30	30	250	500
8/2	Stranded	10	.678	234	40	50	55	200	500
8/3	Stranded	10	.678	298	40	50	55	200	500
8/4	Stranded	10	.732	370	40	50	55	125	500
6/2	Stranded	8	.716	332	55	65	75	125	500
6/3	Stranded	8	.756	433	55	65	75	125	500
6/4	Stranded	8	.819	536	55	65	75	100	500
4/3	Stranded	8	.986	635	70	85	95	100	500
4/4	Stranded	8	1.077	799	70	85	95	100	500
3/3	Stranded	6	1.053	785	85	100	110	100	500
3/4	Stranded	6	1.152	987	85	100	110	100	500
2/3	Stranded	6	1.130	933	95	115	130	100	500
2/4	Stranded	6	1.239	1182	95	115	130	100	500

Note: Ampacities are based on Table 310.16 of the NEC, 2005 Edition.

†Allowable ampacities shown are for general use as specified by the National Electrical Code, 2005 Edition, Section 310.15.

If the equipment is marked for use at higher temperatures, the conductor ampacity shall be limited to the following per NEC 110.14(C):

60°C - When terminated to equipment for circuits rated 100 amperes or less or marked for size 14 through 1 AWG conductors.

75°C - When terminated to equipment for circuits rated over 100 amperes or marked for conductors larger than size 1 AWG.

90°C - For ampacity derating purposes.

Per NEC 310.15(B)(2)(a), the ampacity of 4/C cables shall be reduced by a factor of 0.80 when the neutral is considered a current-carrying conductor.

*Available in sizes up to 750 kcmil.

**All grounding conductors 8 AWG and larger will be stranded.

# OF CONDUCTORS	COLOR SEQUENCE	COLOR CODING
		120/208Y
2		white, black
3		white, black, red
4		white, black, red, blue
Grounding Conductor		green

Other special colors are available subject to economic order quantity.

# OF CONDUCTORS	COLOR SEQUENCE	COLOR CODING
		277/480Y
2		brown, grey
2		orange, grey
2		yellow, grey
2		purple, grey
3		brown, yellow, grey
3		brown, orange, grey
4		brown, orange, yellow, grey
4		brown, yellow, purple, grey
Grounding Conductor		green

ONLINE CERTIFICATIONS & TOOLS

- UL Online Certification Directory (www.ul.com)
- UL Online Product Guide Info - Metal-Clad Cable (PJAZ) (www.ul.com)

FULL ENGINEERING SPECIFICATIONS AVAILABLE AT WWW.SOUTHWIRE.COM/COMMERCIALPRODUCTSPECS