

Housing bulkhead mounting and power females for device integration

## Features

- HARTING PushPull technology
- Touch-proof
- Device side: male
  - Solder variant, angled and straight
- AIDA-conform (German Domestic Automobile Manufactures)

## Technical characteristics

Locking	PushPull technology
Degree of protection	IP 65 / IP 67
Number of contacts	4 + PE
Electrical data	16 A 24 V 4 kV
acc. to DIN EN 61 984	Male insert with solder termination
Termination	min. 500
Mating cycles	-40 °C ... +70 °C
Temperature range	Zinc die-cast, nickel plated
Housing material	Plastic, black (female)

### Identification

### Part No.


### Drawing

### Dimensions in mm

#### Components device side


Housing bulkhead mounting metal

09 35 004 0301

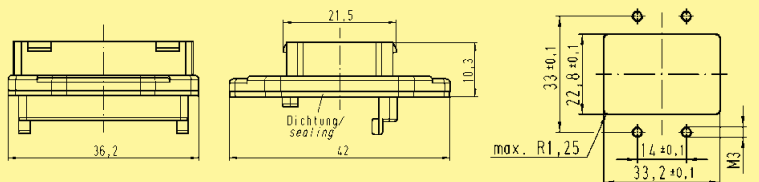


Male insert with solder termination angled

09 35 004 3003

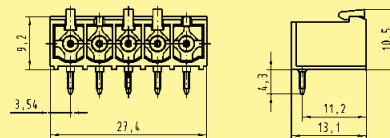

Male insert with solder termination straight


09 35 004 3004



Panel feed-through, metal

incl. housing and male insert with spring force connection

09 35 431 0311

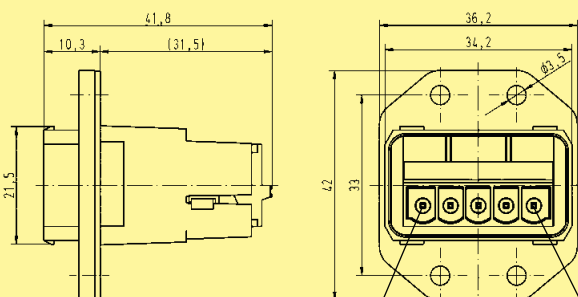

Protection cover IP 65 / IP 67

09 35 004 5401

Pin 1 Pin 5