HARAX® M12-L

3-poles with pre-leading contact



3-poles



4-poles



Identification	Part No. Male	Part No. Female	Drawing	Dimensions in mm
***HARAX*® M12-L, unshielded**				
3-poles, A-coded, with pre-leading contact (assignment 3, 4, 5)	21 03 212 1400		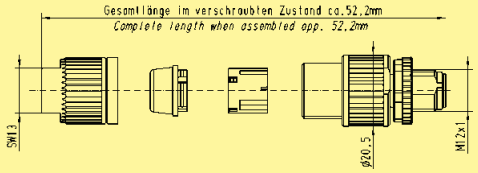	
3-poles, A-coded (assignment 1, 3, 4)	21 03 212 1306			
4-poles, A-coded (assignment 1, 2, 3, 4)	**21 03 212 1305**			
4-poles, A-coded, to 2.6 mm core diameter (assignment 1, 2, 3, 4)	21 03 212 1407			
0.34 - 0.75 mm² AWG 22 - 18			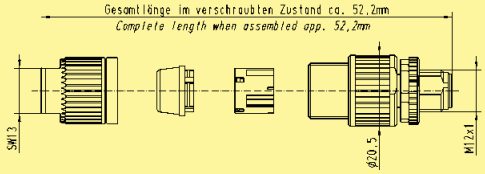	
3-poles, A-coded (assignment 3, 4, 5)		21 03 212 2400	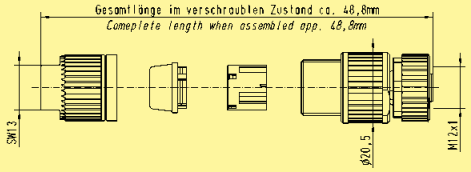	
3-poles, A-coded (assignment 1, 3, 4)		21 03 212 2306		
4-poles, A-coded (assignment 1, 2, 3, 4)		**21 03 212 2305**		
4-poles, A-coded, to 2.6 mm core diameter (assignment 1, 2, 3, 4)		21 03 212 2407		
0.34 - 0.75 mm² AWG 22 - 18			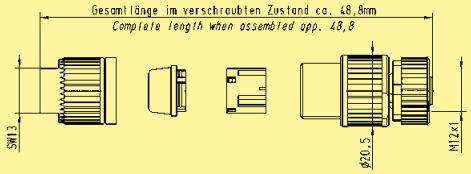	
***HARAX*® M12-L, unshielded**				
5-poles, A-coded	**21 03 272 1505**	**21 03 272 2505**	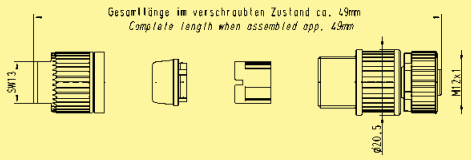	
0.34 - 0.5 mm² AWG 22 - 20				
Cable diameter: 6 - 8 mm				
***HARAX*® M12-XL, unshielded**				
5-poles, A-coded	**21 03 216 1505**	**21 03 216 2505**	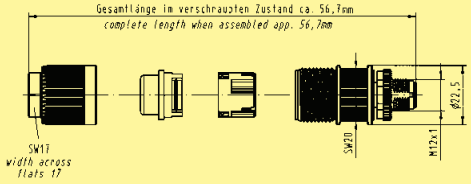	
0.5 - 1 mm² AWG 20 - 18				
Cable diameter: 6 - 9 mm				

Stock items in bold type