
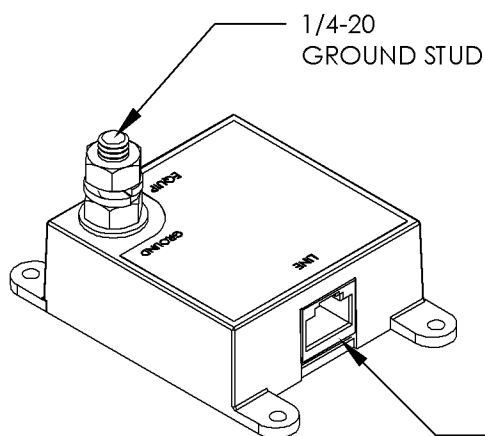
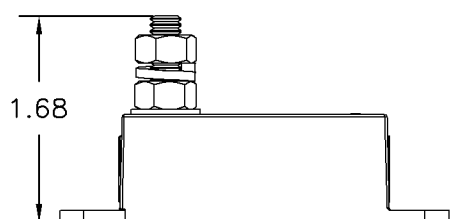


THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

# REVISIONS

LTR	DESCRIPTION	ECN NO.	DATE	APPROVED
A	PRODUCTION RELEASE	DD41605	5/13/09	JDW
B	ADD RoHS AND UL	8657	3/2/10	DWR

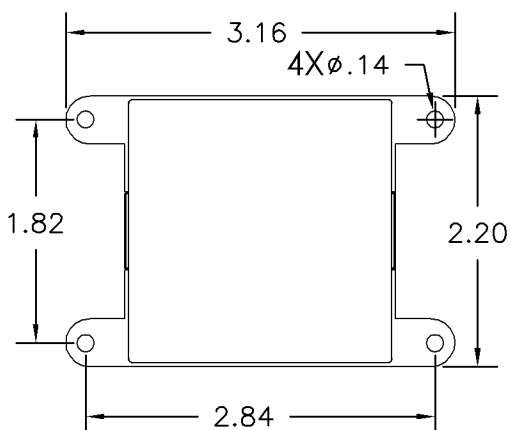

PART NUMBER 1101-994

DATA RATE: 1000 BASE T. (THROUGHPUT AND O PACKET LOSS TESTED WITH 100 METERS OF CABLE).

PAIRS PROTECTED 1/2, 4/5, 3/6, 7/8  
PINS PROTECTED: ALL L-L & L-G

TURN ON VOLTAGE: 150V L-L, L-G

SERIES RESISTANCE: <1 OHM

TYPICAL CAPACITANCE: <2 pF ALL MODES

MAX SURGE:

20kA 8/20µS (IEC 6100-4-5), L-L, L-G

1000A 10/1000µS (BELL CORE 1089) L-L, L-G

DC HOLDOVER VOLTAGE: 80V

HUMIDITY: 0 TO 100% CONDENSING

TEMPERATURE: -40°C TO +85°C  
STORAGE/OPERATING

APPLICATION INDOOR, RJ45, STP


RoHS COMPLIANT  
UL 497B LISTED

ALL DIMENSIONS IN INCHES  
UNLESS OTHERWISE SPECIFIED.

TOLERANCES:  
FRACTIONS= ±  
ANGLES= ± °  
XX= ±  
XXX= ±

MATERIAL:

THIRD-ANGLE PROJECTION



DRAWN	JDW	DATE	4/21/09
CHECKED	HMB		5/1/09
ENG APPD	SEH		5/5/09
PROJ APPD	JDW		5/6/09
PROJECT NO.	DD41605		

NOTICE: THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF TRANSTECTOR SYSTEMS. ALL RIGHTS RESERVED.



©2009 Transtector Systems, Inc. All rights reserved.

10701 Airport Drive, Hayden, ID 83835, USA  
+1.208.772.8515 FAX +1.208.762.6034  
800.882.9110 www.transtector.com

TITLE

## SPECIFICATION TSJ GIG-E POE SHIELDED JACKS

SIZE	CAGE	DRAWING NUMBER	REV
A	30992	1400-674	B
SCALE= NA		SHEET 1 of 1	