


Ribbon Cable, Riser

144 F, Single-mode (OS2)

CORNING

Corning Cable Systems Ribbon Riser Cables are all-dielectric and designed for indoor use. The optical fibers are organized into easily identifiable 12-fiber ribbons inside a central tube. The required tensile strength is provided by dielectric strength elements that are helically stranded around the central tube. The specially formulated, flame-retardant outer jacket and rugged construction of these cables facilitates routing through riser shafts and long horizontal runs inside buildings. These cables are tested using the UL 1666 flame test, meet the application requirements of the National Electrical Code® (NEC®) and are OFNR and FT-4 listed.

This cable is available in 12 different jacket colors - blue, orange, green, brown, slate, white, red, black, yellow, purple, rose and aqua. The colored jacket allows for easy visual identification of the cables. The standard jacket color will be determined by the dominant fiber type in the cable and will use the standard part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.

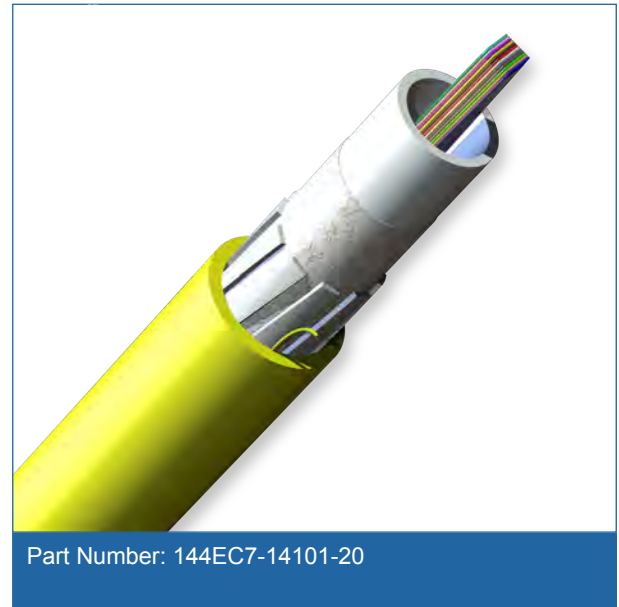

Features and Benefits

Precise fiber and ribbon geometries

Excellent mass splicing yields

Gel-free waterblocking technology


Craft-friendly cable preparation

Innovative waterblocking technology

Prevents water penetration

Flame-retardant jacket

Rugged and durable

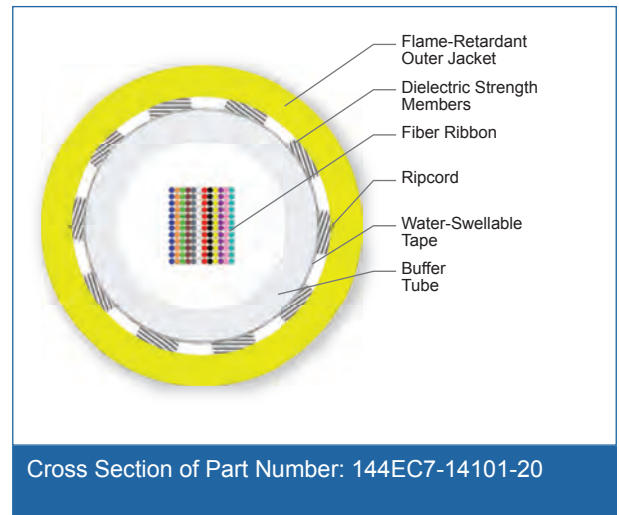

Standards

Approval and Listings

National Electrical Code® (NEC®) OFNR, CSA OFN FT-4

Common Installations

Indoor vertical riser and general purpose horizontal according to NEC Article 770

Design and Test Criteria

ANSI/ICEA S-83-596

CORNING

Ribbon Cable, Riser

144 F, Single-mode (OS2)

CORNING

Specifications

General Specifications	
Environment	Indoor
Application	General Purpose Horizontal, Vertical Riser
Cable Type	Ribbon
Product Type	Distribution
Flame Rating	Riser (OFNR)
Fiber Category	Single-mode (OS2)

Temperature Range	
Storage	-40 °C up 70 °C (-40 °F up 158 °F)
Installation	-10 °C up 60 °C (14 °F up 140 °F)
Operation	-20 °C up 70 °C (-4 °F up 158 °F)

Cable Design	
Fiber Count	144
Ribbons per Tube	12
Fibers per Ribbon	12
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Buffer Tube Color	Natural
Buffer Tube Diameter	11 mm (0.43 in)
Tape	Water-swellable
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Number of Ripcords	2
Outer Jacket Material	Flame-retardant
Outer Jacket Color	Yellow

Mechanical Characteristics Cable	
Max. Tensile Strengths, Short-Term	1320 N (300 lbf)
Max. Tensile Strengths, Long-Term	400 N (90 lbf)
Weight	183 kg/km (123 lb/1000 ft)
Nominal Outer Diameter	15.2 mm (0.6 in)

Ribbon Cable, Riser

144 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Min. Bend Radius Installation	228 mm (9 in)
Min. Bend Radius Operation	152 mm (6 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Type	Single-mode
Fiber Core Diameter	8.2 μ m
Fiber Category	OS2
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Serial 1 Gigabit Ethernet	5000 m / - / -
Serial 10 Gigabit Ethernet	10000 m / - / 40000 m

* ITU-T G.652 D compliant.

* Meets 0.75 ns optical skew when used in all Corning Cable Systems Plug & Play™/Pretium EDGE® Systems Solutions.

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Cable Systems Customer Care Representative for additional information.

Ordering Information

Part Number	144EC7-14101-20
Product Description	Ribbon Cable, Riser, 144 F, Single-mode (OS2)

Ribbon Cable, Riser

144 F, Single-mode (OS2)

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

Notes



Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/cablesystems

A complete listing of the trademarks of Corning Cable Systems is available at www.corning.com/cablesystems/trademarks.

Corning Cable Systems is ISO 9001 certified. © 2012 Corning Cable Systems. All rights reserved.