

## CADDY<sup>®</sup> CAT HP J-Hook Tree, Ceiling Mount – CAT64HPDCM3 (181058)





- Ideal for attaching to concrete, steel or wood surfaces
- Provides optimal support for high-performance data cable, up to and including Cat 5e, Cat 6, Cat 6A, Cat 7 and fibre optic
- Ready to use out of the box, saving installation time and labor
- Requires no screws, rivets or special tools for assembly
- Single- or double-sided tree configurations provide multiple J-Hooks with one structural attachment
- Provides superior fill capacity and load rating over most other non-continuous cable support alternatives
- Meets ISO<sup>®</sup>/IEC<sup>™</sup> 14763-2, TIA<sup>™</sup> 568-C and TIA<sup>™</sup> 569-C



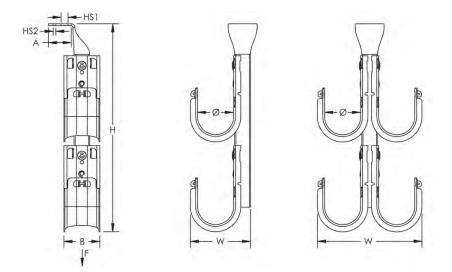

Part Number	CAT64HPDCM3
Article Number	181058
Material	Steel
Finish	Pre-galvanized
Туре	Double Sided
Diameter (Ø)	4" 100 mm
Tiers	3
Height (H)	22 3/4" 578 mm
Width (W)	10" 254 mm
Hole Size 1 (HS1)	0.405 " 10.3 mm
Hole Size 2 (HS2)	0.185" 4.7 mm
A	1 7/16"





Part Number	CAT64HPDCM3
	36.5 mm
В	2" 50 mm
Static Load 1 (F1)	360 lb 1,620 N
Static Load 2 (F2)	180 lb 810 N
Standard Packaging Quantity	5 pc
UPC	78285679936
UNSPSC	39131709
Approvals	cULus®

Static loads represent maximum load limit of J-Hook tree. Static load limit of each J-Hook is 60 lb (270 N).

Refer to Static Load 1 when fastening J-Hook tree using Hole Size 1. Refer to Static Load 2 when fastening J-Hook tree using Hole Size 2.

Non-continuous supports may not exceed spacing of 5' (1.5 m) per TIA<sup>SM</sup> 569-C.9.7.

cULus is a registered certification mark of UL LLC. IEC is a registered service mark of Independent Electrical Contractors, Inc. ISO is a registered trademark of International Organization for Standardization. TIA is a registered service mark of the Telecommunications Industry Association.

WARNING

ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

Copyright © 2013 ERICO International Corporation. All rights reserved. CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.



