

# Net-Access™ S-Type Cabinets – 48 RU

## specifications

The Net-Access™ S-Type Cabinets shall consist of metal frames available in 600mm (23.6"), 700mm (27.6"), and 800mm (31.5") widths, 1067mm (42.0") and 1219mm (48.0") depths, and multiple heights. The top of cabinet includes molded edge protection and snap-in covers, and pre-installed in cable entry openings to prevent air leakage. Cabinets shall include front single hinge doors with 69% open perforation and rear perforated or solid split doors. Cabinets shall have rails with provisions for rear cable management fingers (some finger sold separately) or to accept Zero RU QuickNet™ Style Inserts. The entire cabinet shall be fully electrically bonded, including equipment rails, door, and side panels. Single point bonding locations shall be available at the top and bottom of each cabinet. Cabinets shall have a 1360kg (3000 lbs.) load rating and 1133kg (2500 lbs.) rolling load rating.



## technical information

<b>Dimensions:</b>	48 RU – 600mm W (23.6") x 1067mm D (42.0") x 2292mm H (90.3")
	48 RU – 600mm W (23.6") x 1219mm D (48.0") x 2292mm H (90.3")
	48 RU – 700mm W (27.6") x 1067mm D (42.0") x 2292mm H (90.3")
	48 RU – 700mm W (27.6") x 1219mm D (48.0") x 2292mm H (90.3")
	48 RU – 800mm W (31.5") x 1067mm D (42.0") x 2292mm H (90.3")
	48 RU – 800mm W (31.5") x 1219mm D (48.0") x 2292mm H (90.3")
<b>Rail span by cabinet depth:</b>	1067mm (42"): 32mm – 439mm, and 524mm – 932mm (1.3" – 17.3" and 20.6" – 36.7") 1219mm (48"): 32mm – 515mm, and 600mm – 1084mm (1.3" – 20.3" and 23.6" – 42.7")
<b>Material:</b>	Steel with durable black polyester epoxy powder coat finish
<b>Compliance:</b>	EIA-310-D TIA/EIA-942
<b>Packaging:</b>	Cabinet ships assembled, one per pallet

## key features and benefits

<b>Versatility</b>	Wide range of cabinet designs available for specific thermal applications, resulting in improved thermal efficiencies and reductions in energy expenditures
<b>Thermal efficiency</b>	Integral blanking panels and cabinet sealing features reduce bypass air and mixing of cold air and exhaust air within the cabinet for improved thermal efficiency
<b>Total air sealing</b>	Panduit cabinets, thermal ducting, cool boot product, blanking panels, blanking foam strips, and blanking shade provide a complete thermal and sealing solution (parts sold separately)
<b>Aesthetics</b>	N-Type and S-Type cabinets can be ganged together for complete streamlined appearance improving data center aesthetics
<b>Rapid deployment</b>	Integrated casters to provide easy roll off on flat top pallets. Cable management ready rails included help speed deployment; easily adjustable rails can be quickly repositioned; heavy duty leveling legs can be accessed from top or bottom for faster deployment
<b>Bonding</b>	Cabinets and accessories are single-point bonded, providing a safe and reliable network while reducing installation costs
<b>Modular cable management fingers</b>	Provides bend radius control for each rack unit and can be positioned where required on cabinet posts for cable protection for increased network availability; provides design flexibility, scalability, and improved aesthetics for easier moves, adds and changes
<b>Expansive offering</b>	Multiple cabinet configurations for hot aisle/cold aisle, cold aisle containment, or vertical exhaust ducting deployments
<b>Durable coating</b>	Cabinets are powder coated in a durable polyester paint available in black (RAL9005), or white (RAL9003)

## applications

Net-Access™ S-Type Cabinets provide unparalleled value incorporating integral thermal sealing and cable management options that provide cost effective solutions to meet the diverse application needs of today's data centers. Complete range of sizes and seamless integration with Net-Contain™ VED and

Cold Aisle Containment Systems optimize thermal efficiency across virtually any data center application. Zero RU E-rail and outset cable entry enables vertical patching for 600mm (24") wide cabinets gaining up to 4 RU's per cabinet, optimizing cabinet and data center utilization.

### Net-Access™ S-Type Cabinets

#### 600mm x 48 RU x 1070mm

48 RU, single hinge perforated front door, rear perforated split doors, (2) side panels, casters, pou brackets, cage nut rails:	S6812*
48 RU, single hinge perforated front door, rear perforated split doors, (2) side panels, casters, pou brackets, cage nut rails, zero RU QuickNet™ Style Vertical Patching Panels:	S6812*P

#### 600mm x 48 RU x 1200mm

48 RU, single hinge perforated front door, rear perforated split doors, (2) side panels, casters, pou brackets, cage nut rails:	S6822*
48 RU, single hinge perforated front door, rear perforated split doors, (2) side panels, casters, pou brackets, cage nut rails, zero RU QuickNet™ Style Vertical Patching Panels:	S6822*P
48 RU, single hinge perforated front door, single solid rear door, casters, pou brackets, cage nut rails, vertical exhaust ready, front and rear floor seals:	S6829*V
48 RU, single hinge perforated front door, single solid rear door, (2) side panels, casters, pou brackets, cage nut rails, vertical exhaust ready, front and rear floor seals:	S6822*V

#### 700mm x 48 RU x 1070mm

48 RU, single hinge perforated front door, rear perforated split doors, (2) side panels, casters, pou brackets, cage nut rails:	S7812*
48 RU, single hinge perforated front door, rear perforated split doors, casters, pou brackets, cage nut rails:	S7819*

#### 700mm x 48 RU x 1200mm


48 RU, single hinge perforated front door, rear perforated split doors, (2) side panels, casters, pou brackets, cage nut rails:	S7822*
48 RU, single hinge perforated front door, rear perforated split doors, casters, pou brackets, cage nut rails:	S7829*
48 RU, single hinge perforated front door, single solid rear door, casters, pou brackets, cage nut rails, vertical exhaust ready, front and rear floor seals:	S7829*V
48 RU, single hinge perforated front door, single solid rear door, (2) side panels, casters, pou brackets, cage nut rails, vertical exhaust ready, front and rear floor seals:	S7822*V

#### 800mm x 48 RU x 1070mm

48 RU, single hinge perforated front door, rear perforated split doors, (2) side panels, casters, pou brackets, cage nut rails:	S8812*
48 RU, single hinge perforated front door, rear perforated split doors, casters, pou brackets, cage nut rails:	S8819*

# Net-Access™ S-Type Cabinets – 48 RU

## 48 RU Cabinet Dimensions

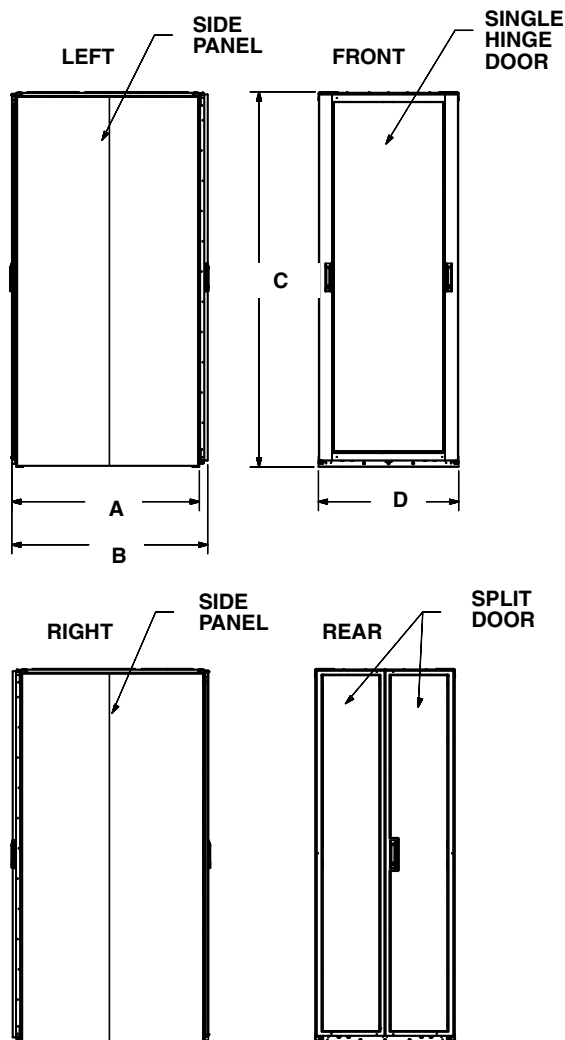

Cabinet Depth	Dimension A	Dimension B	Dimension C	Dimension D
1070mm	1067mm (42.0")	1115mm (43.9")	2292mm (90.3")	598mm (23.5") 698mm (27.5") 798mm (31.4")
1200mm	1219mm (48.0")	1267mm (49.9")	2292mm (90.3")	598mm (23.5") 698mm (27.5") 798mm (31.4")

Dimensions are in metric. (Dimensions in parenthesis are inches).

### 800mm x 48 RU x 1200mm

48 RU, single hinge perforated front door, rear perforated split doors, (2) side panels, casters, pou brackets, cage nut rails: S8822\*

48 RU, single hinge perforated front door, rear perforated split doors, casters, pou brackets, cage nut rails: S8829\*

48 RU, single hinge perforated front door, single solid rear door, casters, pou brackets, cage nut rails, vertical exhaust ready, front and rear floor seals: S8829\*V

45 RU, single hinge perforated front door, single solid rear door, (2) side panels, casters, pou brackets, cage nut rails, vertical exhaust ready, front and rear floor seals: S8822\*V

### Accessories

D-ring kit for full length POU bracket 25mm (1 inch) deep: S1DR

D-ring kit for full length POU bracket 60mm (2.4 inch) deep: S2DR

L-ring kit for full length POU bracket 40mm (1.6 inch) deep: S1LR

L-ring kit for full length POU bracket 70mm (2.8 inch) deep: S2LR

48 RU 1070mm standard side panel – black: S81SPSE

48 RU 1070mm standard side panel – white: S81SPSEW

48 RU 1200mm standard side panel – black: S82SPSE

48 RU 1200mm standard side panel – white: S82SPSEW

Casters: SCSTR4

48 RU finger kit – 100mm (4") long: SN15F

48 RU finger kit – 150mm (6") long: SN25F

Cool Boot® Cabinet Top Air Sealing Fitting for 6.5 x 6.5 cabinet top opening: CTGN6X6

Cool Boot® Cabinet Top Air Sealing Fitting for 3.5 x 5 cabinet top opening: CTGN3X5

Cool Boot® Cabinet Top Air Sealing Fitting for 1.5 x 5 cabinet top opening: CTGN1X5

Cabinet top cable protection bezel for 6.5 x 6.5 cabinet top opening: CTNBZL6X6

Cabinet top cover and cable protection bezel for 3.5 x 5 cabinet top opening: CTCN3X5

Cabinet top cover and cable protection bezel for 1.5 x 5 cabinet top opening: CTCN1X5

\*Indicates optional colors. Replace \* with:  
B = Black, W = White

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT®**

©2014 Panduit Corp.  
ALL RIGHTS RESERVED.  
RKSP95--WW-ENG  
1/2014