


single video receiver with  
automatic gain control (agc)



## Description

The ComNet™ FVR11 video receiver detects an AM video signal on one multimode fiber optic cable. The receiver utilizes Automatic Gain Control (AGC) and is compatible with the ComNet FVT11M and the FVT20 transmitters. Plug-and-play design ensures ease of installation requiring no electrical or optical adjustments. Bi-color (Red/Green) LED indicators are provided for rapidly ascertaining equipment operating status. Packaged in the exclusive ComNet ComFit housing, these units may be either wall or rack-mounted, or may be DIN-rail mounted by the addition of ComNet model DINBKT1 adaptor plate.

## Features

- AM Video Receiver
- NTSC, PAL, SECAM compatible
- Full range Automatic Gain Control (AGC)
- Voltage transient protection on all power and signal input output lines provides unconditional protection from power surges and other voltage transient events.
- Full color compatibility
- No in-field electrical or optical adjustments required
- Hot-swappable rack modules
- Interchangeable between stand-alone or rack mount use
  - ComFit
- Bi-Color (Red/Green) Video Present indicator
- Lifetime Warranty

## Applications

- CCTV (Fixed Video)



# FVR11

## specifications

### VIDEO

Video Output:	1 volt pk-pk (AGC controlled)
Bandwidth:	5 Hz - 10 MHz*
Differential Gain:	<5%
Differential Phase:	<5°
Tilt:	<1%
Signal-to-Noise Ratio (SNR):	>55 dB @ 10 dB Attn. >60 dB @ 7 dB Attn.
Max. RG-59 COAX Distance:	100m (300ft) Camera to Fiber Optic Module to maintain 6Mhz Bandwidth

### WAVELENGTH

FVR11	850 nm, Multimode
-------	-------------------

### NUMBER OF FIBERS

1

### CONNECTORS

Optical:	ST
Power:	Terminal Block
Video:	BNC (Gold Plated Center-Pin)

### LED INDICATORS

- Video present

### ELECTRICAL & MECHANICAL

Power:	8-15 VDC @ 60 mA
Surface Mount:	From Rack
Rack:	1
Number of Rack Slots:	Meets IPC Standard
Circuit Board:	6.1 × 5.3 × 1.1 in., (15.5 × 13.5 × 2.8 cm)
Size (in./cm) (L×W×H):	<2 lbs./0.9 kg
Surface Mount:	
Shipping Weight:	

### ENVIRONMENTAL

MTBF:	>100,000 hours
Operating Temp:	-40° C to +75° C
Storage Temp:	-40° C to +85° C
Relative Humidity:	0% to 95% (non-condensing) <sup>†</sup>

\* At 6 dB Attenuation

† May be extended to condensation conditions by adding suffix '/C' to model number for conformal coating.




MADE IN THE  
**USA**

PART NUMBER	DESCRIPTION	FIBERS REQUIRED	FIBER	OPTICAL PWR BUDGET	MAX. DISTANCE‡
FVR11	AGC Video Receiver (850 nm)	1	Multimode 62.5/125µm	14 dB	4 km (2.5 miles)
Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included)				
Options	Add '/C' for Conformally Coated Circuit Boards (Extra charge, consult factory)				
	DIN-Rail Mounting Adaptor Plate Kit – With mounting hardware (Optional, order model DINBKT1)				

‡ Distance may be limited by optical dispersion.

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J  
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

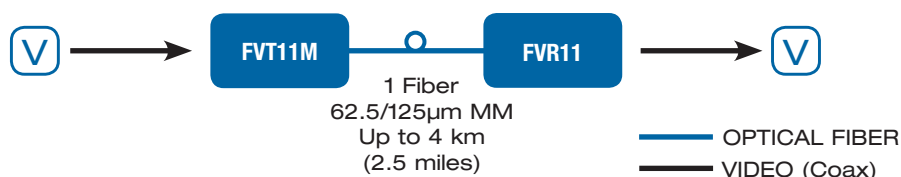

**comnet**  
Communication Networks

3 CORPORATE DRIVE | DANBURY, CT 06810 | USA  
T: 203.796.5300 | F: 203.796.5303 | TECH SUPPORT: 1.888.678.9427 | INFO@COMNET.NET  
8 TURNBERRY PARK ROAD | GILDERSOME | MORLEY | LEEDS, UK LS27 7LE  
T: +44 (0)113 307 6400 | F: +44 (0)113 253 7462 | INFO-EUROPE@COMNET.NET