

# pivCLASS® Authentication Module with Reader Services



## STRONG AUTHENTICATION AT THE DOOR

- **Enables upgrade to FIPS 201 compliance** – Upgrades any physical access control system (PACS) to achieve FIPS 201 compliance without the need to rip-and-replace the existing PACS.
- **Configurable Wiegand output format** – Matches PACS's desired format and bit length. Enables mandated PKI at the door without upgrading PACS controller or head-end software.
- **Validates PKI-based smart cards** – Authenticates PIV, PIV-I, CIV (a.k.a., PIV-C), TWIC, FRAC and CAC cards. Performs path validation and certificate revocation checking using CRL, OCSP or SCVP.
- **Meets regulatory requirements** – Enables facilities to authenticate PIV, PIV-I, CIV, TWIC, FRAC and CAC cards using single-, two- and three-factor authentication to meet all necessary authentication modes and assurance levels specified in NIST SP 800-116 and the TWIC Reader Specification.
- **Central management of authentication modes** – Enables dynamic control of authentication modes through the pivCLASS Reader Services.

HID Global pivCLASS® Government Solutions enable facilities to upgrade their existing physical access control system (PACS) to FIPS 201 compliance. The pivCLASS Authentication Module (PAM) is an embedded computer packaged in a small form factor with pre-installed, updatable firmware. The PAM is installed between a supported reader (such as an HID Global pivCLASS reader) and the existing access control panel, and provides configurable Wiegand output to the controller. This enables the system to be upgraded to support PIV cards for access control without replacing the existing access control panels.\*

pivCLASS Reader Services is used to configure and manage each connected PAM. It runs as part of the pivCLASS PACS Services and sets the PAM operating parameters (including authentication mode for each door, badge ID derivation rules and Wiegand formats). It can be used to dynamically change the authentication mode at each access point.

The PAM supports a range of commercially available contact, contactless and biometric readers, including an extensive line of Genuine

HID pivCLASS readers. Each PAM can process up to two readers at one or two doors. Readers pass card information to the PAM, which performs the required authentication to validate (or invalidate) the cardholder's credentials. If validated, the PAM derives and sends the badge ID to the access control panel for the access authorization decision. For invalid cards, the PAM can be configured to trigger an output relay and/or to send a preset badge ID to the PACS controller. pivCLASS Reader Services can also notify many PACS of invalid transactions via the PACS normal alarm queue.

Central management of authentication modes enables dynamic control of authentication modes through the pivCLASS Reader Services. Since the PAM regularly receives and caches card and cardholder status from the pivCLASS Reader Services, the result is nearly real-time PKI-based high security at the door.


In its role, the PAM does the "heavy lifting" of the PIV cardholder's credential validation each time a card is presented to a reader. Validation data is cached on the PAM, enabling it to function offline if required.

\*Much of the existing wiring may be reusable.

#### Additional Product Features:

- The PAM supports the pass through of legacy card identifiers (Prox, iCLASS®, DESFire®) for use in transitioning from these card types to FIPS 201 card types.
- The PAM uses a FIPS 140-2 Level 1 certified cryptographic module for all its crypto processing.
- The PAM supports up to two pivCLASS readers using a four-wire RS-485 connection per reader, typically enabling facilities to re-use much of their existing wiring.
- The PAM can be ordered with or without an enclosure.

#### pivCLASS® System Diagram

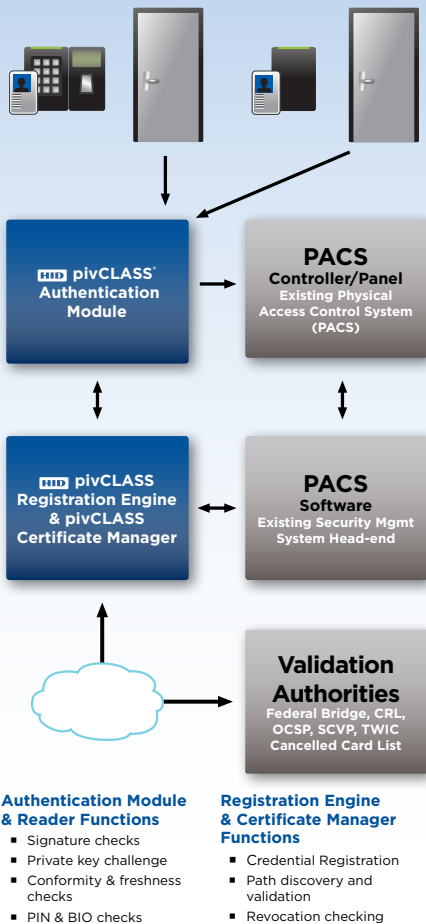

## SPECIFICATIONS

<b>HID Model Number</b>	M2000
<b>HID Part Number</b>	91000
<b>Dimensions, Board</b>	6.7" x 6.05" (17 cm x 15.4 cm)
<b>Dimensions, Enclosure (optional)</b>	7.4" x 6.7" x 1.3" (18.6 cm x 16.8 cm); mounting holes 7.05" x 6.35" (17.91 cm x 16.13 cm)
<b>Input Power</b>	12-24 VDC, 1.2 Amp - 600 mA
<b>Output Reader Power</b>	11.5 VDC, 300 mA (each)
<b>Battery</b>	Backup for real time clock
<b>Housing Color</b>	Gray
<b>Operating Temperature</b>	32°-120° F (0° - 49° C)
<b>Operating Humidity</b>	0% to 85% RHNC; indoor only
<b>INTERFACE TO READERS</b>	
<b>Number Channels</b>	Supports 1 or 2 readers at 1 or 2 doors
<b>Communication</b>	2 RS-485 serial ports
<b>Protocols</b>	CoreStreet Reader Protocol (CSRP), HID pivCLASS
<b>INTERFACE TO PACS CONTROLLER</b>	
<b>Number Channels</b>	Output for 1 or 2 readers
<b>Communication</b>	2 Wiegand ports
<b>INTERFACE TO PVS MANAGEMENT SYSTEM</b>	
<b>Protocol</b>	Ethernet TCP/IP
<b>Security</b>	Optional 256-bit AES encrypted Ethernet TCP/IP
<b>Initial Configuration Security</b>	Web interface enabled/disabled with DIP switch
<b>COMPLIANCE &amp; CERTIFICATION</b>	
<b>PVS Management Station Interface</b>	256-bit AES encryption
<b>Crypto Firmware</b>	FIPS 140-2 Level 1 certified
<b>Safety</b>	FCC, UL 294
<b>Module Warranty</b>	18 months
<b>OPERATIONAL</b>	
<b>Memory</b>	2GB SD flash memory card (standard)
<b>Number Cardholders</b>	Up to 100,000
<b>Firmware</b>	Centralized, automated management of PAM firmware updates is provided by pivCLASS Reader Services
<b>Relay Connectors</b>	2 configurable connectors for triggering optional auxiliary relay switches
<b>Diagnostic Console Port</b>	Enabled/disabled with DIP switch
<b>Status Indicators</b>	Color LEDs; power, tamper, reader online, fault, power failure
<b>Offline Operation</b>	Functions normally if communication to the pivCLASS Reader Services is interrupted
<b>Operation Interface</b>	Embedded browser-based interface for initial configuration, network settings and hardware options. Full PAM configuration and management via pivCLASS Reader Services.

North America: +1 949 732 2000  
Toll Free: 1 800 237 7769  
Europe, Middle East, Africa: +49 6123 791 0  
Asia Pacific: +852 3160 9800  
Latin America: +52 55 5081 1650

[hidglobal.com](http://hidglobal.com)

#### ASSA ABLOY

An ASSA ABLOY Group brand

© 2013 HID Global Corporation/ASSA ABLOY AB. All rights reserved. HID, HID Global, the HID Blue Brick logo, the Chain Design, iCLASS and pivCLASS are trademarks or registered trademarks of HID Global or its licensor(s)/supplier(s) in the US and other countries and may not be used without permission. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners.

2013-09-06-pivclass-authentication-module-ds-en