

NOTES, UNLESS OTHERWISE SPECIFIED:

TOOL WEIGHT: 1.70 lbs./ 0.77 Kg

ALL DIMENSIONS IN METRIC (mm)
[] DIMENSIONS IN INCHES


HANDLES TO SPRING RETURN FREELY
TO OPEN POSITION AFTER CRIMPING

TOOL FRAME MEMBERS AND FASTENERS
TO INCORPORATE BLACK OXIDE FINISH

RECOMMENDED LUBE FOR FRAME LINKAGE:

MOLYKOTE BR2 PLUS
(SUPPLIER, DOW CORNING)

AWG, mm² LETTERING AND ALL GUAGE
MARKINGS TO BE OF EQUAL SIZE OF
2.54[0.1] HEIGHT

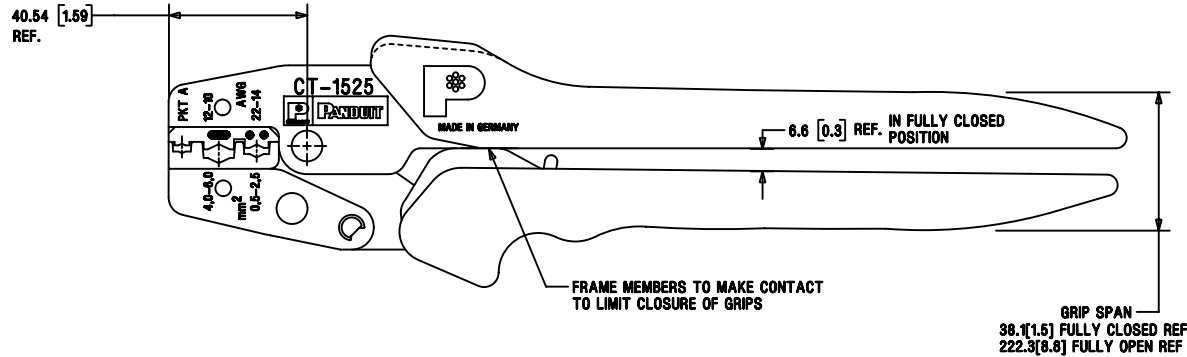

| | | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | R23624AA_TP23624C01.00 | |
| | | | | | | | | | | PANDUIT CORP. TINLEY PARK, ILLINOIS | |
| | | | | | | | | | | CD#CT-1525 | |
| | | | | | | | | | | UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: [.31] .50 [.31] .50 [.31] .50 | |
| | | | | | | | | | | UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION | |
| | | | | | | | | | | SCALE 1:1 | |
| | | | | | | | | | | SEE NOTES | |
| | | | | | | | | | | TP23624C01 | |
| | | | | | | | | | | C | |

| | | | | | | | | | | | | | | | | |
|-----|------|-----|---------------------|-------------|-----|-----|-------------|-----|------|-------------|-----|---|------|-----|------|------|
| 00 | ++0 | RBC | RLSD FOR PRODUCTION | 3788 | --- | JFL | DATE 6-9-98 | REV | DATE | DESCRIPTION | ECN | R | CUST | SLP | QMSH | DATE |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SLP | QMSH | DATE | ECN | R | CUST | SLP | QMSH | DATE |