

# Mini-Com® Faceplate Frames and Inserts

**PANDUIT®**

SpeCIFICatIon SheeT

## specifications

Faceplate frames shall be available in single and double gang versions and shall accept a variety of inserts. Executive design faceplate frames shall have a curved appearance and include labels and label covers. Classic design faceplate frames shall have a flush appearance and include color matched mounting screws. Inserts shall be available in sloped, sloped shuttered, and flat versions, and accept all modules for increased design flexibility. Modules shall be accessible from the front for easy moves, adds, and changes.



## technical information

<b>Mounting options:</b>	Faceplate frames are compatible with wall board adapters (MWBA1 and MWBA-2G); single or double junction boxes; raceway mounting brackets
<b>Packaging:</b>	Executive series faceplate frames include two labels, two label covers; all faceplate frames include 1" long #6-32 slotted pan head screws with non-threaded lead point

## key features and benefits

<b>Modular</b>	Faceplate frames accept all Panduit Inserts; inserts accept all Mini-Com® Modules for design flexibility
<b>Front access</b>	Mini-Com® Modules are accessible from the front for easy moves, adds, and changes
<b>Sloped versions</b>	Provide additional bend radius control to protect cable
<b>Shuttered versions</b>	Integrated shuttered door keeps dust and debris out of unmated Mini-Com® Jack Modules
<b>Identification</b>	Executive series faceplate frames can be clearly identified with labels; classic series faceplate frames can be clearly identified with optional adhesive labels; sloped shuttered version available with label option; Mini-Com® Modules can be clearly identified with optional icons

## applications

The combination of faceplate frames and inserts provide the design flexibility when installing connectivity in single or double gang junction boxes, wallboard adapters, and raceway mounting brackets. A variety of inserts enable front access to connectivity

for easy moves, adds, and changes. Sloped inserts are ideal for installations which require additional bend radius control and blank inserts allow for future growth. All inserts accept Mini-Com® Modules for copper, fiber, and audio/video applications.

### Mini-Com® Faceplate Frames and Inserts

#### Executive Series Faceplate Frames

<b>Single gang:</b>	CBE*Y
<b>Double gang:</b>	CBE*-2GY

#### Classic Series Faceplate Frames

<b>Single gang:</b>	CB*^
<b>Double gang:</b>	CB*-2G^

#### 1/2 Size Inserts

<b>Sloped:</b>	CHS2*-X
<b>Sloped, shuttered:</b>	CHS1S*-X
<b>Sloped, shuttered:</b>	CHS2S*-X
<b>Sloped, shuttered with labels:</b>	CHLS2S*-X
<b>Sloped, recessed:</b>	CHSRE2*-X
<b>Flat:</b>	CHF2*-X
<b>Blank:</b>	CHB2*-X

#### 1/3 Size Inserts

<b>Flat:</b>	CHF2M*-X
<b>Blank:</b>	CHB2M*-X

#### 2/3 Size Inserts

<b>Sloped, recessed:</b>	CHS2R2*-X
--------------------------	-----------

#### 1/3 Size D-Subminiature Inserts

<b>9-pin, female to female coupler:</b>	CHD9C*Y
<b>15-pin, female to female coupler:</b>	CHD15HDC*Y
<b>15-pin, DB connector mounted to a circuit board:</b>	CHD15HDSC*Y

#### RCA 1/3 Inserts

<b>Red, green, blue:</b>	CHR3RGB*
<b>White, yellow, red:</b>	CHR3WYR*

\*To designate color, add suffix IW (Off White), EI (Electric Ivory), IG (International Gray), AW (Arctic White), WH (White), or BL (Black).





^Frames CB\*\* and CB\*\*-2G require the following clearance when installing over a mud ring:  
CB\*\*=2.80"x1.74"  
CB\*\*-2G=2.83"x3.63"

Visit [www.panduit.com](http://www.panduit.com) for complete offering of copper, fiber, and audio/video modules.


# Mini-Com® Faceplate Frames and Inserts

## executive series faceplate frames


## classic series faceplate frames

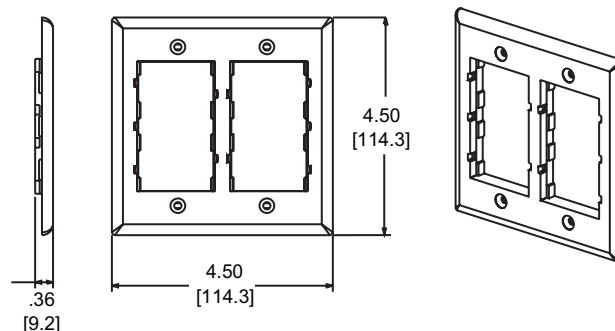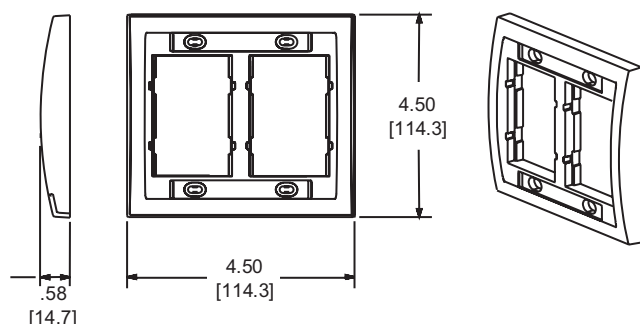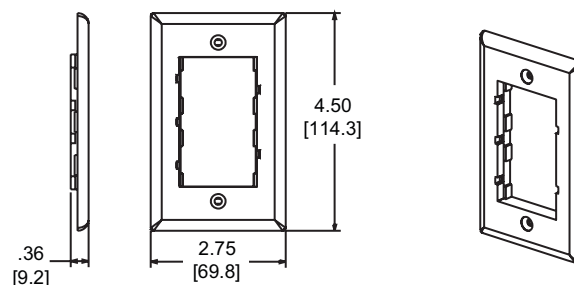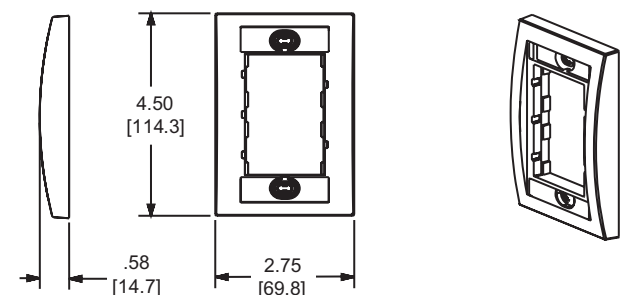


## inserts




**1/2 Sloped Insert**




**1/2 Sloped, Shuttered  
with or without Labels**




**1/2 Flat Insert**




**1/2 Sloped Recessed**




**1/2 Blank Insert**



**1/3 Flat Insert**



**1/3 Blank Insert**



**2/3 Sloped Recessed**

Dimensions are in inches [Dimensions in brackets are metric].

World Wide sUBsidi Aries AND sAlEs OFFiCes

PANdUit CANAdA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANdUit eUr OPe ltd .  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANdUit siNgAPOre Pte . ltd .  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANdUit JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANdUit l Ati N AMeri CA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANdUit AUstr Ali A Pt Y. ltd .  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT®**

©2014 Panduit Corp.  
All rights reserved.  
ot Sp38--WW-en G  
replaces WW-Ots P15  
8/2014