



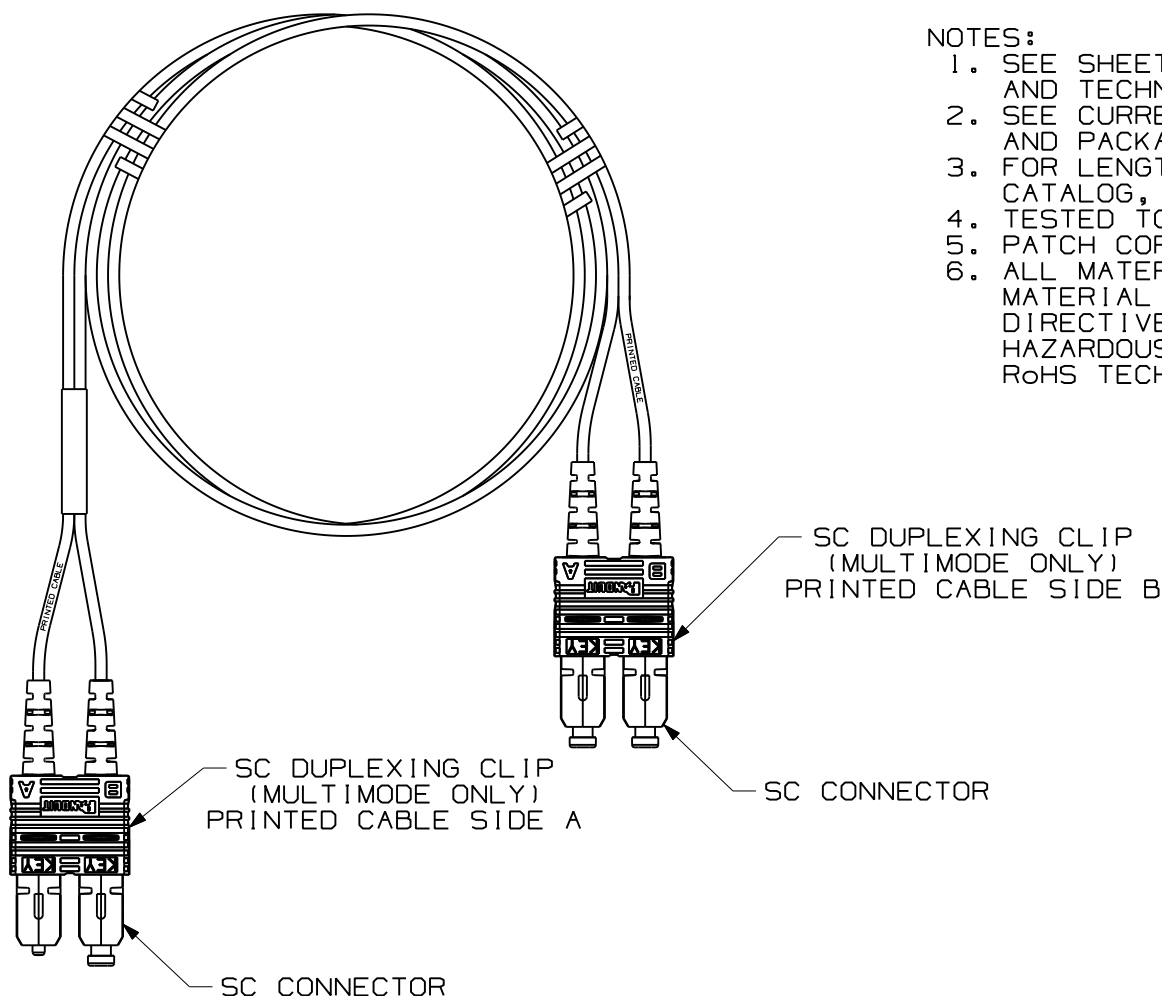

NOTES:

1. SEE SHEETS 2, 3 & 4 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

											FIBER OPTIC PATCH CORD DUPLEX SC TO SC CONFIGURATION CUSTOMER DRAWING			
												 PANDUIT TM CORP. TINLEY PARK, ILL 60477		
											 THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) ±.010 (0.3) (.XX) ±.03 (0.8) ANGLES	DRAWING FILENAME M02779BA_DC/00B	
												SCALE NONE		
											DRAWN BY MC	REVIEW DRAWING NUMBERS	PART NO. SEE SHEET 2, 3 & 4	
01	09-09-09	EFK		RELEASED TO PRODUCTION	02779-09						DATE 04-27-07		DRAWING NO. 02779-09 SHEET 1 OF 4	SIZE A
REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP	OTH	CHK'D RAF			



+



+

+