
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

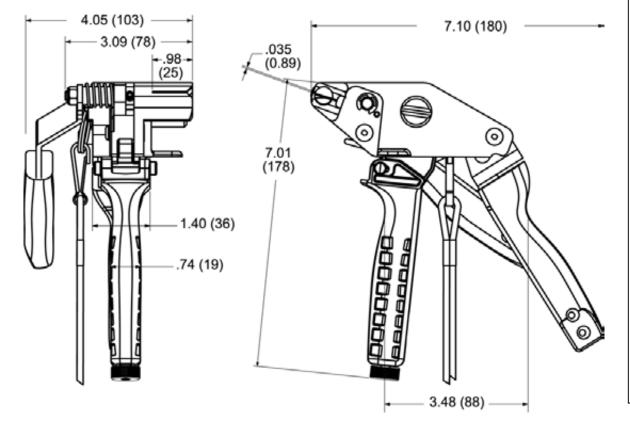

NOTES, UNLESS OTHERWISE SPECIFIED:

PANDUIT TOOL NUMBER RT2HT IS USED TO INSTALL COATED & UNCOATED PAN-STEEL MLTEH, MLTEH15 AND MLTSH TIES.

THIS TOOLS' FEATURES INCLUDE:

- Single handle trigger for fast installation
- Cable tie side entry for immediate positioning of tie and tool
- Adjustable controlled or Installer controlled tension
- Cut-off capability with the cutter and cutter handle
- Easy removal of excess tie
- Multi-position rear handle allows access to tight areas.
- Features to release & remove tie from tool before cutting.

CABLE TIE CROSS-SECTION CODE:

MLTEH MLTEH15 MLTSH

TOOL WEIGHT: 2.5 lbs. (40 oz.) Dimensions shown in parenthesis are metric.

F:\wrkgrp\rvusers\ENGR DOCS-NEW\ CUSTDWG/TM25754A01_00 RT2HT.doc

									P	ANDUIT COF	RP. TINLEY PARK, ILLINOI	S
									RT2F	IT CUSTON	IER DRAWING	G
									UNLESS OTHE DIMENSIONAL (.x) ±	UNLESS OTHERWIS SPECIFIED, ALL DIMEN ARE GIVEN IN INCHES,	DIMENSIONS ICHES, THIRD	
									(.xx) ±	ANGLES ±	ANGLE PROJECTION. SCALE	
									DRAWN BY: BLR	MATL:	NONE	
00	4-25-08	BLR	BJPU	RELEASED	4288		ABJ		DATE: 4-25-08	SHEET 1 OF 1	DRAWING NO.	DWG A
REV	DATE	ВҮ	CHK'D	DESCRIPTION	ECN	-R	CUST	SUP	CHK'D: BJPU		TM25754A01	SIZE