


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PLUG LENGTH CHART	
PORT	PLUG CORD LENGTH + 1" / -.5"
1 - 12	23.5" (596.9)

COIL DIAMETER CHART		
PART NUMBER	LENGTH	WEIGHT
UTPCH812PP25Y	8' (2438.4)	13.0 LBS./10 PCS. (3809 G/10 PCS)
UTPCH1012PP25Y	10' (3048)	16.25 LBS./10 PCS. (7386 G/10 PCS)
UTPCH1512PP25Y	15' (4572)	24.38 LBS./10 PCS. (11,082 G/10 PCS)
UTPCH2012PP25Y	20' (6096)	31.62 LBS./10 PCS. (14,373 G/10 PCS)
UTPCH612PP25Y	6' (1829)	9.75 LBS./10 PCS. (4423 G/10 PCS)

- NOTES:
1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
  2. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
  3. DIMENSIONS IN PARENTHESES ARE IN METRIC.
  4. MATES WITH FEMALE RJ21 CONNECTOR AND 10/100 BASE T PATCH PANEL CATEGORY 5 AND POWER SUM RATED.

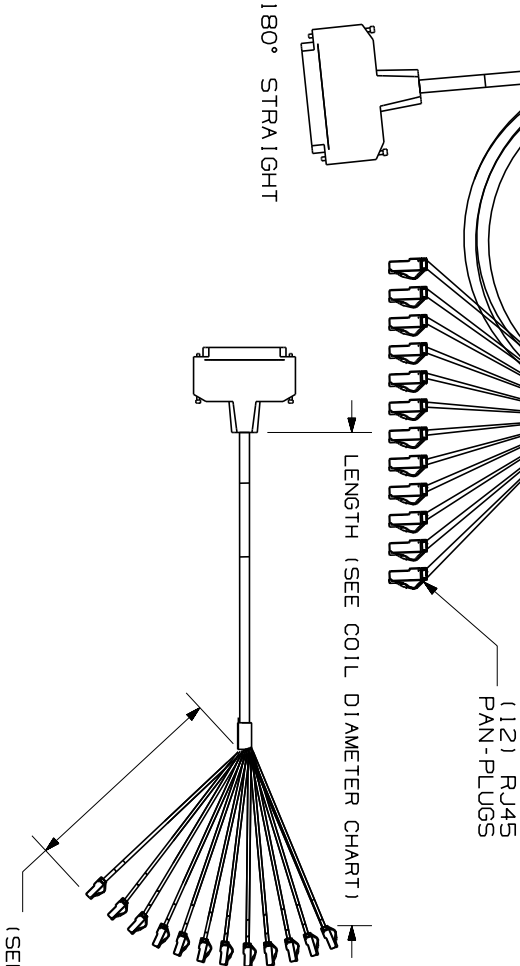

PLUG CORD LENGTH  
(SEE PLUG LENGTH CHART)

CAD FILENAME/LAYERS

MO2479KO\_DC276\_00A.PRT

**PANDUIT**  
CORP., TINLEY PARK, ILLINOIS

25 PAIR HYDRA PATCH CORD ASSY  
ONE 180° RJ21 MALE CONNECTOR TO  
TWELVE PAN-PLUGS (TAILS ALL ONE LENGTH)  
(UTPCH1X112PP25Y)  
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.XX) ± .031(.8) ANGLES ±

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY  
NER

DATE  
3-20-06

SCALE  
NONE

CHECKED BY

CONNECTOR HSG:  
UL94 V-0 THERMOPLASTIC  
CABLE JACKET: PVC

DATE

3-20-06

DWG  
NO.

SIZE

REV  
DATE  
BY  
CHK  
DESCRIPTION

ECN  
CHK  
CUST  
SUP

DATE  
3-20-06

CONNECTOR HSG:  
UL94 V-0 THERMOPLASTIC  
CABLE JACKET: PVC

DWG  
NO.  
02479-276  
A