FIBER SLACK MANAGER INCLUDES:

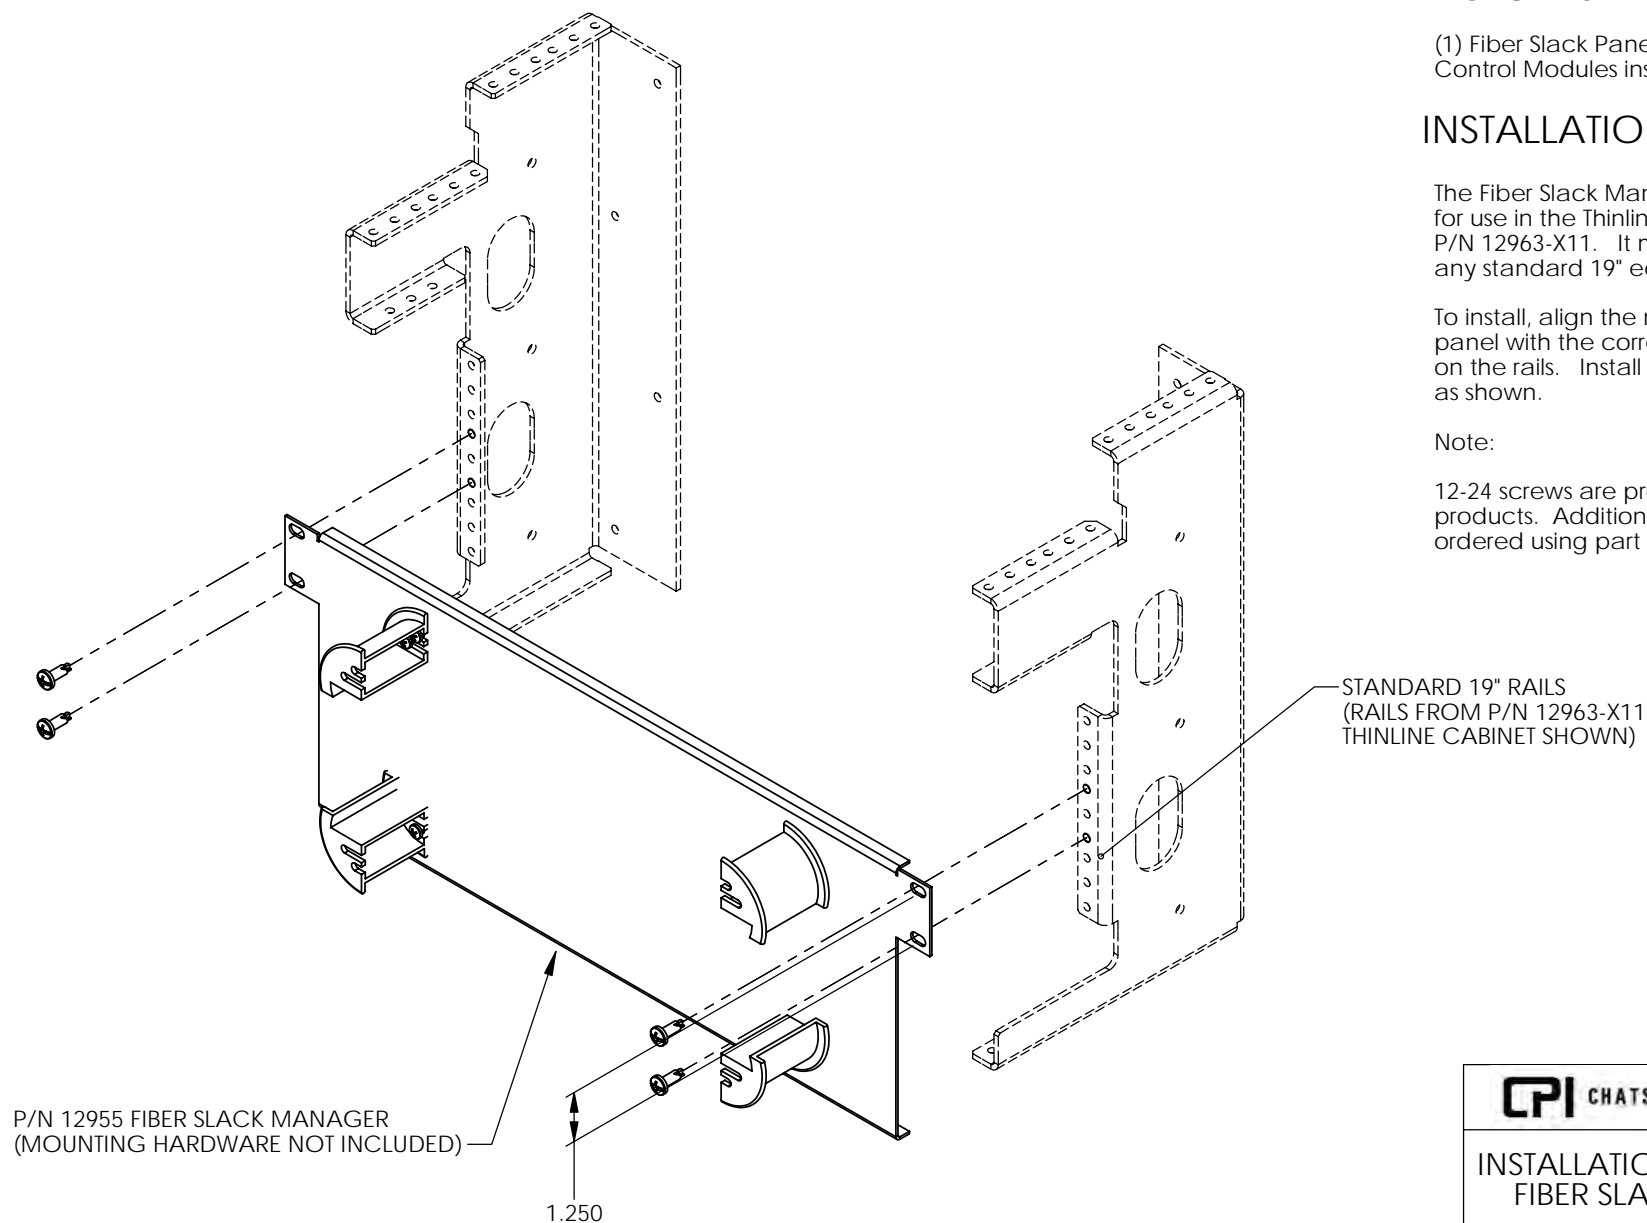(1) Fiber Slack Panel with (4) Radius Control Modules installed.

INSTALLATION:

The Fiber Slack Manager was designed for use in the Thinline Wall Cabinet P/N 12963-X11. It may also be used with any standard 19" equipment rails.

To install, align the mounting holes on the panel with the corresponding holes on the rails.   Install (4) mounting screws as shown.

Note:

12-24 screws are provided with CPI rack products. Additional screws may be ordered using part number 40605-001.

STANDARD 19" RAILS
(RAILS FROM P/N 12963-X11
THINLINE CABINET SHOWN)

P/N 12955 FIBER SLACK MANAGER
(MOUNTING HARDWARE NOT INCLUDED)

1.250

CPI CHATSWORTH PRODUCTS, INC.

INSTALLATION INSTRUCTIONS
FIBER SLACK MANAGER