

MC-PA14S-9-126

Low-Profile Adjustable Co-location Platform Kit, 14 ft face, 10 in to 30 in OD, includes pipe

Dimensions

Face Width	4.4 m 14.5 ft
Mounting Diameter, maximum	762.0 mm 30 in
Mounting Diameter, minimum	254.0 mm 10 in
Pipe Outer Diameter	60.3 mm 2 3/8 in
Height	3200.4 mm 126.0 in
Length	914.4 mm 36.0 in
Mounting Circumference, maximum	2392.7 mm 94.2 in
Mounting Circumference, minimum	797.6 mm 31.4 in
Weight	945.3 kg 2084.0 lb
Width	4419.6 mm 174.0 in

Environmental Specifications

EPA with 1/2 in (12 mm) radial ice	2.0 m ² 21.8 ft ²
EPA without ice	1.6 m ² 17.6 ft ²
Man Rating	250 lb vertical man load at 15 mph (BWS)
Wind Rating	120 mph (BWS) at 150 ft AGL 140 mph (3-second gust) at 150 ft AGL using Exposure D per FBC
Wind Rating Criteria	Four 72 in x 8 in panel antennas per sector
Wind Rating Test Method	TIA/EIA-222

General Specifications


Product Type	Co-location platform
Pipe Length	3200.4 mm 126.0 in
Pipe, quantity	9
Includes	Pipe mounts Platform Ring mount
Material Type	Hot dip galvanized steel
Mounting	Monopole, 254–762 mm (10–30 in) OD
Package Quantity	1
Sectors, quantity	3

MC-PA14S-9-126

POWERED BY



Outline Drawing

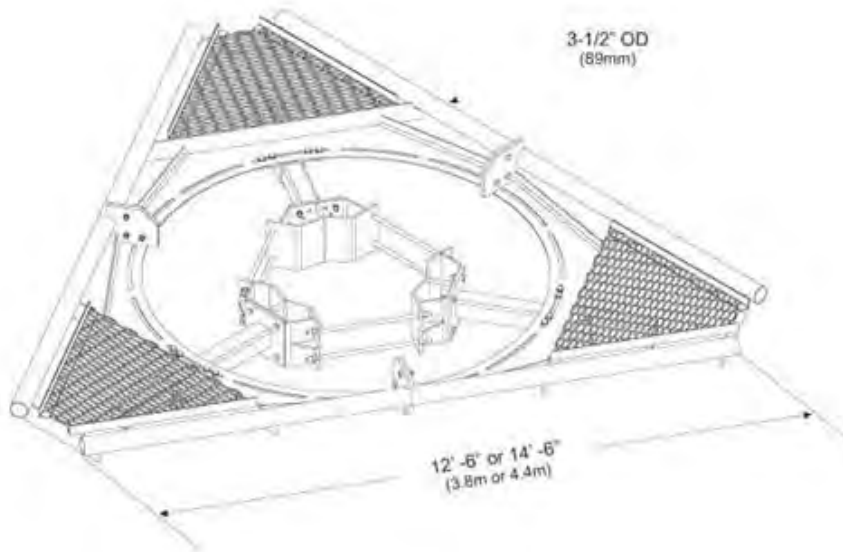

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system

Included Products

MT-537 — Plain End Pipe, 2-3/8 in OD x 126 in

MT-219-H — Pipe Mount Hardware Kit

MC-PA14S-B — Low-Profile Adjustable Co-location Platform Kit, 14 ft face, 10 in to 30 in OD

* Footnotes

EPA with 1/2 in (12 mm) radial ice	EPA—Effective Projected Area
EPA without ice	EPA—Effective Projected Area
Man Rating	BWS—Base Wind Speed
Wind Rating	BWS—Base Wind Speed; FBC—Florida Building Code