HOB-331-F SPECIFICATIONS


HANDSET TELEPHONE PANEL WITH A KEYPAD IN A OPEN ENCLOSURE STEEL HOUSING

Standard Analog Power, but also available in VoIP versions

Weather and vandal resistant stainless steel phone in an open enclosure wall mount black housing with telephone emblem on sides. Designed for standard keypad dialing. Equipped with marine quality chrome tone dial keypad and mechanical hookswitch or optional (-M) magnetic hookswitch, ID window, 32" hearing aid compatible armored cord handset, and tamper resistant security screws. HOB models available in black, (-R) red, or (-S) stainless steel.

SPECIFICATIONS

512011011010			
<u>Panel Size:</u> Open Enclosure Housing:	7 1/6"W x 11 1/4"H 7 1/4"W x 11 1/2"H x 5"D		
Weight:	Approximately 10 lbs.		
<u>Mounting Instructions:</u>	Open Enclosure Housing 4 holes spaced 8" x 5 7/8"		
Environment:	Temperature: -30°C (-22°F) to 60°C (140°F Humidity: 0%-90% non-condensating		
Input Power:	Telephone Line Powered		
Loop Current:	23mA min to 80mA max		
Impedance:	600 ohms		
<u>Type Jack:</u>	RJ11C		
Ringer Equivalency:	0.4A		
Hearing Aid Compatible:	Meets EIA standards		
UL & FCC Registration:	Certified		
ACCESSORIES:	301-064 Security Tool (required for installation)		

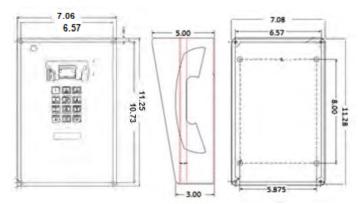

-M	-IVC	-ACH**	-LB	Open Enclosure Housing	-RIL	-RIS
Te	(VOLUME 3)	5	6		0	
Sealed Magnetic Hookswitch • Completely Sealed • No Moving Parts	Push Button Volume Control Background Noise reducer	Other Length armored cord from 14" to 72"(inches). Example: - ACH14 14" Long	Handset with internal steel lanyard (braided metal rope) and lanyard mounting bracket that is secured onto panel for added strength.	Standard Black Housing -R Red Housing -S Stainless Steel Housing	Ring Indicator Light located on the phone panel for visual ring indication	Ring Indicator Light located or the phone pane for visual ring indication



Providing Telecommunication Solutions Since 1930

519 SW Park Street
Okeechobee, FL
Voice 863-357-0798
Fax 863-357-0006

