

# HOB-333-D SPECIFICATIONS

## AUTODIAL TELEPHONE PANEL WITH HANDSET & SMART FEATURES IN A OPEN ENCLOSURE STEEL HOUSING


*Standard Analog Power, but also available in VoIP versions*

Weather and vandal resistant stainless steel phone in an open enclosure wall mount black housing with telephone emblem on sides. Designed to dial a preprogrammed number when the handset is lifted off-hook. Programmable from 1-25 digits, PBX, prefix, or access dialing capability, and incoming call block. Equipped with marine quality chrome mechanical hookswitch or optional (-M) magnetic hookswitch, ID window, 32" hearing aid compatible armored cord handset, and tamper resistant security screws. HOB models available in black, (-R) red, or (-S) stainless steel.



### SPECIFICATIONS

<b>Panel Size:</b>	7 1/6"W x 11 1/4"H
<b>Open Enclosure Housing:</b>	7 1/4"W x 11 1/2"H x 5"D
<b>Weight:</b>	Approximately 10 lbs.
<b>Mounting Instructions:</b>	Open Enclosure Housing 4 holes spaced 8" x 5 7/8"
<b>Environment:</b>	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensing
<b>Programming:</b>	Via DTMF Keypad
<b>Memory Retention:</b>	Lithium Battery-Long Life
<b>Input Power:</b>	Telephone Line Powered
<b>Loop Current:</b>	25mA min to 80mA max
<b>Impedance:</b>	600 ohms
<b>Type Jack:</b>	RJ11C
<b>Ringer Equivalency:</b>	0.4A
<b>Hearing Aid Compatible:</b>	Meets EIA standards
<b>UL &amp; FCC Registration:</b>	Certified
<b>ACCESSORIES:</b>	301-064 Security Tool (required for installation)

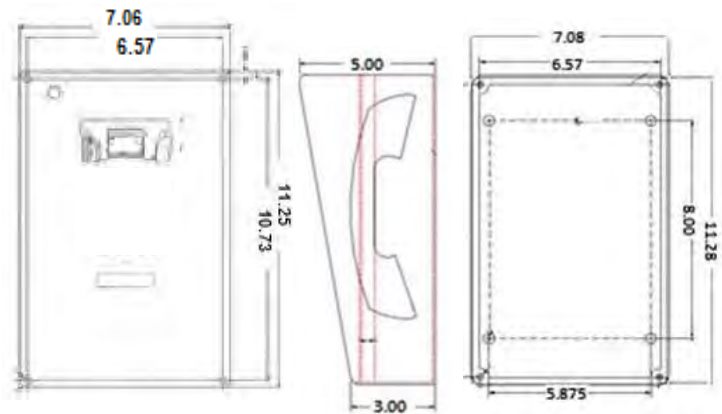

### ADDITIONAL OPTIONS

**IP - Voice over Internet Protocol Version available on all models (SIP)**

-M	-IVC	-ACH**	-LB	Open Enclosure Housing	-RIL	-RIS
<b>Sealed Magnetic Hookswitch</b> <ul style="list-style-type: none"> <li>Completely Sealed</li> <li>No Moving Parts</li> </ul>	Push Button Volume Control  Background Noise reducer	Other Length armored cord from 14" to 72"(inches). Example: <b>-ACH14</b> 14" Long	Handset with internal steel lanyard (braided metal rope) and lanyard mounting bracket that is secured onto panel for added strength.	Standard Black Housing <b>-R</b> Red Housing <b>-S</b> Stainless Steel Housing	Ring Indicator Light located on the phone panel for visual ring indication	Ring Indicator Light located on the phone panel for visual ring indication



*Providing Telecommunication Solutions Since 1930*

Communication Equipment  
& Engineering Company

<http://www.ceeco.net>  
Email: [sales@ceeco.net](mailto:sales@ceeco.net)

519 SW Park Street

Okeechobee, FL

Voice 863-357-0798

Fax 863-357-0006