

SSC-500-X SPECIFICATIONS

LOW POWER SPEAKERPHONE WITH AUTODIAL FOR RING-DOWN OPERATION

Standard Analog Power, but also available in VoIP versions

Stainless steel wall mount payphone size handsfree low power consumption speakerphone with push button for ring-down operation and red LED light to indicate phone is activated. Press button to disconnect call. Telephone can be programmed to cancel calls after 1, 3, or 5 minutes or no call time-out. Phone relies on external equipment to control calling. Equipped with weatherproof, puncture resistant speaker and microphone, instruction or advertising window, ID window, tamper resistant security screws, and mounting backplate.



SPECIFICATIONS

Panel Size: 7.5" W x 21" H x 4.10" D

Weight: Approximately 16 lbs.

Mounting Instructions: **Vertical Surface Mount:** Separate the cover assembly from the backplate. The backplate assembly is designed to be mounted on any flat vertical surface. Four mounting holes are provided

Environment: Temperature: -30°C (-22°F) to 60°C (140°F)
Humidity: 0%-90% non-condensing

Input Power: Telephone Line Powered

Loop Current: 27mA min to 80mA max

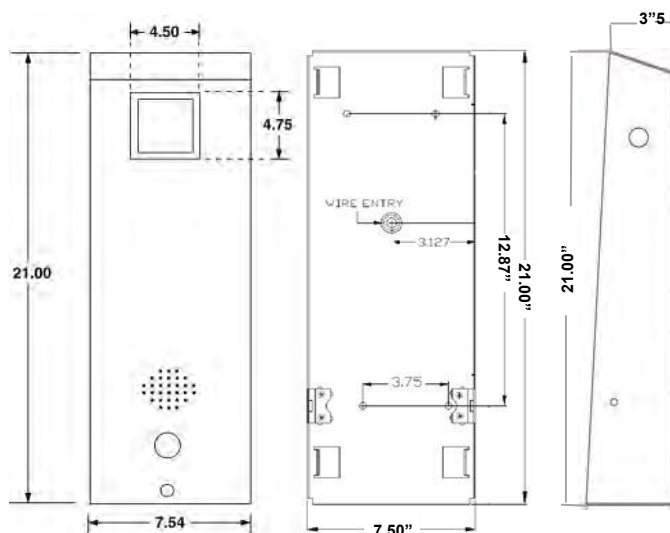
Impedance: 600 ohms

Type Jack: RJ11C

Ringer Equivalency: 0.4A




UL & FCC Registration: Certified

ACCESSORIES: 301-037 Security Tool
(required for installation)



ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-ADA	-RIS	-RIL	Additional Options & Features
			Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
<ul style="list-style-type: none">Red/ green LED call progress indicator lightBraille Emergency Plate "EMERG. PHONE"Red push button	Ring Indicator Flashing Blue Light (Requires AC Power)	Ring Indicator Light located on the phone panel for visual ring indication	



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

<http://www.ceeco.net>

Email: sales@ceeco.net

519 SW Park Street

Okeechobee, FL

Voice 863-357-0798

Fax 863-357-0006